

Flight Procedures Cover Page	Task Action: Abbreviated Amendment	Task Type: IAP	Estimated Chart Date: 05/19/2022	APWS Task ID: 94A4BB17A96F4070AD87F8C4E512E26F	APWS Project ID: CC17E2DA8718465384FBBE7BD76A9ECF
Procedure: RNAV (GPS) RWY 21 AMDT 0C		Enroute: NO	Specialist: Thibodeaux, Charles		Agreement Number:
Airport ID: KGBG			Airport City: GALESBURG		State: IL
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: MAGVAR UPDATE 8260.3 NEW CIRCLING RADII BASED ON ILS OR LOC RWY 3, AMDT 11, FLIGHT CHECKED ON 3/30/2021 PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION CONTACT JASON KRETSCHMER: 405.954.4019 03/14/22: THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 03/01/22. 1. ADDED "CHART CIRCLING ICON" TO ADDITIONAL FLIGHT DATA. <i>Digitally signed by</i> JASON KRETSCHMER Mar 14, 2022					

QUALITY
24
CHECKED

QUALITY
47
CHECKED


QUALITY
41
CHECKED

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 1700 then climbing right turn to 3000 direct EJIYU and hold.

AWOS-3 118.975	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 120.7	UNICOM 123.0 (CTAF) 0
-------------------	--------------------------------------	-------------------	--------------------------

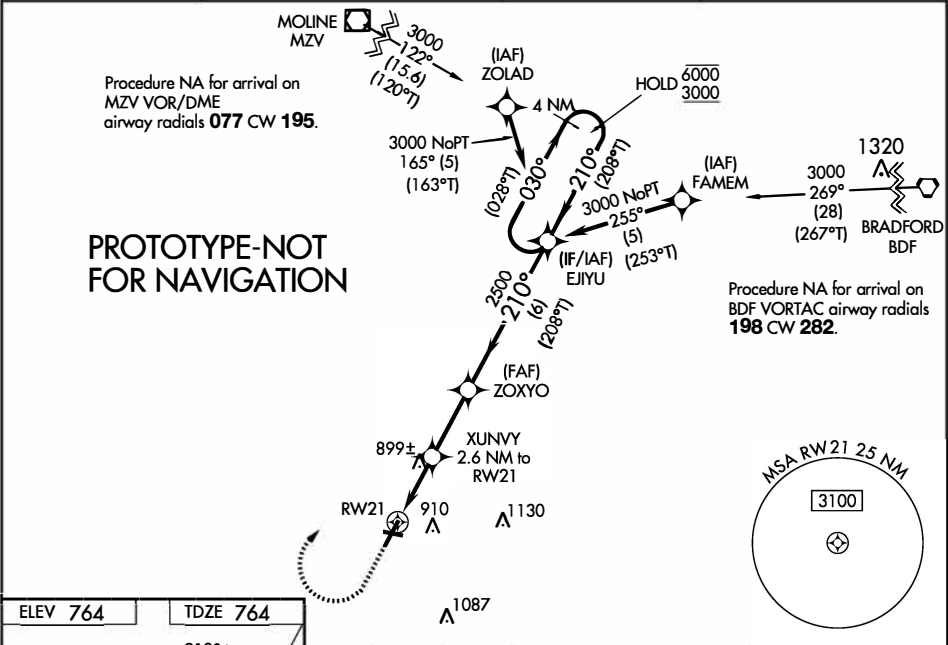

ELEV 764 TDZE 764

210° to RW21

843

10

3600 X 100

5792 X 130

REIL Rwy 21 0

HIRL Rwy 3-21 0

MIRL Rwy 10-28 0

1700 3000 EJIYU

XUNVY 2.6 NM to RW21

ZOXYO

EJIYU

4 NM Holding Pattern

030° 6000

210° 3000

GP 3.00° TCH 55

1.1 1.5 2.7 NM 6 NM

1640 2500

1.1 NM to RW21

RW21

CATEGORY	A	B	C	D
LPV DA	964-¾		200 (200-¾)	
LNAV/VNAV DA	1060-⅞		296 (300-⅞)	
LNAV MDA	1160-1 396 (400-1)		1160-1½ 396 (400-1½)	
CIRCLING	1220-1 456 (500-1)		1380-1¾ 616 (700-1¾)	1620-2¾ 856 (900-2¾)

WAAS CH 50428 W21A	APP CRS 205°	Rwy Idg TDZE 764 Apt Elev 764	5792 764 764
--	------------------------	---	---

RNAV (GPS) RWY 21



GALESBURG MUNI (GBG)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). Circling Rwy 10 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Macomb altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV visibility to ¾ SM all Cats, increase LNAV/VNAV visibility to 1¼ SM all Cats, increase LNAV Cats C/D visibility to 1¾ SM. VDP and Baro-VNAV NA when using Macomb altimeter setting.

MISSED APPROACH: Climb to 1700 then climbing right turn to 3000 direct EJIYU and hold.

AWOS-3 118.975	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 120.7	UNICOM 123.0 (CTAF) 1
--------------------------	---	--------------------------	---------------------------------

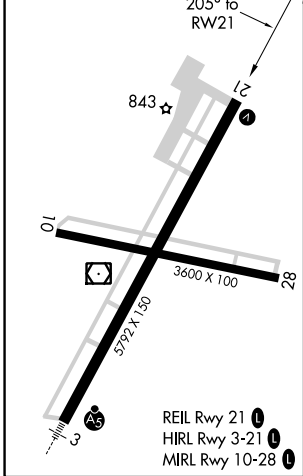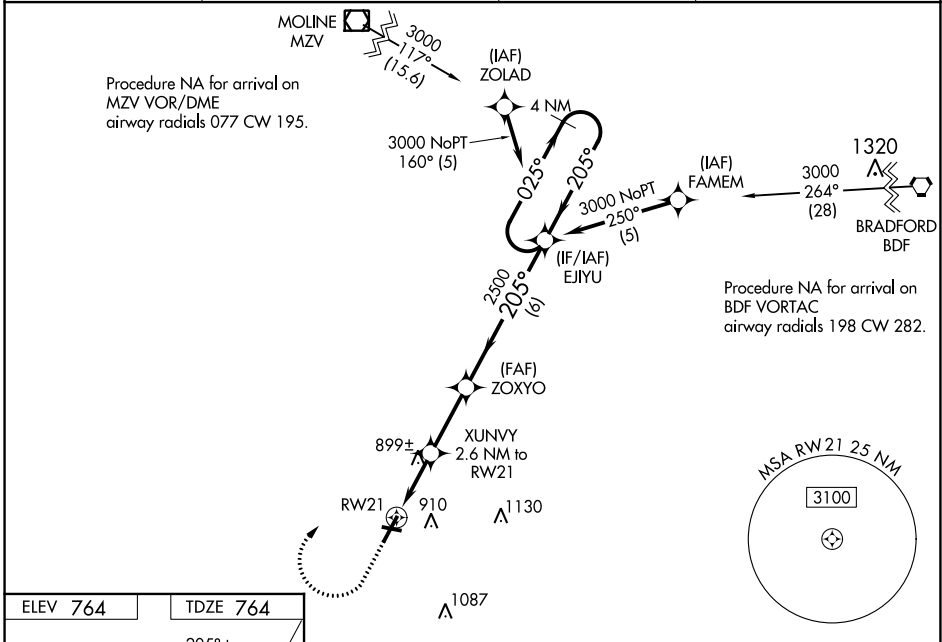


	1700	3000	EJIYU	
	↑	↪	✧	
*LNAV only			XUNVY 2.6 NM to RW21	ZOXYO 2500
			*1.1 NM to RW21	
			RW21	
			*1640	
			1.1 1.5 2.7 NM	6 NM
				EJIYU
				4 NM Holding Pattern
				025° → 3000
				← 205°
				GP 3.00° TCH 55
CATEGORY	A	B	C	D
LPV DA	964-¾		200 (200-¾)	
LNAV/VNAV DA	1060-⅞		296 (300-⅞)	
LNAV MDA	1160-1 396 (400-1)		1160-1½ 396 (400-1½)	
CIRCLING	1220-1 456 (500-1)		1220-1½ 456 (500-1½) 1340-2 576 (600-2)	

EC-3, 15 JUL 2021 to 12 AUG 2021

EC-3, 15 JUL 2021 to 12 AUG 2021

KGBG
RNAV (GPS) RWY 21
EJIYU HOLDING
500K

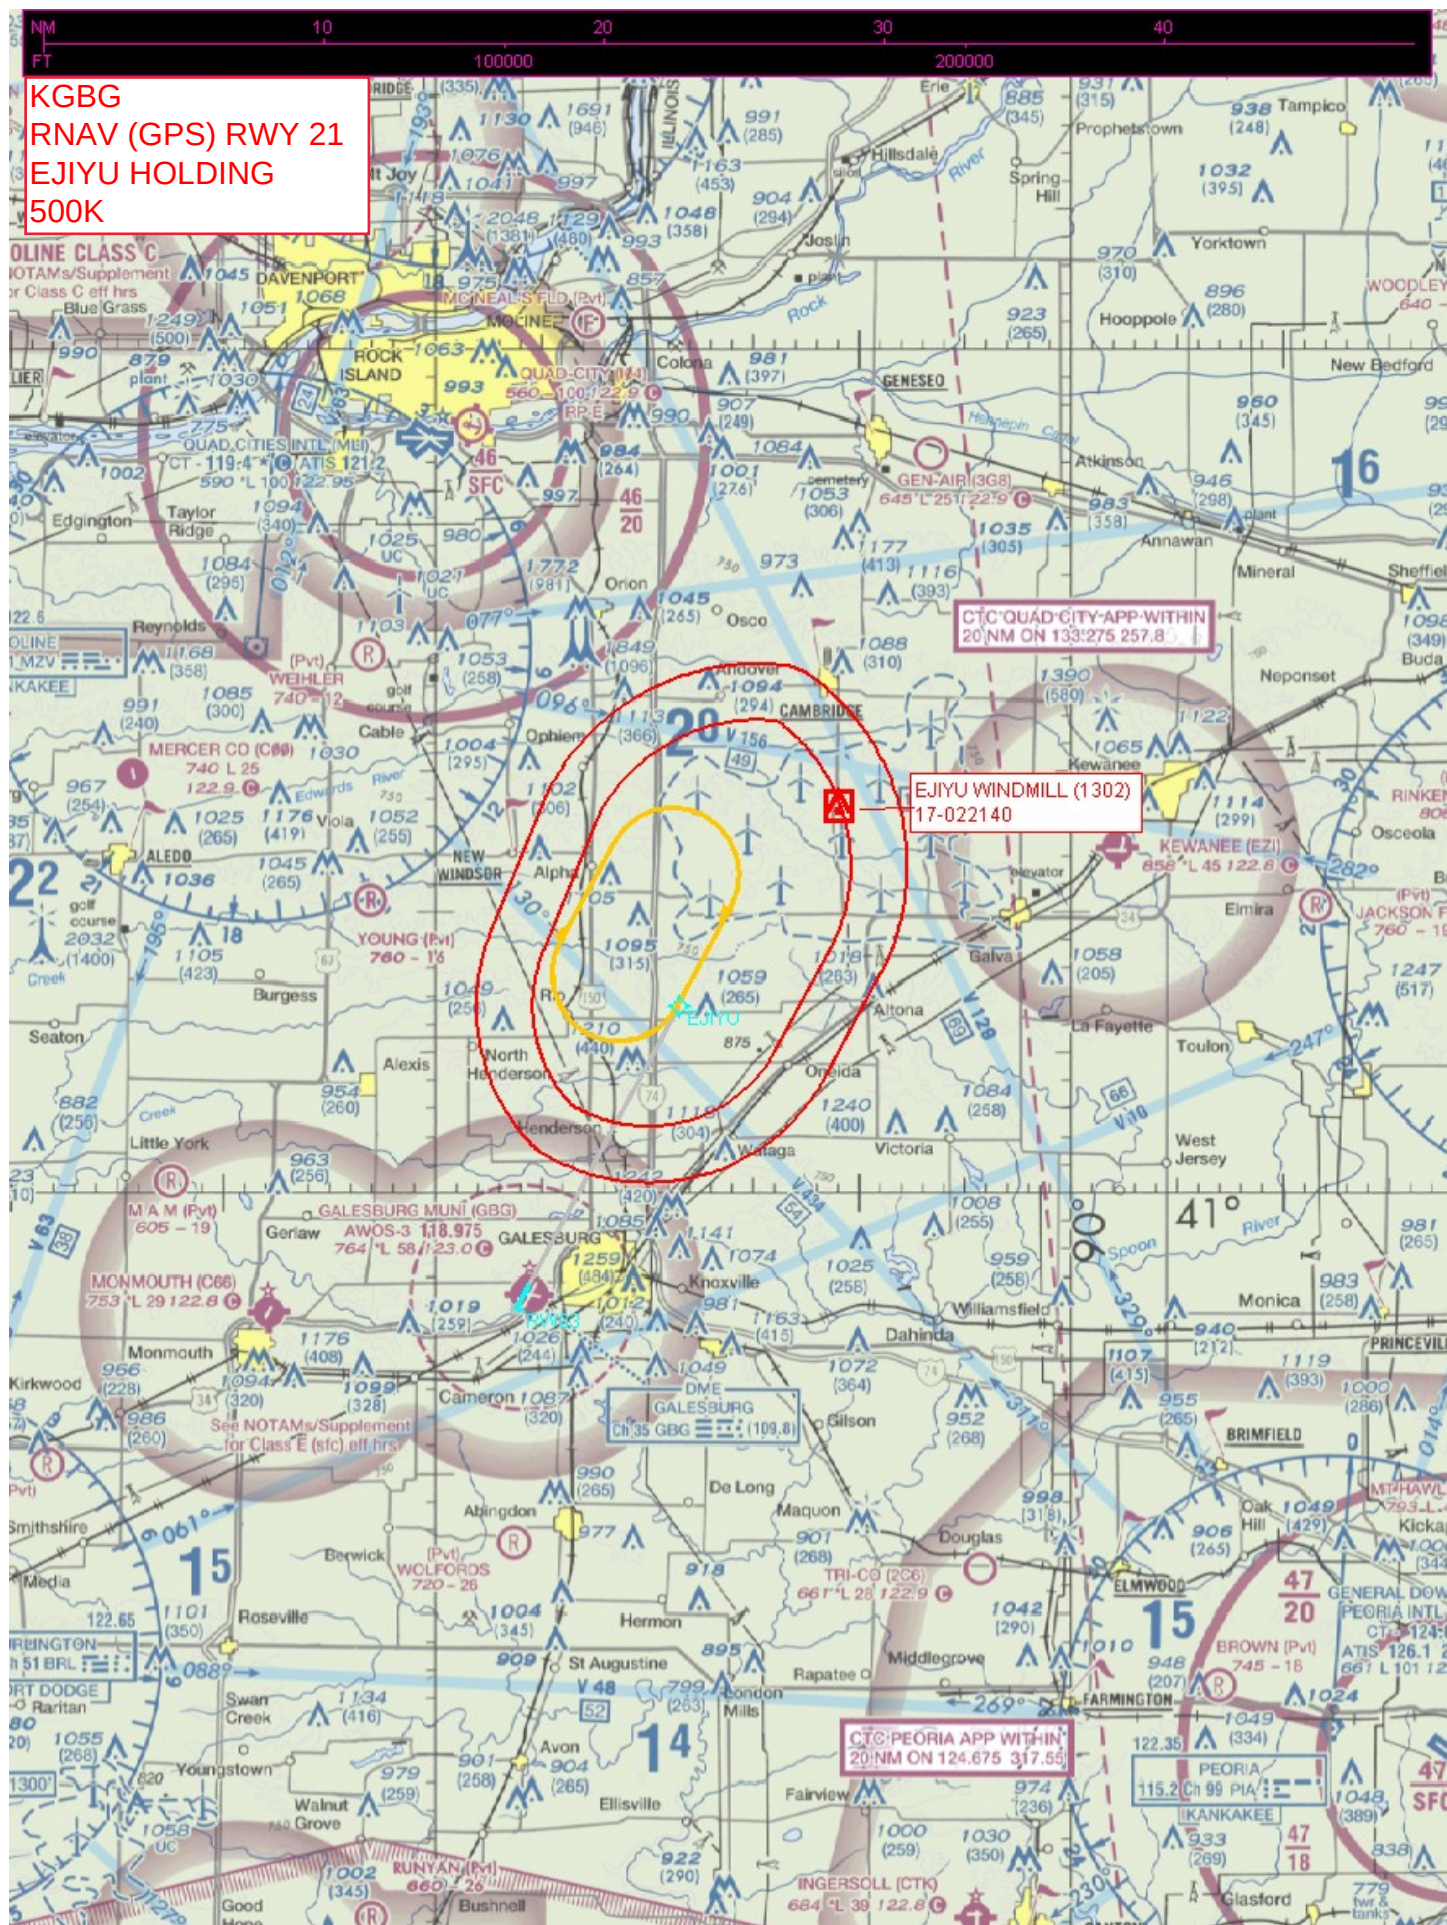

KGBG
RNAV (GPS) RWY 21
100K

