


WAAS CH 78401 W36A	APP CRS 358°	Rwy Ldg TDZE Apt Elev	6000 443 447
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

MESQUITE METRO (HQQZ)

RNP APCH - GPS.				MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct YEAGR and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using DAL altimeter setting. When local altimeter setting not received, use DAL altimeter setting and increase LPV DA to 739 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 806 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM.					
AWOS-3 118.175	LONE STAR APP CON 125.2 343.65	MESQUITE TOWER★ 120.3 (CTAF) 0	GND CON 118.85	UNICOM 123.05	

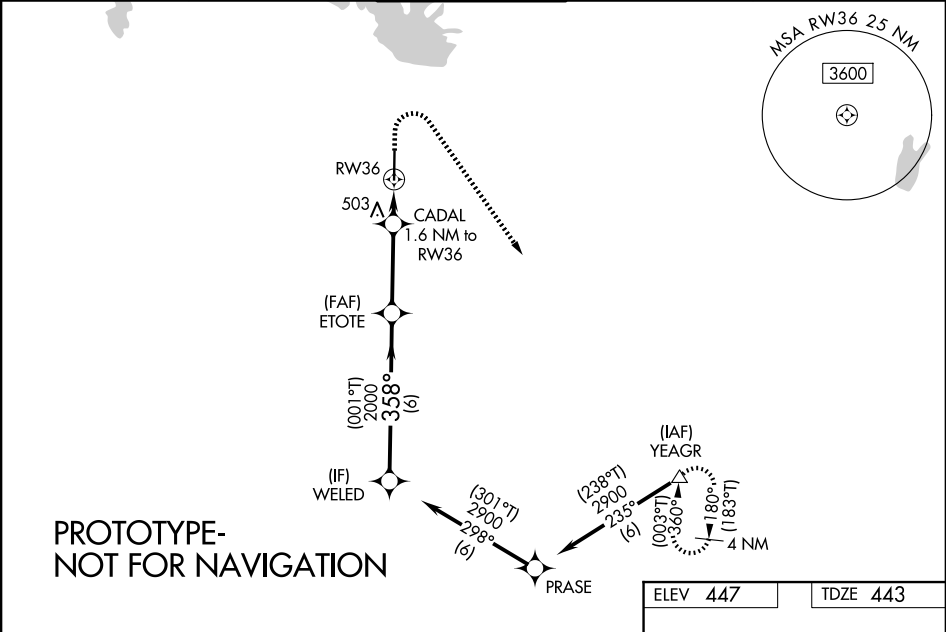

WELED 2900 GP 3.00° TCH 45 ETOTE 2000 2000 CADAL 1.6 NM to RW36 0.9 NM to RW36 RW36 980 900 3000 YEAGR					81 TWR 535 6000 X 100 36 358°				
6 NM 3.2 NM 0.7 NM 0.9 NM									
CATEGORY		A		B		C		D	
LPV DA		693-¾		250 (300-¾)				NA	
LNAV/VNAV DA		760-⅞		317 (400-⅞)				NA	
LNAV MDA		760-1		317 (400-1)				NA	
CIRCLING		960-1		513 (600-1)		1160-2 713 (800-2)		NA	