


CLEVELAND DEP CON
125.35 346.325
ATIS
125.25
CLNC DEL
339.8
121.9 (when tower closed)
GND CON
121.9 339.8
LAKEFRONT TOWER ★
124.3 (CTAF) 339.8

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC


NOTE: Rwy 6R/24L: Takeoff minimums NA
when control tower closed.

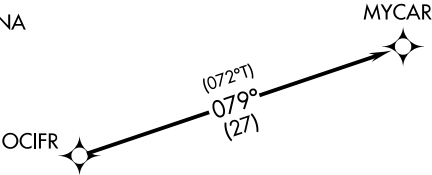

PROTOTYPE- NOT FOR NAVIGATION



TAKEOFF MINIMUMS
Rwy 24R: Standard.
Rwy 6L: Standard with minimum climb of 220'/NM to 1100.
Rwy 6R: Standard with minimum climb of 290'/NM to 1100.
Rwy 24L: Standard with minimum climb of 517'/NM to 1000.



NOTE: Chart not to scale.

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF ALL RUNWAYS: Climb on assigned heading for RADAR vectors to OCIFR,
then on track 079° to MYCAR.
Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.