

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: 9C65CD05B290436E9BD7922EB572CF00	APWS Project ID: C02C0BE3A0DE4EA0AC76FA27915085C6
Procedure: RNAV (GPS) RWY 35R AMDT 2		Enroute: NO	Specialist: Ulvestad, Arthur		Agreement Number:
Airport ID: KABI			Airport City: ABILENE		State: TX
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRPORT DATA USED INITIAL SEGMENTS INECO AND KEYJO EXTENDED TO 9.3 NM. MOVED IBRIF AND GOFDO FIXES. CRC REMAINDER: 8F0ACA0B CONTACT: RAKE MCGRAW 405-954-8711 QUALITY 20 CHECKED QUALITY 41 CHECKED					

FIPC BASIC FORM							
PROCEDURE: RNAV (GPS) RWY 35R AMDT 2			AIRPORT NAME: ABILENE RGNL		AIRPORT ID: KABI	SPECIAL CONTROL NO: OG-04-089-26	
FAC ID: KABI35R.02		CITY: ABILENE			ST: TX	ORIG CHART DATE: 09/03/2026	
DFL TYPE: PROC/S	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:		PTS TASK ID: 9C65CD05B290436E9BD7922EB572CF00		
PREFLIGHT NOTES							
REVIEWER:					DATE:		
COMMENTS:					CHECK ONE:		
					☐ FLT CK REQ ☐ NFCR ☐ REJECT		
							YES
					CPV COMPLETE?		X
PROCEDURE RESULTS							
INSPECTION DATE: 04/29/2026		CREW #: VN423	N #: N84	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: terry hester @ 04/29/2026 17:48			PRINTED NAME: HESTER, TERRY LEE			NOTAM INITIATED? ☐ YES ☒ NO	
FLIGHT INSPECTOR REMARKS: Special Number OG-04-089-26, Abilene RGNL, Abilene TX, RNAV (GPS) RWY 35R Amdt 2, SAT							
IN-FLIGHT OBSTACLE REPORT							
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):		BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:

WAAS CH 97517 W35A	APP CRS 355°	Rwy Ldg TDZE 1776 Apt Elev 1791
--	------------------------	---




RNAV (GPS) RWY 35R


ABILENE RGNL (ABI)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 4000 direct GOFDO and hold, continue climb-in-hold to 4000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to 1½ SM. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

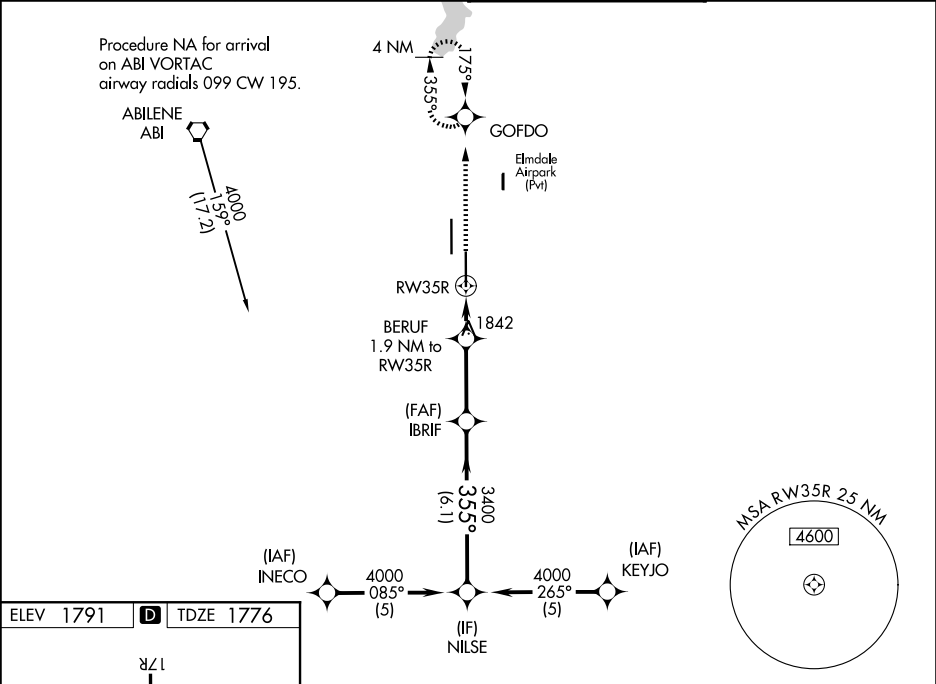

ELEV 1791	D	TDZE 1776
-----------	----------	-----------

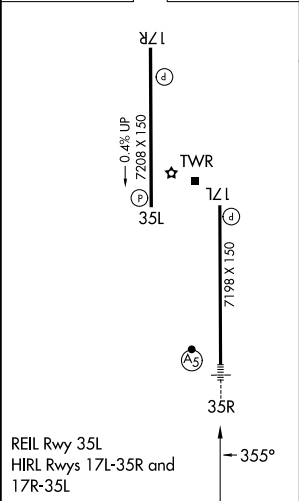

4000	GOFDO	BERUF 1.9 NM to RW35R	IBRIF	NILSE	4000
*LNAV only.					
*1.3 NM to RW35R					
*2440					
GP 3.00° TCH 58					
CATEGORY A B C D E					
LPV DA** 1976/24 200 (200-½)					
LNAV/VNAV DA 2189/40 413 (400-¾) 2189/50 413 (400-1)					
LNAV MDA 2260/24 484 (500-½) 2260/50 484 (500-1)					
CIRCLING 2300-1 509 (600-1) 2320-1 529 (600-1) 2420-1¾ 629 (700-1¾) 2460-2 669 (700-2) 2620-3 829 (900-3)					

SC-2, 27 NOV 2025 to 25 DEC 2025

SC-2, 27 NOV 2025 to 25 DEC 2025