
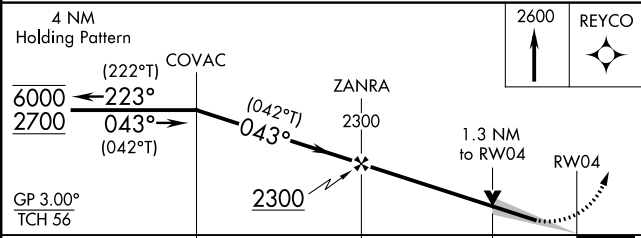


Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 12/28/2023	APWS Task ID: 9CD124E5DF184AA9B03786B8A6E284AA	APWS Project ID: 10E28889C7434947A3802BFD8ABD9A49
Procedure: RNAV (GPS) RWY 4 AMDT 0E		Enroute: NO	Specialist: Raimi, Kamarudini		Agreement Number:
Airport ID: KSPI			Airport City: SPRINGFIELD		State: IL
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: UTILIZED ACTIVE AIRNAV DATA FOR KSPI RWY 04. DELETED NOTE: PROCEDURE NA FOR ARRIVAL AT GINIA VIA V50 WESTBOUND; VICTOR ROUTE REMOVED DUE TO VOR MON. UPDATED CRC REMAINDER DUE TO LTP/FTP LAT/LONG AND LTP/FTP ELLIPSOIDAL HEIGHT. CONTACT DAVID TEFFETELLER: AJV-A430, 202-267-5177. QUALITY 20 CHECKED QUALITY 9 CHECKED BEGUE					


WAAS CH 70309 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	8001 592 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.				MALSR 	MISSED APPROACH: Climb to 2600 direct REYCO and hold.	
▼ ▲ Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1 3/8 SM. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 912 feet; increase LNAV/VNAV DA to 989 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C/D 1/4 SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to RVR 4500.						
ATIS 127.65 270.1		SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95

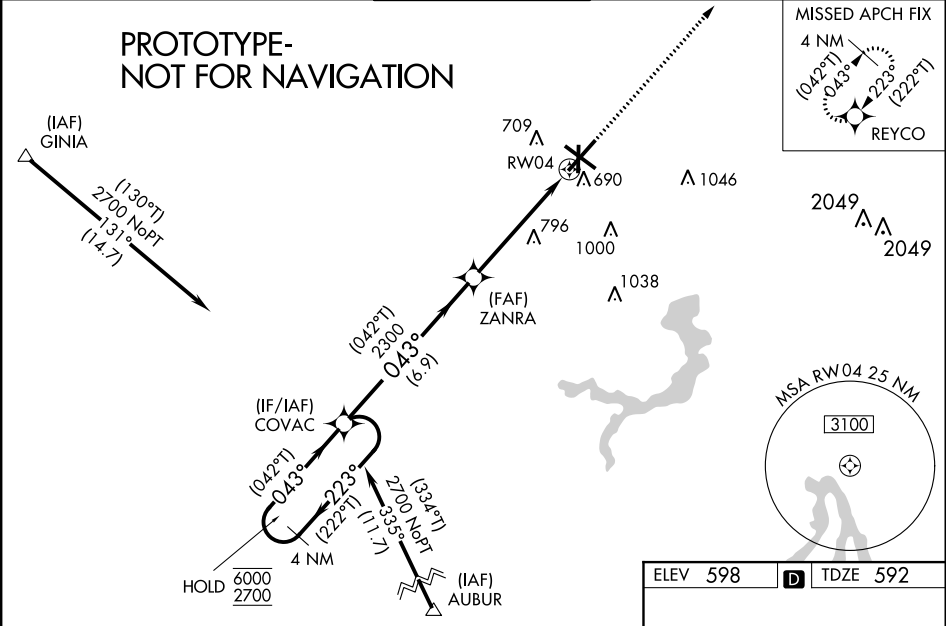

CATEGORY	A	B	C	D
LPV DA		854/24	262 (300-1/2)	
LNAV/VNAV DA		931/26	339 (400-1/2)	
LNAV MDA	1060/24	468 (500-1/2)	1060/50	468 (500-1)
CIRCLING	1060-1 462 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)

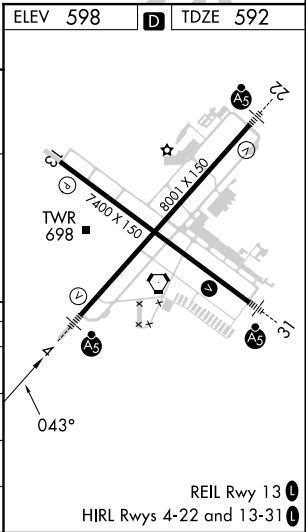


WAAS CH 70309 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---



OLD


RNAV (GPS) RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

▼ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -16°C (4°F) and above 47°C (116°F). When local altimeter setting not received, use Lincoln altimeter setting: increase all DA 57 feet and MDA 60 feet, increase Circling Cat C and D visibility ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inoperative MALSR increase LPV all Cats visibility to RVR 5000.	MALSR 	MISSED APPROACH: Climb to 2600 direct REYCO and hold.
---	--	--

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

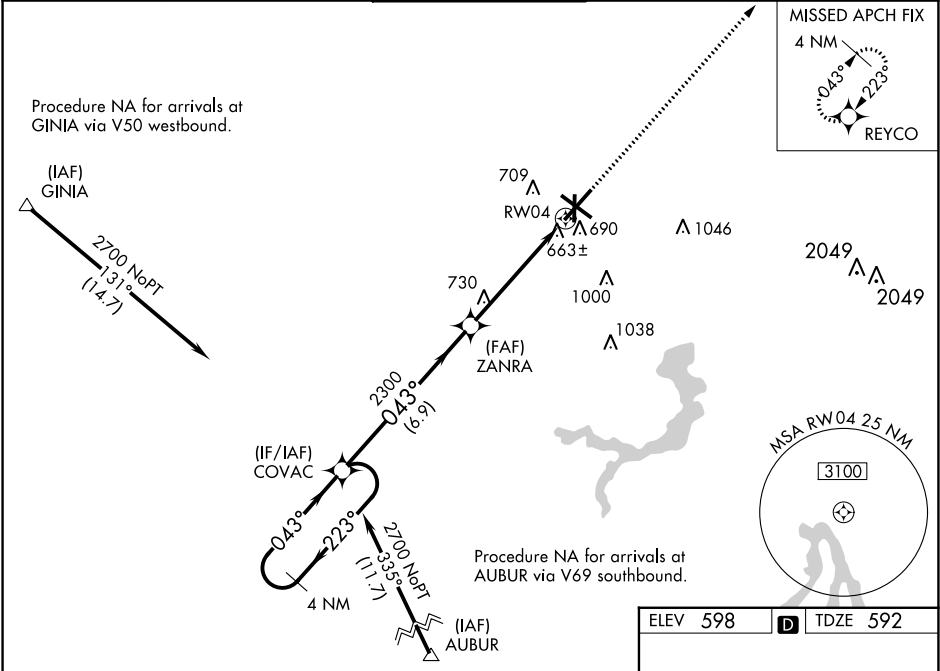

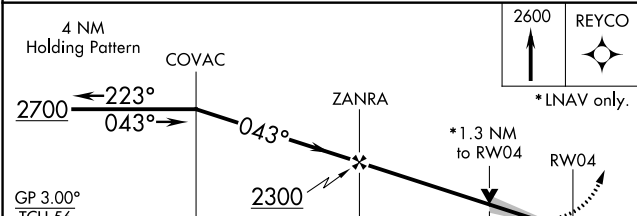4 NM Holding Pattern					2600	REYCO
					*LNAV only.	
GP 3.00° TCH 56					*1.3 NM to RW04	
					RW04	
CATEGORY	A	B	C	D		
LPV DA	854/24		262 (300-½)			
LNAV/VNAV DA	931/40		339 (400-¾)			
LNAV MDA	1060/24 468 (500-½)		1060/50 468 (500-1)			
CIRCLING	1060-1 462 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)		

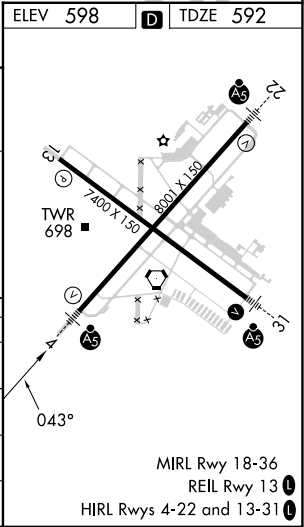

EC-3, 13 JUL 2023 to 10 AUG 2023

EC-3, 13 JUL 2023 to 10 AUG 2023