

WAAS CH 65738 W23A	APP CRS 236°	Rwy Idg TDZE Apt Elev	3035 834 836
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 23

SMITH FLD (SMD)

RNP APCH - GPS.	▼ ▲ NA ❄ -22°C Rwy 23 helicopter visibility reduction below 1 SM NA. Circling to Rwy 13/31 NA at night. When local altimeter setting not received, use FWA altimeter setting and increase all MDAs 40 feet and LNAV visibility Cat C ⅓ SM and LP visibility Cat C ⅓ SM.	MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.
-----------------	--	--

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

PROTOTYPE-NOT FOR NAVIGATION

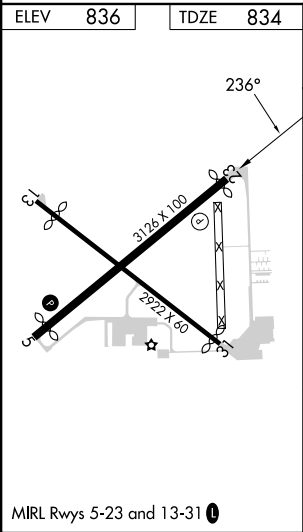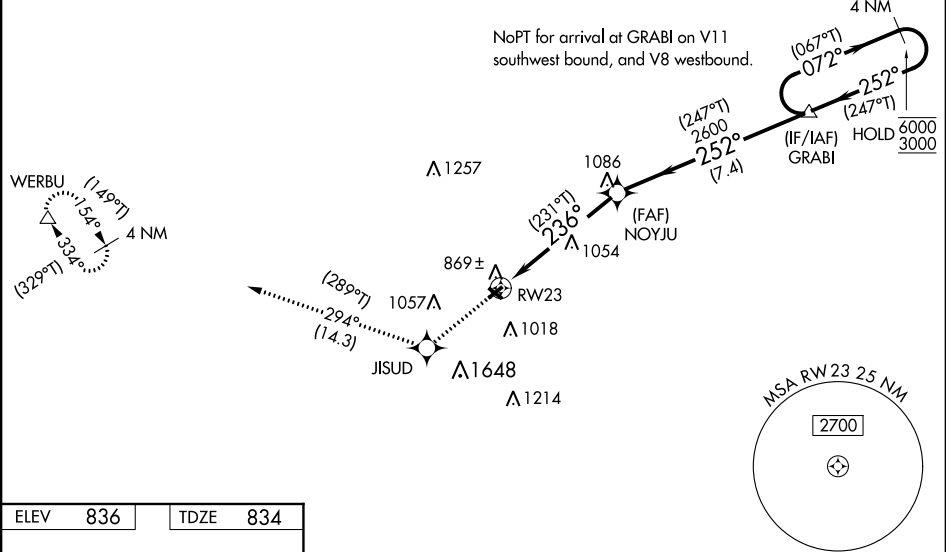

2700	JISUD	tr 294°	WERBU	Visual Segment - Obstacles.	4 NM Holding Pattern
↑	✦		△		
				GRABI	(067°T) 072° → 6000 ← 252° (247°T) 3000
				NOYJU	(247°T) 252°
				RW23	(231°T) 238° 2600
					5.4 NM 7.4 NM
CATEGORY	A	B	C	D	
LP MDA	1360-1	526 (600-1)	1360-1½ 526 (600-1½)	NA	
LNAV MDA	1400-1	566 (600-1)	1400-1½ 566 (600-1½)	NA	
CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA	