


WAAS CH 70603 W33A	APP CRS 328°	Rwy Ldg TDZE Apt Elev	4000 367 367
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 33

COULTER FLD (CFD)

RNP APCH - GPS.		HOUSTON APP CON 134.3 360.85	
<p>▼ Baro-VNAV and VDP NA when using CLL altimeter setting. When local altimeter setting not received, use CLL altimeter setting and increase LPV and LNAV/VNAV DA to 667 feet; increase all MDAs 40 feet.</p>		<p>MISSED APPROACH: Climb to 2500 direct NUCIB and hold.</p>	
AWOS-3PT 125.975	CLL ASOS 126.85	UNICOM 123.0 (CTAF) ①	

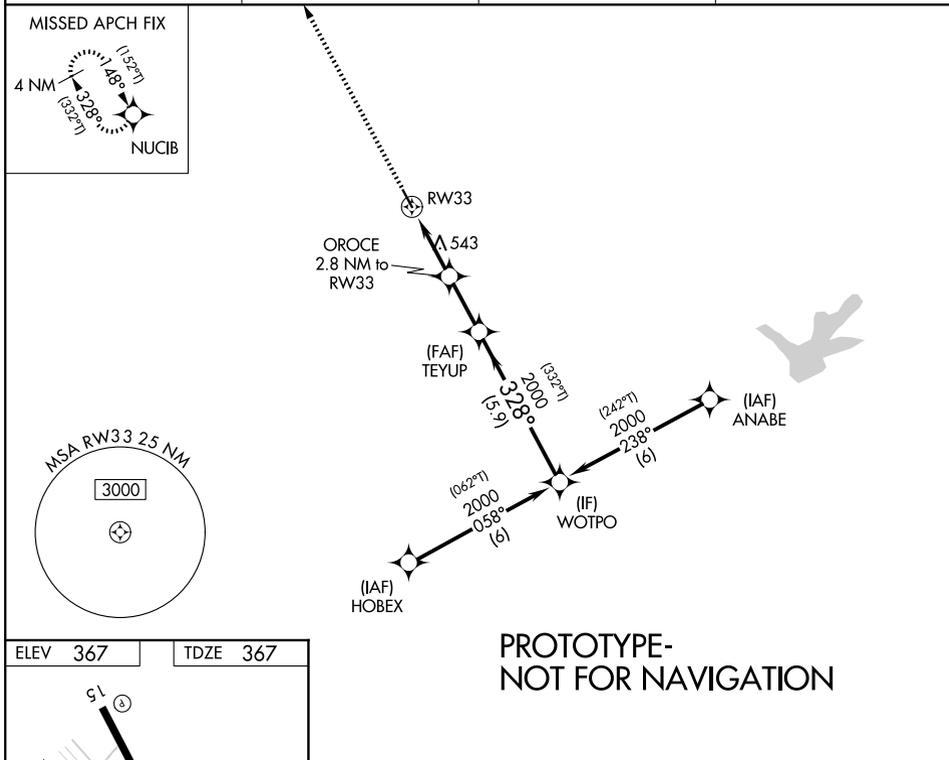

**PROTOTYPE-
NOT FOR NAVIGATION**

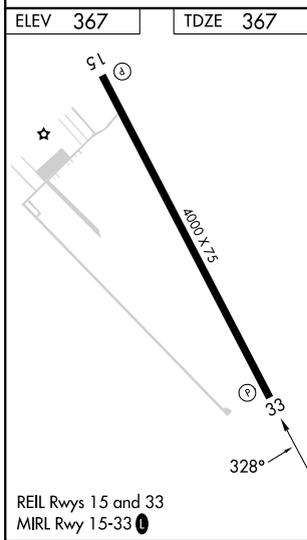

2500	NUCIB	VGSi and RNAV glidepath not coincident (VGSi Angle 3.50/TCH 40).			
CATEGORY		A	B	C	D
LPV DA		642-1	275 (300-1)	NA	
LNAV/VNAV DA		642-1	275 (300-1)	NA	
LNAV MDA		880-1	513 (600-1)	NA	