

WAAS CH 45716 W35A	APP CRS 354°	Rwy Idg 5001 TDZE 956 APT Elev 971
--	------------------------	---

RNAV (GPS) RWY 35

PAULS VALLEY MUNI (KPVJ)

RNP APCH - GPS.




WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE 1F0 ALTIMETER SETTING AND INCREASE LPV DA TO 1252 FEET AND ALL VISIBILITIES 1/8 SM. INCREASE LNAV/VNAV DA TO 1543 FEET AND ALL VISIBILITIES 3/8 SM. INCREASE ALL MDAS 100 FEET AND LNAV VISIBILITY CAT C/D 1/4 SM, AND CIRCLING VISIBILITY CAT C/D 1/2 SM. BARO-VNAV AND VDP NA WHEN USING 1F0 ALTIMETER SETTING. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -16°C OR ABOVE 54° C.

MISSED APPROACH:
CLIMB TO 3000 DIRECT
MELIE AND HOLD.

AWOS-3 118.675	FORT WORTH CENTER 124.75 323.0	UNICOM 122.8 (CTAF)
---------------------------------	---	--------------------------------------

PROTOTYPE-NOT FOR NAVIGATION

MISSED APCH FIX

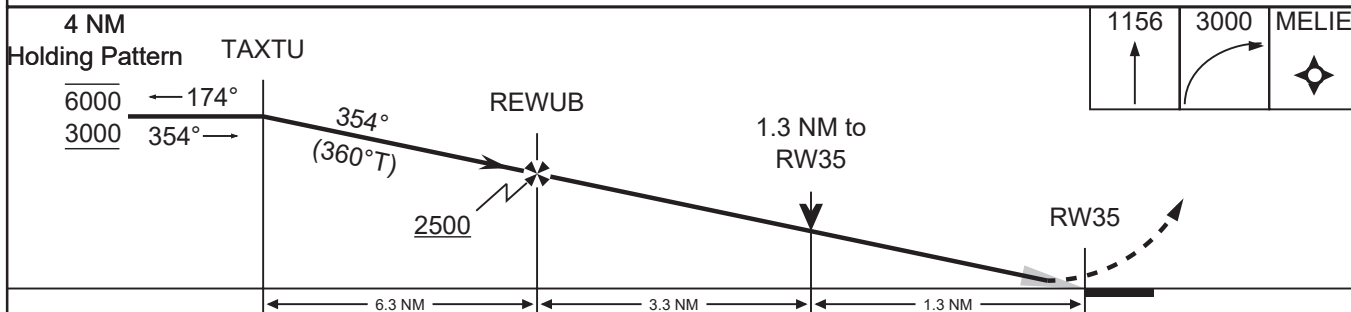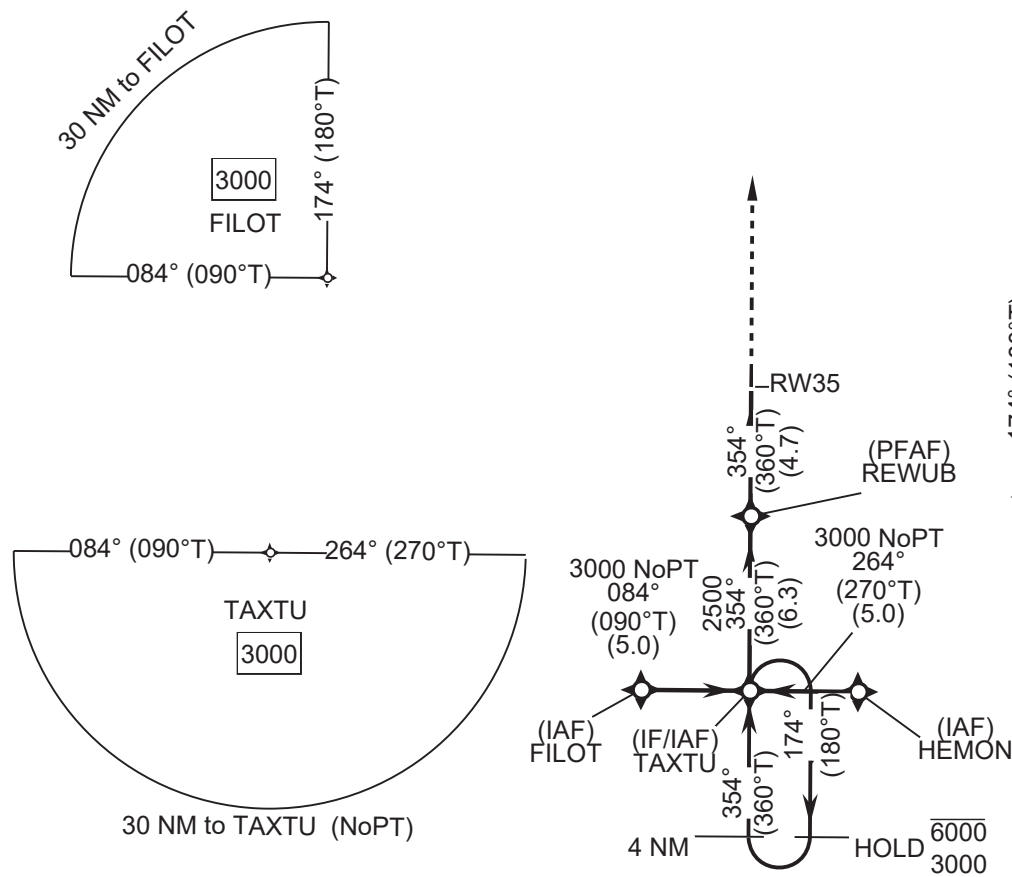

CATEGORY	A	B	C	D
LPV	1156-3/4 200			
LNAV/VNAV	1447-1 3/8 491			
LNAV	1420-1 464		1420-1 3/8 464	
CIRCLING	1440-1 469	1540-1 569	1760-2 1/4 789	1760-2 1/2 789