

WAAS CH 60941 W23A	APP CRS 227°	Rwy Ldg TDZE Apt Elev	5003 799 800
----------------------------------------	------------------------	-----------------------------	-----------------------------------------



RNAV (GPS) RWY 23

CRAWFORDSVILLE RGNL (CFJ)


RNP APCH - GPS.		MISSED APPROACH: Climb to 2700 direct YONUG and hold.
<p>▼ Rwy 23 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using GPC altimeter setting. When local altimeter setting not received, use GPC altimeter setting; increase LPV DA to 1111 feet, LNAV/VNAV DA to 1252 feet and all visibilities 1/4 SM; increase all MDAs 60 feet and LNAV and Circling Cats C and D visibilities 1/4 SM.</p>		

AWOS-3PT 125.65	INDIANAPOLIS APP CON 119.05 317.8	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------------	---------------------------------

PROTOTYPE-NOT FOR NAVIGATION

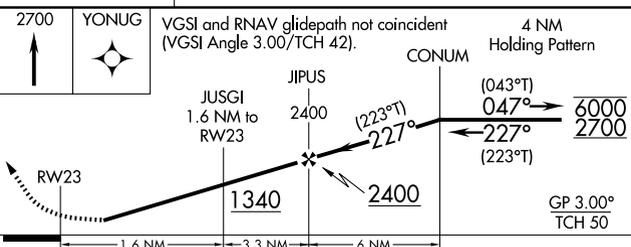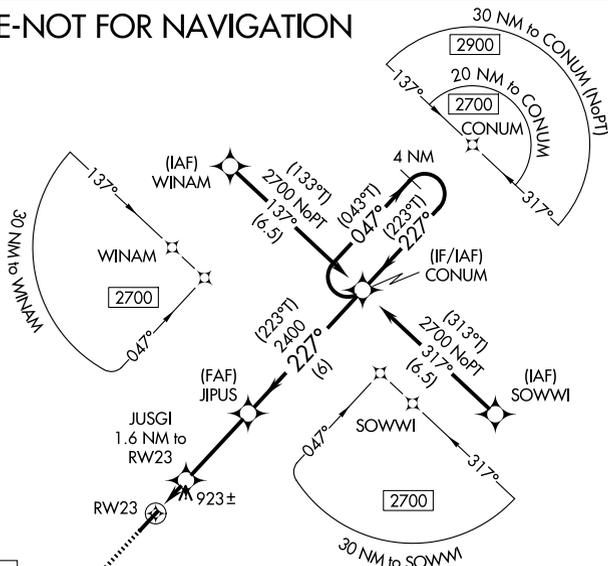

ELEV 800	TDZE 799
----------	----------

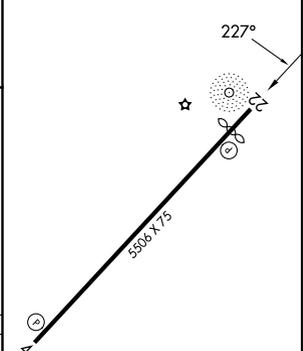

CATEGORY	A	B	C	D
LPV DA		1059-1	260 (300-1)	
LNAV/VNAV DA		1200-1 1/8	401 (500-1 1/8)	
LNAV MDA	1200-1	401 (500-1)	1200-1 1/8	401 (500-1 1/8)
CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1 3/4 640 (700-1 3/4)	1520-2 1/4 720 (800-2 1/4)

REIL Rwy 4 and 22 0
MIRL Rwy 4-22 0