

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 10/31/2024	APWS Task ID: AAF2AB9692BE46A69C56D4CE976EA6A4	APWS Project ID: 32E31EFCA8624C4788B00D97BFC5F516
Procedure: ILS OR LOC RWY 4R AMDT 3		Enroute: NO	Specialist: Dean, Kelly		Agreement Number:
Airport ID: KLIT			Airport City: LITTLE ROCK		State: AR
Facility ID: LIT	Facility Type: VORTAC	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: POC FOR THIS ACTION IS CAS TABAKA 405-954-7931 QUALITY 38 CHECKED QUALITY 34 CHECKED					

LOC/DME I-CNL	APP CRS	Rwy Idg	7200
111.3	047°	TDZE	260
Chan 50		Apt Elev	266

ILS or LOC RWY 4R






BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

Simultaneous approach authorized. Rwy 4R helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS 4R all Cats visibility to RVR 4500; increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 2 SM; increase OGRAY fix minimums S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on LIT VORTAC R-122 to ATERS/PBF 24.8 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

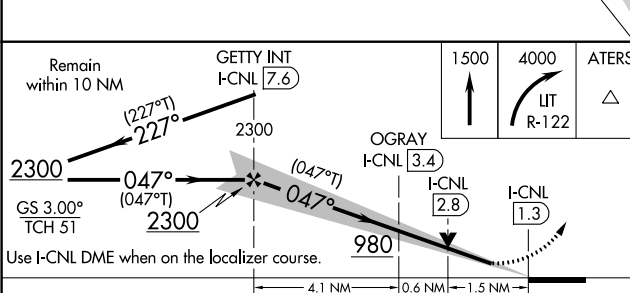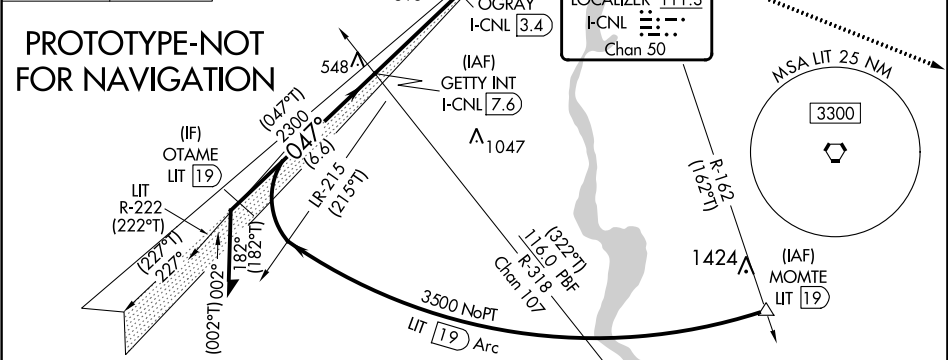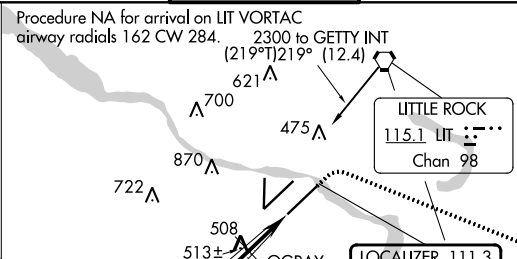

ELEV 266 TDZE 260

MIRL Rwy 18-36
HIRL Rwy 4R-22L and 4L-22R
TDZ/CL Rwy 22R

FAF to MAP 6.3 NM

Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

CATEGORY	A	B	C	D
S-ILS 4R	525/40	265 (300-¾)		
S-LOC 4R	980/40	720 (800-¾)	980-1½ 720 (800-1½)	
CIRCLING	980-1 714 (800-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)
OGRAY FIX MINIMUMS (DME REQUIRED)				
S-LOC 4R	780/40	520 (600-¾)	780/55	520 (600-1)
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)

ILS or LOC RWY 4R

LITTLE ROCK, ARKANSAS

OLD

23334


LOC/DME I-CNL 111.3 Chan 50	APP CRS 047°	Rwy Idg TDZE Apt Elev	7200 260 266
---	------------------------	-----------------------------	---

ILS or LOC RWY 4R

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

Rwy 4R helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. For inop ALS, increase S-ILS 4R all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1 3/4 SM. OGRAY Fix Minimums: For inop ALS, increase S-LOC 4R Cats A/B visibility to RVR 5500 and Cats C/D to 1 3/8 SM.	MALSR A5	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 110° and LIT VORTAC R-089 to ATERS INT/LIT 16 DME and hold.
--	---------------------	--

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
-------------------------	---	-----------------------------------	-------------------------------	---------------------------

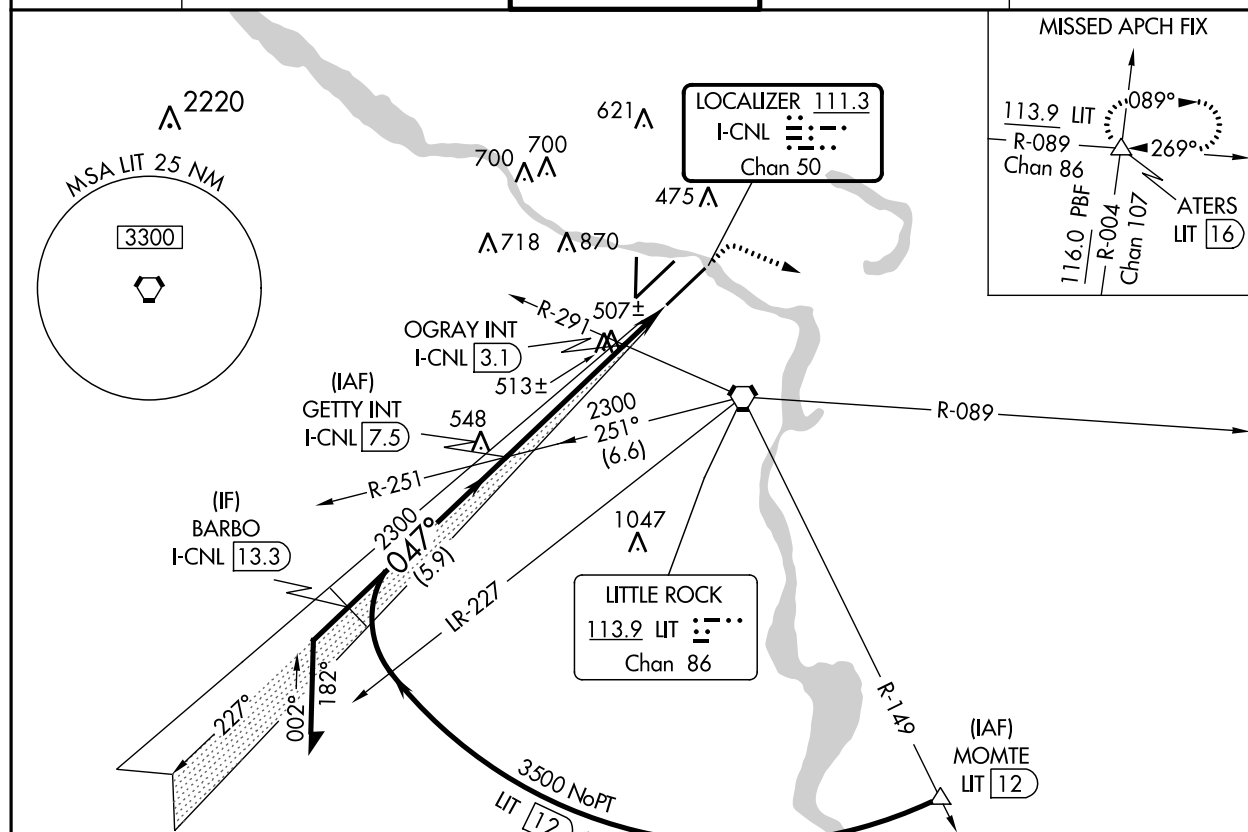

SC-1, 21 MAR 2024 to 18 APR 2024

Remain within 10 NM

GETTY INT
I-CNL 7.5

2300

GS 3.00°
TCH 49

2300

Use I-CNL DME when on the localizer course.

800

4000

hdg 110°

LIT
R-089

ATERS
△

2300

047°

2300

OGRAY INT
I-CNL 3.1

880

I-CNL 1.3

4.4 NM

1.8 NM

CATEGORY	A	B	C	D
S-ILS 4R	523/40		263 (300-¾)	
S-LOC 4R	880/40	620 (700-¾)	880-1⅜	620 (700-1⅜)
CIRCLING	880-1	1000-1	1180-2¾	1180-3
	614 (700-1)	734 (800-1)	914 (1000-2¾)	914 (1000-3)
OGRAY (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 4R	780/40 520 (600-¾)		780/55	520 (600-1)
CIRCLING	820-1	1000-1	1180-2¾	1180-3
	554 (600-1)	734 (800-1)	914 (1000-2¾)	914 (1000-3)

ELEV 266

D TDZE 260

81

6224 X 150

8273 X 150

8251 X 150

TWR 416

047°

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

MIRMIR VORTAC

FAF to MAP 6.1 NM

Knots

60 90 120 150 180

Min:Sec

6:06 4:04 3:03 2:26 2:02

LITTLE ROCK, ARKANSAS

Amdr 2G 15JUN23

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

34°44'N-92°13'W

ILS or LOC RWY 4R

