

WAAS CH 61247 W14A	APP CRS 138°	Rwy Ldg 8006 TDZE 459 Apt Elev 459
--	------------------------	---

RNAV (GPS) Y RWY 14R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


RNP APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.

ALS-1
(A1)

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct NEWAT and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
----------------------------	--	------------------------------------	-------------------------------	------------------------------------

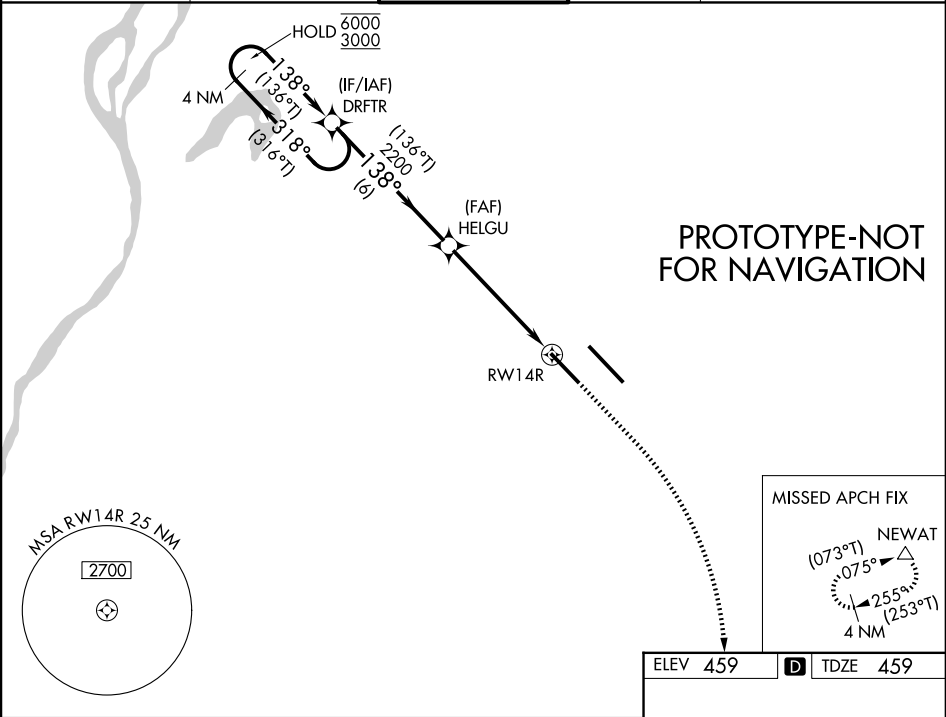

4 NM Holding Pattern DRFTR				
6000 ← 318° (316°T) → 138° (136°T) → 2200				
GP 3.00° TCH 51				
1.7 NM to RWY 14R				
6 NM 3.6 NM 1.7 NM				
CATEGORY	A	B	C	D
LPV DA*	659/24		200 (200-½)	
LNAV/VNAV DA	1035-1¼		576 (600-1¼)	
LNAV MDA	1060/24 601 (700-½)		1060-1⅜ 601 (700-1⅜)	
CIRCLING	1060-1 601 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)

