

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name PITTT (RNAV)	Number THREE	STAR Computer Code PITTT.PITTT3	Superseded Number TWO	Dated 03/19/2026	Effective Date				
TRANSITION ROUTES:									
Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	MAA	Crossing Altitudes / Fixes
BRYCE CANYON	BCE.PITTT3	BCE VORTAC	BCE VORTAC						
			SLINA	343.45	67.15	14400	14400	AT/ABOVE 17000	
			DTA VORTAC	343.36	30.00	12900	12900		
			JAMMN	003.40	45.89	12900	12900	AT 17000	
			DRAPR	003.56	16.05	12900	12900	BETWEEN 14000 AND 15000	
			SPIEK	003.61	10.95	12900	12900	BETWEEN 13000 AND 14000	
			HEIRY	003.52	04.80	11200	11200		
			PITTT	351.97	04.61	11200	11200	AT 12000	
MEEKER	EKR.PITTT3	EKR VOR/DME	EKR VOR/DME						
			RACER	262.47	44.18	12400	12400		
			MTU VOR/DME	261.86	57.31	12400	12400		
			THISL	258.48	50.03	12400	12400		
			SPANE	257.77	15.38	12400	12400	AT FL190	
			LEEHY	284.76	07.00	12400	12400		
			FFU VORTAC	284.71	13.00	11200	11200	AT 17000	
			DRYVE	319.00	10.00	11200	11200	AT/ABOVE 15000	
HELPR	HELPR.PITTT3	HELPR	PITTT	343.21	12.91	11200	11200	AT 12000	
			HELPR						
			GOSHU	285.43	36.40	12400	12400		
			SPANE	284.98	15.00	12400	12400	AT FL190	
			LEEHY	284.76	07.00	12400	12400		
			FFU VORTAC	284.71	13.00	11200	11200	AT 17000	
			DRYVE	319.00	10.00	11200	11200	AT/ABOVE 15000	
			PITTT	343.21	12.91	11200	11200	AT 12000	
MILFORD	MLF.PITTT3	MLF VORTAC	MLF VORTAC						
			BEVRR	011.70	31.27	12900	12900		
			DTA VORTAC	011.86	30.00	12900	12900		

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number			STAR Computer Code		Superseded Number			Dated	Effective Date
PITTT (RNAV)	THREE			PITTT.PITTT3		TWO			03/19/2026	
Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	MAA	Crossing Altitudes / Fixes	
			JAMMN	003.40	45.89	12900	12900		AT 17000	
			DRAPR	003.56	16.05	12900	12900		BETWEEN 14000 AND 15000	
			SPIEK	003.61	10.95	12900	12900		BETWEEN 13000 AND 14000	
			HEIRY	003.52	04.80	11200	11200			
			PITTT	351.97	04.61	11200	11200		AT 12000	
MYTON	MTU.PITTT3	MTU VOR/DME	MTU VOR/DME							
			THISL	258.48	50.03	12400	12400			
			SPANE	257.77	15.38	12400	12400		AT FL190	
			LEEHY	284.76	07.00	12400	12400			
			FFU VORTAC	284.71	13.00	11200	11200		AT 17000	
			DRYVE	319.00	10.00	11200	11200		AT/ABOVE 15000	
			PITTT	343.21	12.91	11200	11200		AT 12000	

ARRIVAL ROUTE DESCRIPTION:

LANDING RWY 16L/R, 17: FROM PITTT ON TRACK 343.95/7.06 TO MAGNE, THEN ON TRACK 343.84/1.35 TO QUIPA, THEN ON TRACK 343.86/3.30 TO CROSS LAWVA AT 11000 AND AT 210 KIAS, THEN ON TRACK 343.86. EXPECT RADAR VECTORS FOR THE RNAV (RNP) Z RWY 16R APPROACH OR RADAR VECTORS TO 16L/R, RWY 17 FINAL APPROACH COURSE.

PBN REQUIREMENT NOTES:

RNAV 1 - GPS

EQUIPMENT REQUIREMENT NOTES:

RADAR REQUIRED

PROCEDURAL DATA NOTES:

NOTE: JET AIRCRAFT ONLY

NOTE: MYTON TRANSITION, ATC ASSIGNED ONLY.

NOTE: GPS REQUIRED.

FIXES AND/OR HOLDING PATTERNS:

CHART HOLDING AT HELPR: HOLD E, RT, 285.43 INBOUND, 12 NM LEGS.

CHART HOLDING AT JAMMN: HOLD S, RT, 003.56 INBOUND, 11 NM LEGS.

CHART HOLDING AT MOINT: HOLD W, RT, 085.61 INBOUND, 7 NM LEGS.

CHART HOLDING AT MTU VOR/DME: HOLD E, RT, 261.86 INBOUND, 12 NM LEGS.

CHART HOLDING AT RACER: HOLD E, LT, 262.47 INBOUND, 16 NM LEGS.

CHART HOLDING AT SLINA: HOLD S, RT, 343.45 INBOUND, 12 NM LEGS.

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
PITTT (RNAV)	THREE	PITTT.PITTT3	TWO	03/19/2026	

CHART HOLDING AT SPANE: HOLD E, RT, 284.76 INBOUND, 10 NM LEGS.
CHART HOLDING AT BEVRR: HOLD S, RT, 011.70 INBOUND, 12 NM LEGS.
CHART: RROYY.

COMMUNICATIONS:

AIRPORTS SERVED:

<u>AIRPORT ID</u>	<u>CITY</u>	<u>STATE</u>
SLC	SALT LAKE CITY	UT

LOST COMMUNICATIONS PREFERENCES:

AFTER LAWVA PROCEED TO RROYY, THEN LEFT TURN TO MOINT AND HOLD AT 12000.

REMARKS:

CLIMB IN LOST COMM DUE TO MOUNTAINOUS TERRAIN IN AREA.
DO NOT CHART MOCA VALUES (MEAS WITHIN 500 FT.
ABBREVIATED AMDT; NO FC REQUIRED.

ADDITIONAL FLIGHT DATA:

DME/DME ASSESSMENT: UNSAT.
MAG VAR: SLC 11E/2020
CHART AT LAWVA TERMINUS: KSLC LDG RWY 16L/R, 17

FLIGHT INSPECTED BY:

ORGANIZATION: **DATE:**

PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/ VALIDATION.

Flight Inspected Signature:

Digitally signed by

ALLAN WILL

Jul 09, 2026

Digitally signed by

ALLAN WILL

Jul 09, 2026

DEVELOPED BY:

Mark Whitney

SLC ARTCC

6/12/2025

Developed By Signature:

Digitally signed by

ALLAN WILL

Jul 09, 2026

APPROVED BY:

Kyle Thompson

AJV-A400

Approved By Signature:

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
PITTT (RNAV)	THREE	PITTT.PITTT3	TWO	03/19/2026	

CHANGES:

1. ADDED A SPEED RESTRICTION OF AT 280 KIAS AT PITTT WP.
2. ADDED A SPEED RESTRICTION OF AT 210 KIAS AT LAWVA WP.
3. REMOVED ZLC ARTCC FROM COMMUNICATIONS.
4. INCREASED MOCA VALUE HEIRY-PITTT TO 11200, REFORMATTED MOCA REMARK


REASONS:

1. ATC REQUEST FOR POST-IMPLEMENTATION.
2. ATC REQUEST FOR MATCH RNAV (RNP) Z RWY 16R.
3. ATC REQUEST.
4. ATC REQUEST AND CHARTING CONSISTENCY.

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
PITTT (RNAV)	THREE	PITTT.PITTT3	TWO	03/19/2026	
Graphic Depiction 1					

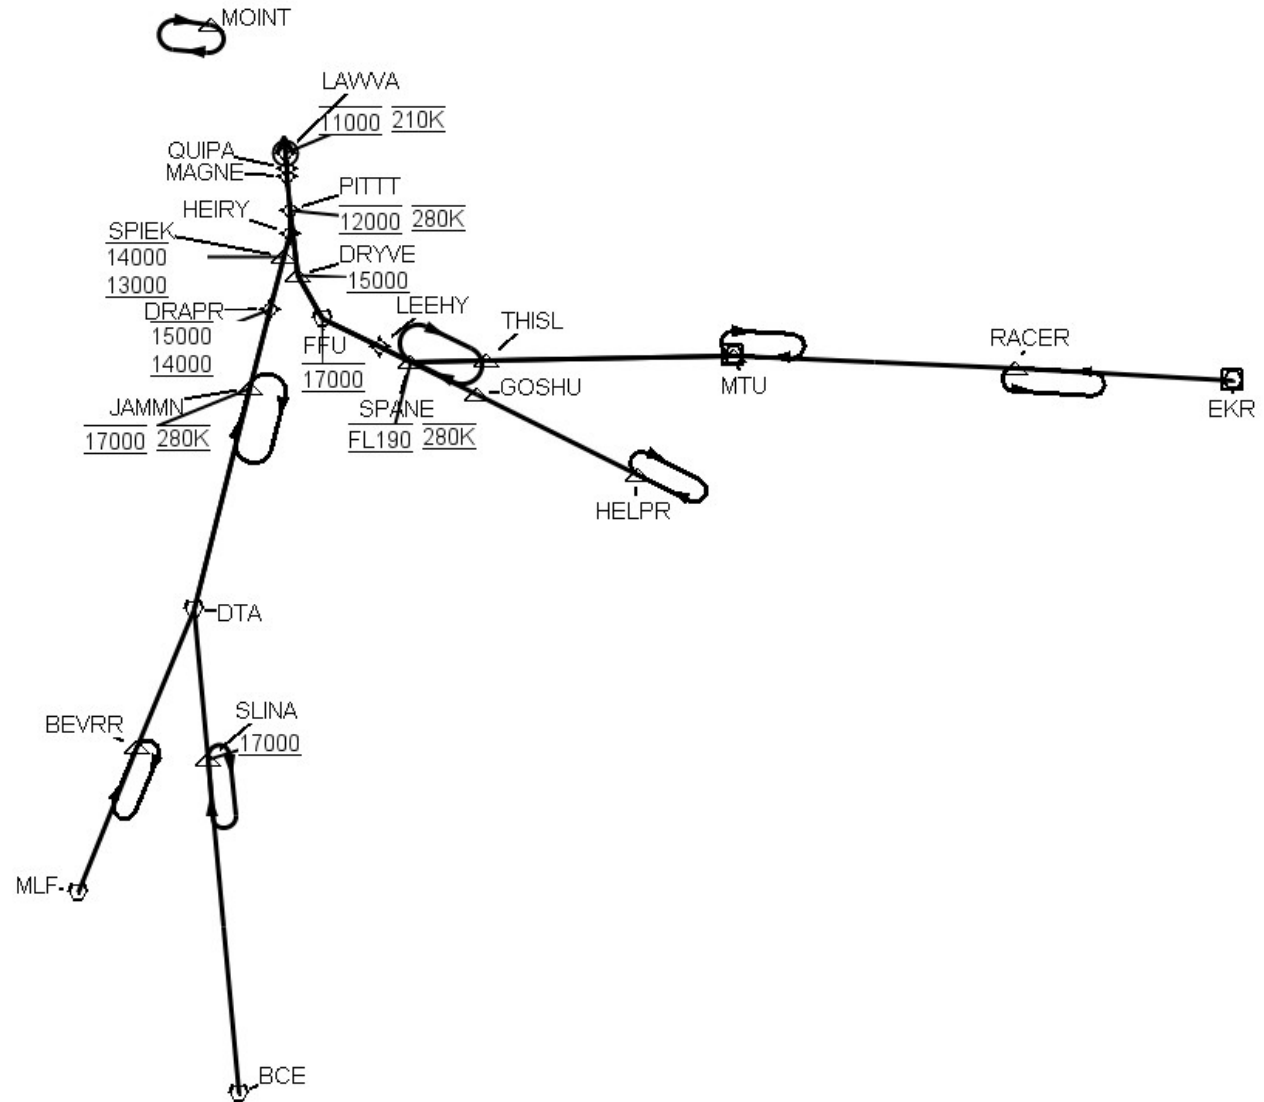

**FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)**

Arrival Name PITTT (RNAV)	Number THREE		STAR Computer Code PITTT.PITTT3		Superseded Number TWO		Dated 03/19/2026		Effective Date
<u>FIX/NAVAID</u>	<u>LAT/LONG</u>	<u>C</u>	<u>FO/FB</u>	<u>LEG TYPE</u>	<u>TC</u>	<u>DIST (NM)</u>	<u>ALTITUDE</u>	<u>SPEED</u>	<u>REMARKS</u>
En Route Transition									
BCE VORTAC	374121.07N / 1121814.05W	Y		IF					BCE.PITTT3
SLINA	384815.44N / 1122632.35W	Y	FB	TF	354.45	67.15	AT/ABOVE 17000		
DTA VORTAC	391808.14N / 1123020.01W	Y	FB	TF	354.36	30.00			
JAMMN	400236.38N / 1121528.52W	Y	FB	TF	014.40	45.89	AT 17000	AT 280K	
DRAPR	401809.15N / 1121011.96W	Y	FB	TF	014.56	16.05	14000B15000		
SPIEK	402845.17N / 1120634.90W	Y	FB	TF	014.61	10.95	13000B14000		
HEIRY	403323.98N / 1120500.20W	Y	FB	TF	014.52	04.80			
PITTT	403800.57N / 1120441.39W	Y	FB	TF	002.97	04.61	AT 12000	AT 280K	
En Route Transition									
EKR VOR/DME	400402.79N / 1075529.82W	Y		IF					EKR.PITTT3
RACER	400629.17N / 1085258.43W	Y	FB	TF	273.47	44.18			
MTU VOR/DME	400856.74N / 1100737.30W	Y	FB	TF	272.86	57.31			
THISL	400811.12N / 1111251.06W	Y	FB	TF	269.48	50.03			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	268.77	15.38	AT FL190	AT 280K	
LEEHY	401051.94N / 1114107.54W	Y	FB	TF	295.76	07.00			
FFU VORTAC	401629.62N / 1115625.91W	Y	FB	TF	295.71	13.00	AT 17000		
DRYVE	402509.42N / 1120258.70W	Y	FB	TF	330.00	10.00	AT/ABOVE 15000		
PITTT	403800.57N / 1120441.39W	Y	FB	TF	354.21	12.91	AT 12000	AT 280K	
En Route Transition									
HELPR	394511.31N / 1103253.24W	Y		IF					HELPR.PITTT3
GOSHU	400116.46N / 1111519.36W	Y	FB	TF	296.43	36.40			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	295.98	15.00	AT FL190	AT 280K	
LEEHY	401051.94N / 1114107.54W	Y	FB	TF	295.76	07.00			
FFU VORTAC	401629.62N / 1115625.91W	Y	FB	TF	295.71	13.00	AT 17000		
DRYVE	402509.42N / 1120258.70W	Y	FB	TF	330.00	10.00	AT/ABOVE 15000		
PITTT	403800.57N / 1120441.39W	Y	FB	TF	354.21	12.91	AT 12000	AT 280K	

**FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)**

Arrival Name PITTT (RNAV)	Number THREE		STAR Computer Code PITTT.PITTT3		Superseded Number TWO		Dated 03/19/2026		Effective Date
<u>FIX/NAVAID</u>	<u>LAT/LONG</u>	<u>C</u>	<u>FO/FB</u>	<u>LEG TYPE</u>	<u>TC</u>	<u>DIST (NM)</u>	<u>ALTITUDE</u>	<u>SPEED</u>	<u>REMARKS</u>
En Route Transition									
MLF VORTAC	382137.28N / 1130047.64W	Y		IF					MLF.PITTT3
BEVRR	385029.15N / 1124520.83W	Y	FB	TF	022.70	31.27			
DTA VORTAC	391808.14N / 1123020.01W	Y	FB	TF	022.86	30.00			
JAMMN	400236.38N / 1121528.52W	Y	FB	TF	014.40	45.89	AT 17000	AT 280K	
DRAPR	401809.15N / 1121011.96W	Y	FB	TF	014.56	16.05	14000B15000		
SPIEK	402845.17N / 1120634.90W	Y	FB	TF	014.61	10.95	13000B14000		
HEIRY	403323.98N / 1120500.20W	Y	FB	TF	014.52	04.80			
PITTT	403800.57N / 1120441.39W	Y	FB	TF	002.97	04.61	AT 12000	AT 280K	
En Route Transition									
MTU VOR/DME	400856.74N / 1100737.30W	Y		IF					MTU.PITTT3
THISL	400811.12N / 1111251.06W	Y	FB	TF	269.48	50.03			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	268.77	15.38	AT FL190	AT 280K	
LEEHY	401051.94N / 1114107.54W	Y	FB	TF	295.76	07.00			
FFU VORTAC	401629.62N / 1115625.91W	Y	FB	TF	295.71	13.00	AT 17000		
DRYVE	402509.42N / 1120258.70W	Y	FB	TF	330.00	10.00	AT/ABOVE 15000		
PITTT	403800.57N / 1120441.39W	Y	FB	TF	354.21	12.91	AT 12000	AT 280K	
Runway Transition									
PITTT	403800.57N / 1120441.39W	Y		IF			AT 12000	AT 280K	
MAGNE	404502.61N / 1120530.47W	Y	FB	TF	354.95	07.06			
QUIPA	404623.36N / 1120540.06W	Y	FB	TF	354.84	01.35			
LAWVA	404940.43N / 1120603.40W	Y	FO	TF	354.86	03.30	AT 11000	AT 210K	
KSLC:RWY 16L,RWY 16R,RWY 17				FM	354.86				

