

WAAS CH 53609 W26A	APP CRS 259°	Rwy Ldg TDZE Apt Elev	7815 548 565
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

RNP APCH - GPS.


Baro-VNAV and VDP NA when using HGR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

When local altimeter setting not received, use HGR altimeter setting: increase LPV DA to 868 feet; increase LNAV/VNAV DA to 1283 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cts C/D/E ¼ SM, and Circling visibility Cts C/D ¼ SM. For inop ALS, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E to 2¼, and LNAV Cat E to 1½. For inop ALS when using HGR altimeter setting, increase LPV all Cts visibility to 1, LNAV/VNAV Cat E visibility to 2½, and LNAV Cat E visibility to 1¾.

MALSR

MISSED APPROACH:
Climb to 4100 direct JOSRU and hold, continue climb-in-hold to 4100.

ASOS 119.925	POTOMAC APP CON 126.825 239.025	MARTINSBURG TOWER ★ 124.3 (CTAF) 233.7	GND CON 121.8 257.65	CLNC DEL 121.8 257.65	CLNC DEL 132.075 269.075 (When twr closed)
------------------------	---	---	--------------------------------	---------------------------------	---

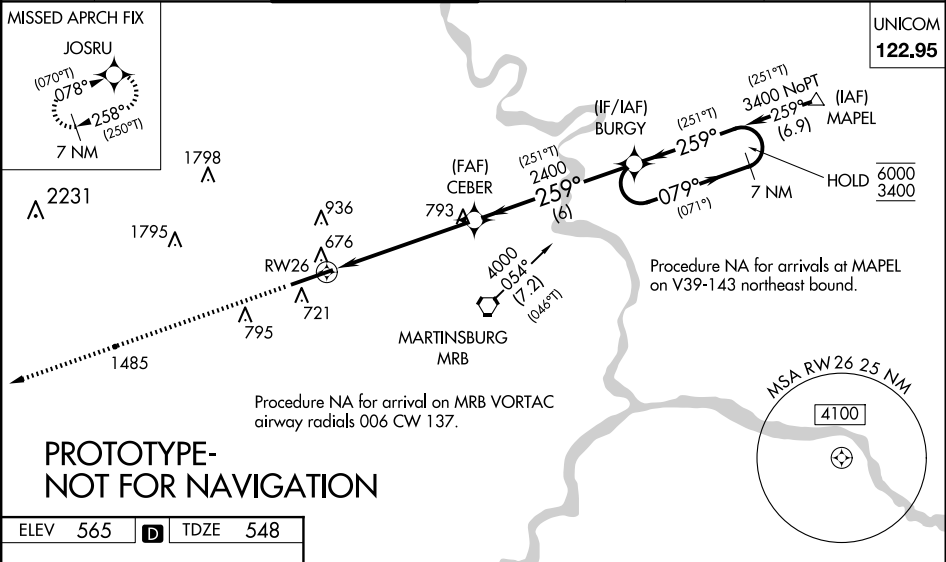

ELEV 565	D	TDZE 548
-----------------	----------	-----------------

