
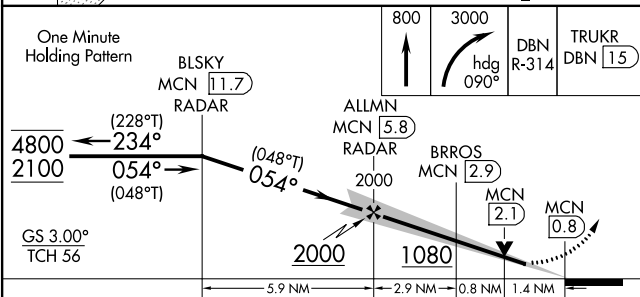


LOC I-MCN 109.5	APP CRS 054°	Rwy Ldg TDZE Apt Elev 6501 345 355
---------------------------	------------------------	--

ILS or LOC RWY 5
MIDDLE GEORGIA RGNL (MCN)

DME or RADAR required.		MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 090° and DBN VORTAC R-314 to TRUKR/DBN VORTAC 1.5 DME/RADAR and hold.
DME from MCN DME. Simultaneous reception of I-MCN and MCN DME required. For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000 and S-LOC 5 Cats C, D, and E visibilities to 1 1/2 SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.775	ATLANTA APP CON * 124.2 279.6	MACON TOWER * 128.2 (CTAF) 0 257.8	GND CON 121.65	UNICOM 122.95
------------------------	---	--	--------------------------	-------------------------

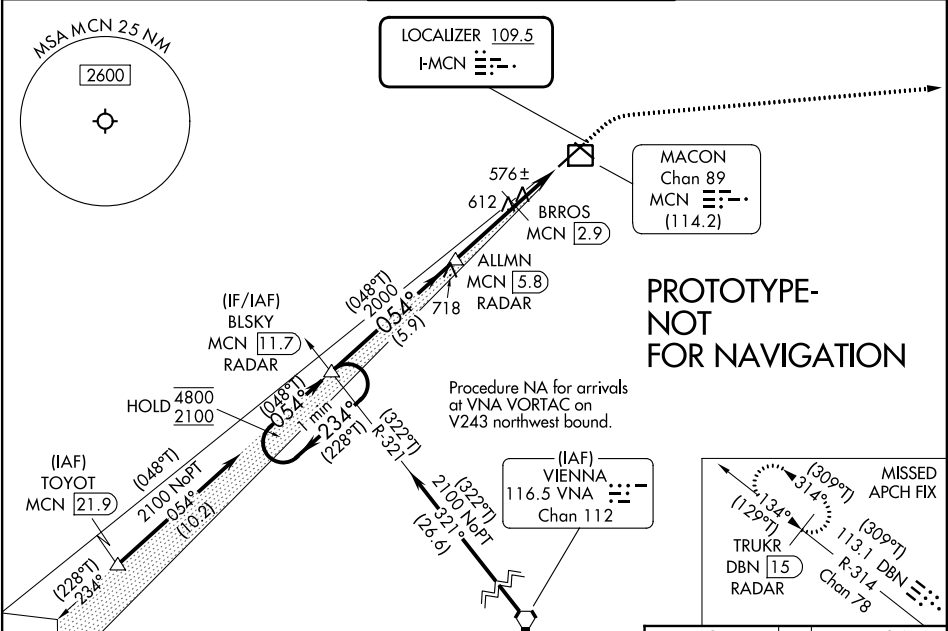

CATEGORY	A	B	C	D	E
S-ILS 5 *	545/24 200 (200-1/2)				
S-LOC 5	1080/24	735 (800-1/2)	1080-1 1/8	735 (800-1 1/8)	
CIRCLING	1080-1	725 (800-1)	1080-2 725 (800-2)	1120-2 1/2 765 (800-2 1/2)	1180-3 825 (900-3)
BRROS FIX MINIMUMS					
S-LOC 5	840/24	495 (500-1/2)	840/50	495 (500-1)	
CIRCLING	900-1	545 (600-1)	980-1 3/4 625 (700-1 3/4)	1120-2 1/2 765 (800-2 1/2)	1180-3 825 (900-3)

