

WAAS CH XXXX XXX	APP CRS 034°	Rwy Idg 8107 TDZE 4473 APT Elev 4473
------------------------	---------------------	--


RNAV (GPS) RWY 3

OGDEN-HINCKLEY (KOGD)

RNP APCH - GPS.			MALS	MISSED APPROACH: CLIMB TO 5000 THEN CLIMBING LEFT TURN TO 9000 DIRECT MOINT AND HOLD, CONTINUE CLIMB-IN-HOLD TO 9000.
FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -13°C OR ABOVE 54°C. RWY 3 HELICOPTER VISIBILITY REDUCTION BELOW 3/4 SM NOT AUTHORIZED. CIRCLING NA FOR CATS C AND D SE OF RWY 21 AND E OF RWY 35. FOR INOPERATIVE ALS, INCREASE LPV ALL CATS VISIBILITY TO 7/8 SM, INCREASE LNAV/VNAV ALL CATS AND LNAV CAT C/D VISIBILITY TO 1 1/8 SM.			A4	

ATIS 125.55	SALT LAKE CITY APP CON 121.1	OGDEN TOWER★ 118.7 (CTAF) 253.5	GND CON 121.7	UNICOM 122.95
----------------	---------------------------------	------------------------------------	------------------	------------------

PROTOTYPE-NOT FOR NAVIGATION

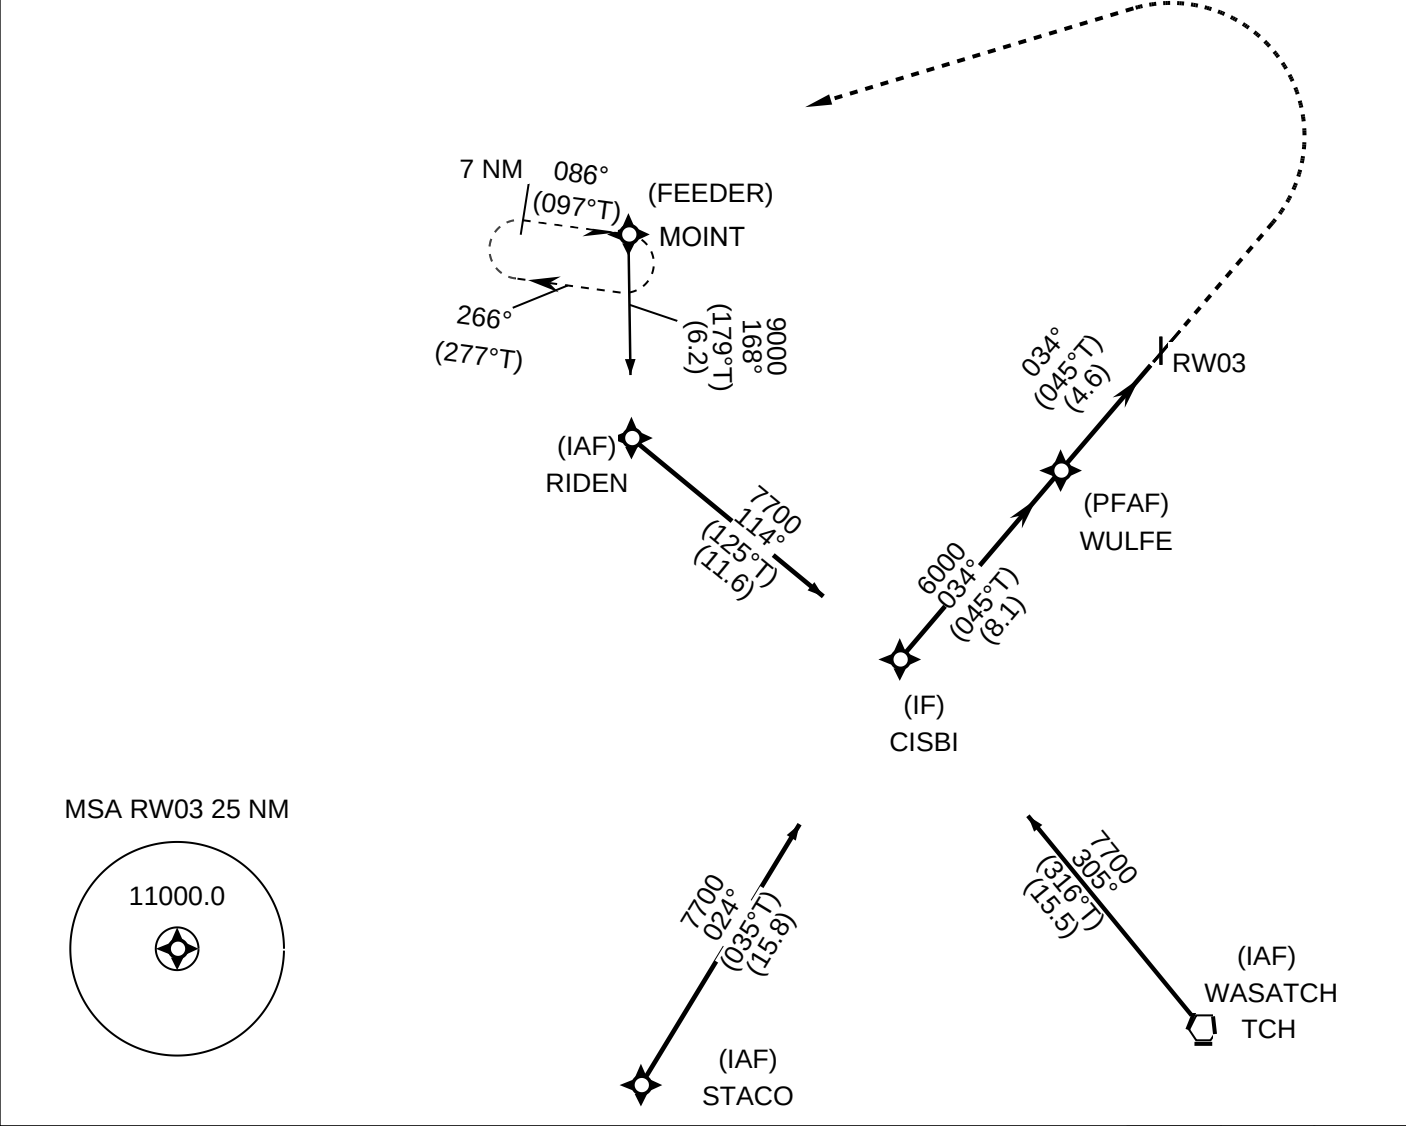

CISBI WULFE 1.1 NM to RW03 034° (045°T) 6000 8.1 NM 3.5 NM 1.1 NM GS 3.00° TCH 49 5000 9000 MOINT						
CATEGORY	A			B	C	D
LPV	4747-3/4 274					
LNAV/VNAV	4889-1 416					
LNAV	4880-3/4 407			4880-1 407		
CIRCLING	5000-1 527		5100-1 627		5180-2 1/4 707	