WAAS CH XXXX XXX	APP CRS 173°	Rwy ldg 5507 TDZE 1553 APT Elev 1563

RNAV (GPS) RWY 17

HOBART RGNL (KHBR)

RNP APCH - GPS

FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -16°C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING AXS ALTIMETER SETTING. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE AXS ALTIMETER SETTING AND INCREASE LPV DA TO 1874 FEET AND ALL VISIBILITIES 1/4SM; INCREASE LNAV/VNAV DA TO 1971 FEET AND ALL VISIBILITIES 1/8 SM; INCREASE ALL MDAS 80 FEET AND LNAV VISIBILITY) CAT C AND D 1/4 SM, AND CIRCLING VISIBILITY CAT C 1/4 SM.

MISSED APPROACH:CLIMB TO 4000 DIRECT DOMLE AND HOLD.

PROTOTYPE-NOT FOR NAVIGATION

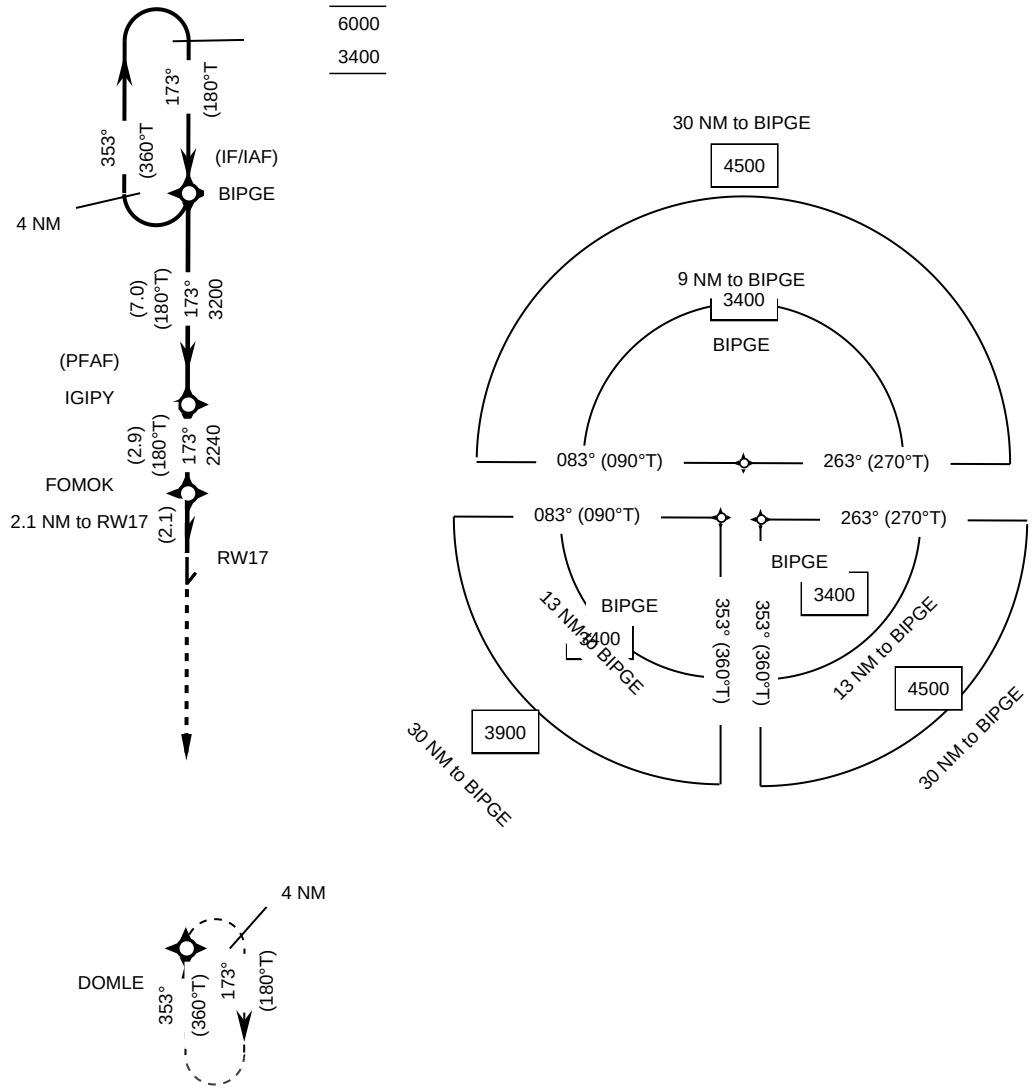

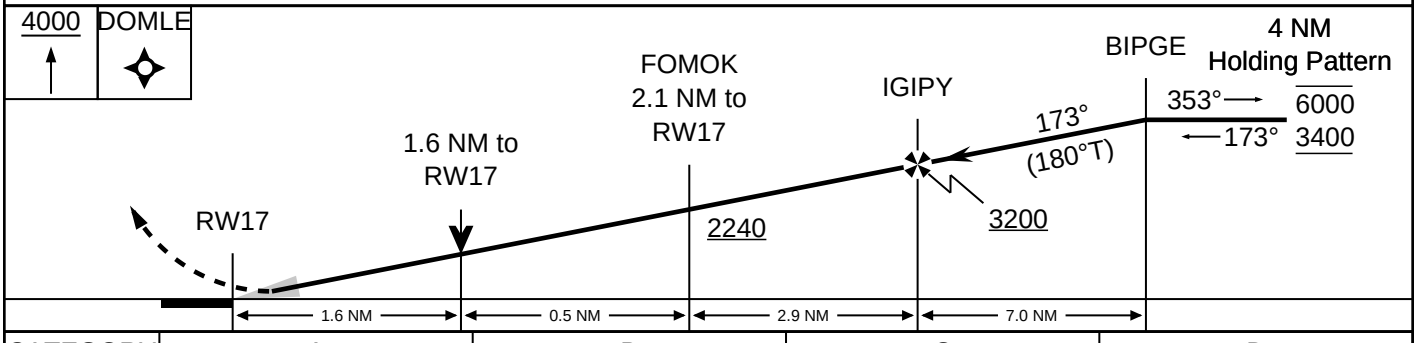

CATEGORY	A	B	C	D
LPV	1803-3/4 250			
LNAV/VNAV	1900-1 347			
LNAV	2080-1 527		2080-1 1/2 527	
CIRCLING	2080-1 517		2320-2 1/4 757	2460-3 897