

WAAS	APP CRS	Rwy Ldg	5003
CH 42607	004°	TDZE	36
W36A		Apt Elev	39

RNAV (GPS) RWY 36
FALSE RIVER RGNL (HZR)



RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
Baro-VNAV and VDP NA when using BTR altimeter setting. When local altimeter setting not received, use BTR altimeter setting: increase LPV DA to 337 feet; increase LNAV/VNAV DA to 463 feet and all visibilities 1/8 SM; increase all MDAs 60 feet and LNAV visibility Cats C and D 1/8 SM, and Circling visibility Cat C 1/4 SM. For inop ALS when using BTR altimeter setting, increase LNAV visibility Cats C and D to 1 1/8 SM.

ODALS

MISSED APPROACH:
Climb to 2300 direct
FENPU and hold.

AWOS-3PT 121.250	BATON ROUGE APP CON★ 120.3 278.3	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	--------------------------

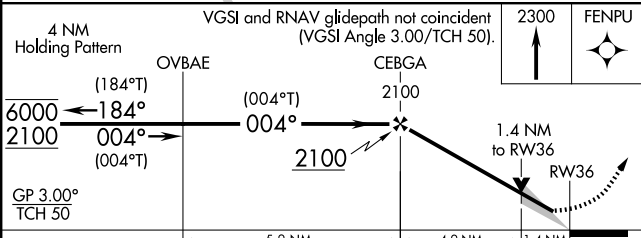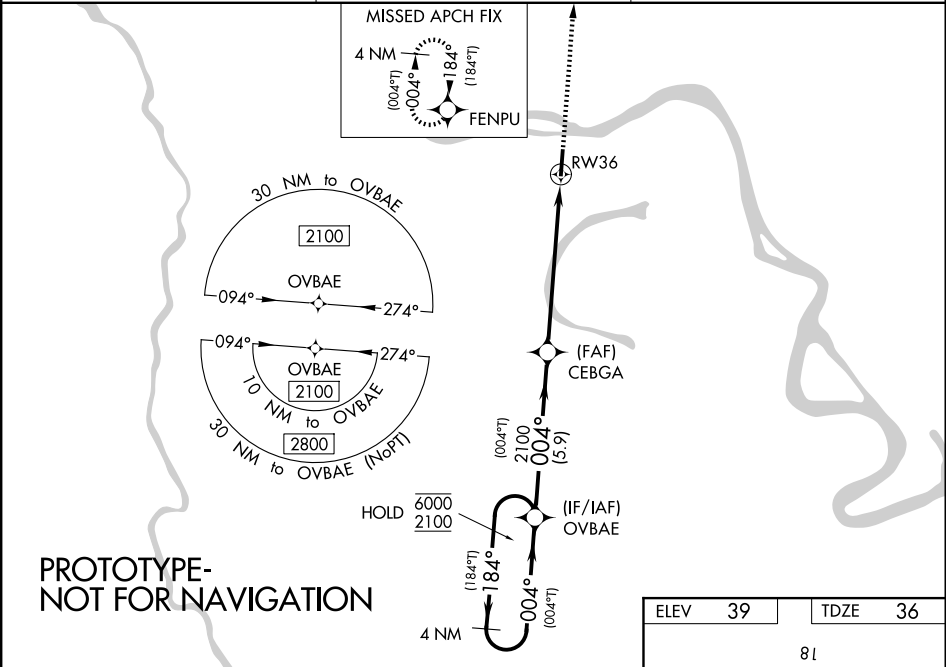

CATEGORY	A	B	C	D
LPV DA		286-3/4	250 (300-3/4)	
LNAV/VNAV DA		412-1	376 (400-1)	
LNAV MDA	520-3/4	484 (500-3/4)	520-1 1/4	484 (500-1 1/4)
CIRCLING	520-1	481 (600-1)	600-1 1/2 561 (600-1 1/2)	600-2 561 (600-2)

