


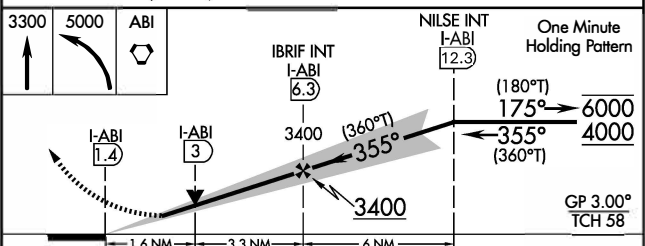
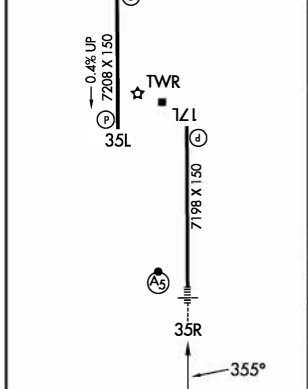
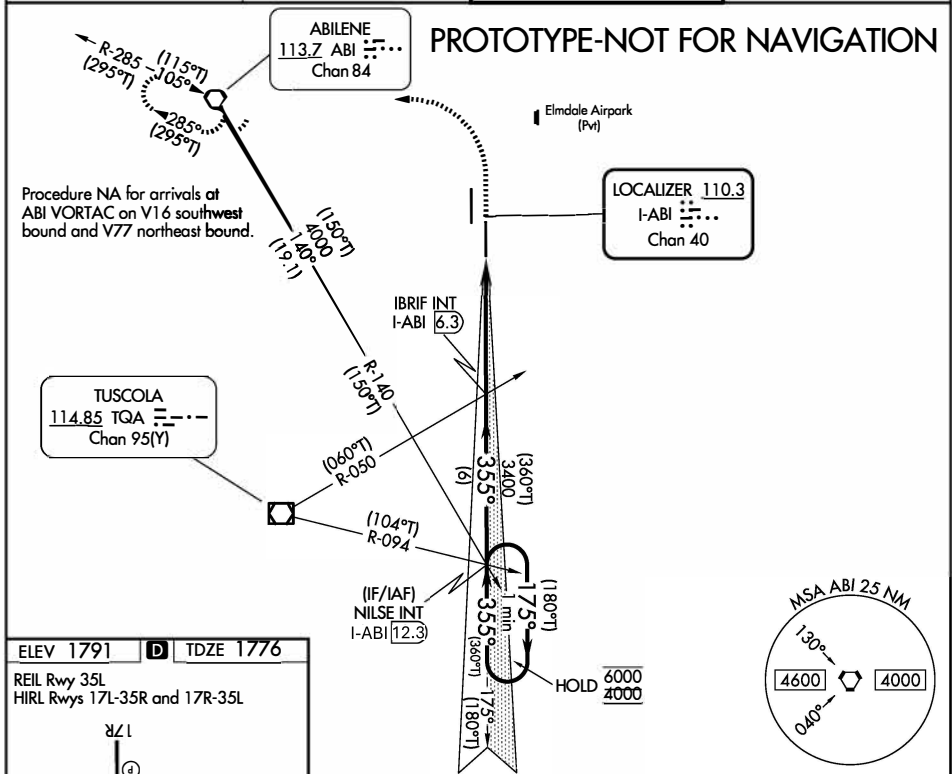
LOC/DME I-ABI 110.3 Chan 40	APP CRS 355°	Rwy Ldg 7198 TDZE 1776 Apt Elev 1791
--	------------------------	--

ILS or LOC RWY 35R

ABILENE RGNL (ABI)

<p>⚠ WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE DYS ALTIMETER SETTING AND INCREASE S-ILS 35R DA TO 1997 FEET; INCREASE ALL MDA/S 40 FEET AND S-LOC 35R VISIBILITY CAT C/D/E 1/8 SM, AND CIRCLING VISIBILITY CAT D 1/4 SM. VDP NA WHEN USING DYS ALTIMETER SETTING. FOR INOPERATIVE ALS, INCREASE S-ILS 35R CAT E VISIBILITY TO RVR 4000, AND S-LOC 35R CAT C/D/E VISIBILITY TO 1 3/8 SM. *RVR 1800 NA WHEN USING DYS ALTIMETER SETTING. * RVR 1800 AUTHORIZED WITH USE OF FD OR AP OR HUD TO DA.</p>	<p>MALSR </p>	<p>MISSED APPROACH: Climb to 3300 then climbing left turn to 5000 direct ABI VORTAC and hold, continue climb-in-hold to 5000.</p>
--	---	---

<p>ATIS 118.25</p>	<p>ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)</p>	<p>ABILENE TOWER 120.1 257.8</p>	<p>GND CON 121.7 348.6</p>
-------------------------------	--	---	---------------------------------------



CATEGORY	A	B	C	D	E
S-ILS 35R ★	1976/24 200 (200-½)				
S-LOC 35R	2360/24	584 (600-½)	2360-1¼	584 (600-1¼)	
CIRCLING	2360-1	569 (600-1)	2420-1¾ 629 (700-1¾)	2460-2 669 (700-2)	2620-3 829 (900-3)