

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 10/02/2025	APWS Task ID: D9009206B8B241048FAA1874356F5DA7	APWS Project ID: 3C81EC5B35694B048CB47E87D0ED8B65
Procedure: RNAV (GPS) Y RWY 2R AMDT 3		Enroute: YES	Specialist: Hardison, Dustin		Agreement Number:
Airport ID: KBNA			Airport City: NASHVILLE		State: TN
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: DEVELOPED WITH ACTIVE DATA. TCH CHANGED FROM 59 TO 54.9 OVERLAY THE ILS OR LOC RWY 2R. Contact Rake McGraw AJV-A422 (405)597-8711 QUALITY 38 CHECKED QUALITY 29 CHECKED					

WAAS CH 93713 W02D	APP CRS 021°	Rwy Ldg TDZE Apt Elev	8000 590 599
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 2R

NASHVILLE INTL (BNA)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS increase LNAV/VNAV visibility all Cnts to RVR 5500.


ALS F-2

Ⓐ

Ⓜ

MISSED APPROACH: Climb to 1300, then climbing right turn to 4000 direct LENON and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
------------------------	---	---------------------------------------	-------------------------------	---------------------------	-------

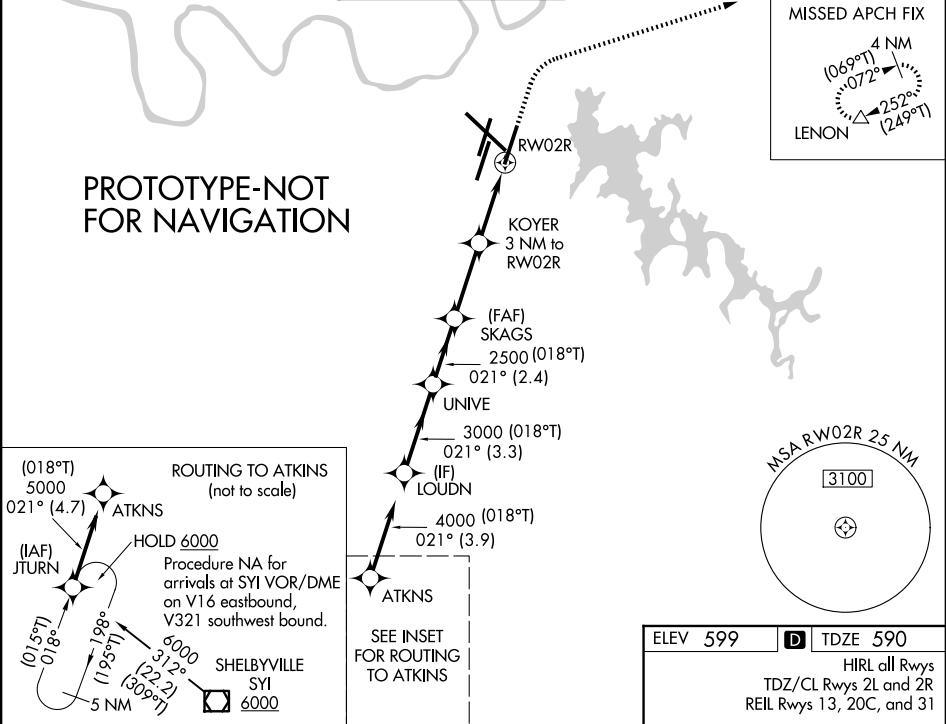

WAAS CH 93713 W02D	APP CRS 021°	Rwy Idg TDZE Apt Elev	8000 590 599
--	------------------------	-----------------------------	---

OLD

RNAV (GPS) Y RWY 2R

NASHVILLE INTL (BNA)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized with Rwy 2L/C. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALSF-2 increase LNAV/VNAV visibility all Cats to RVR 5400.


ALSF-2

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct LENON and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
------------------------	---	---------------------------------------	-------------------------------	---------------------------	-------

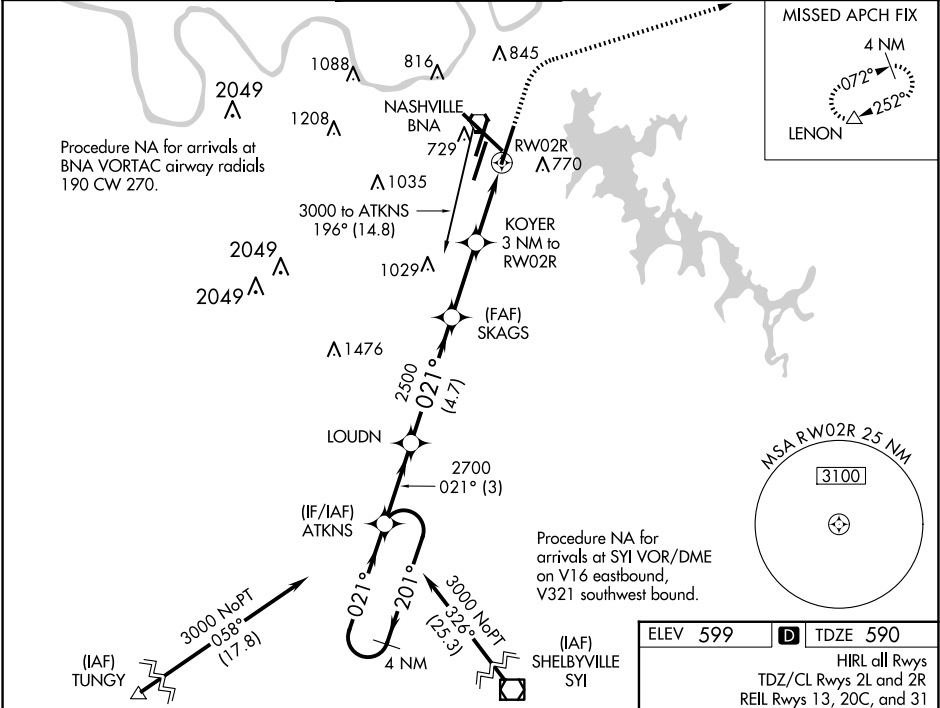

4 NM Holding Pattern		ATKNS	LOUDN	SKAGS	KOYER 3 NM to RW02R	*1.1 NM to RW02R	RW02R
3000		201°	021°	2500	2500	1600	
GP 3.00°		TCH 59					
3 NM		4.7 NM	2.8	1.9	1.1		
CATEGORY	A	B	C	D			
LPV DA		790/18	200 (200-½)				
LNAV/VNAV DA		928/30	338 (400-¾)				
LNAV MDA	1020/24	430 (500-½)	1020/40	430 (500-¾)			
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)			

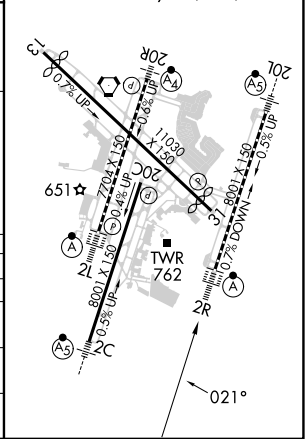

2000000

[illegible]


FT
IN

20000

40000

500000

KBNA, NASHVILLE INTL, NASHVILLE, TN
RNAV (GPS) Y RWY 2R, AMDT 3
LPV FINAL
1:100,000

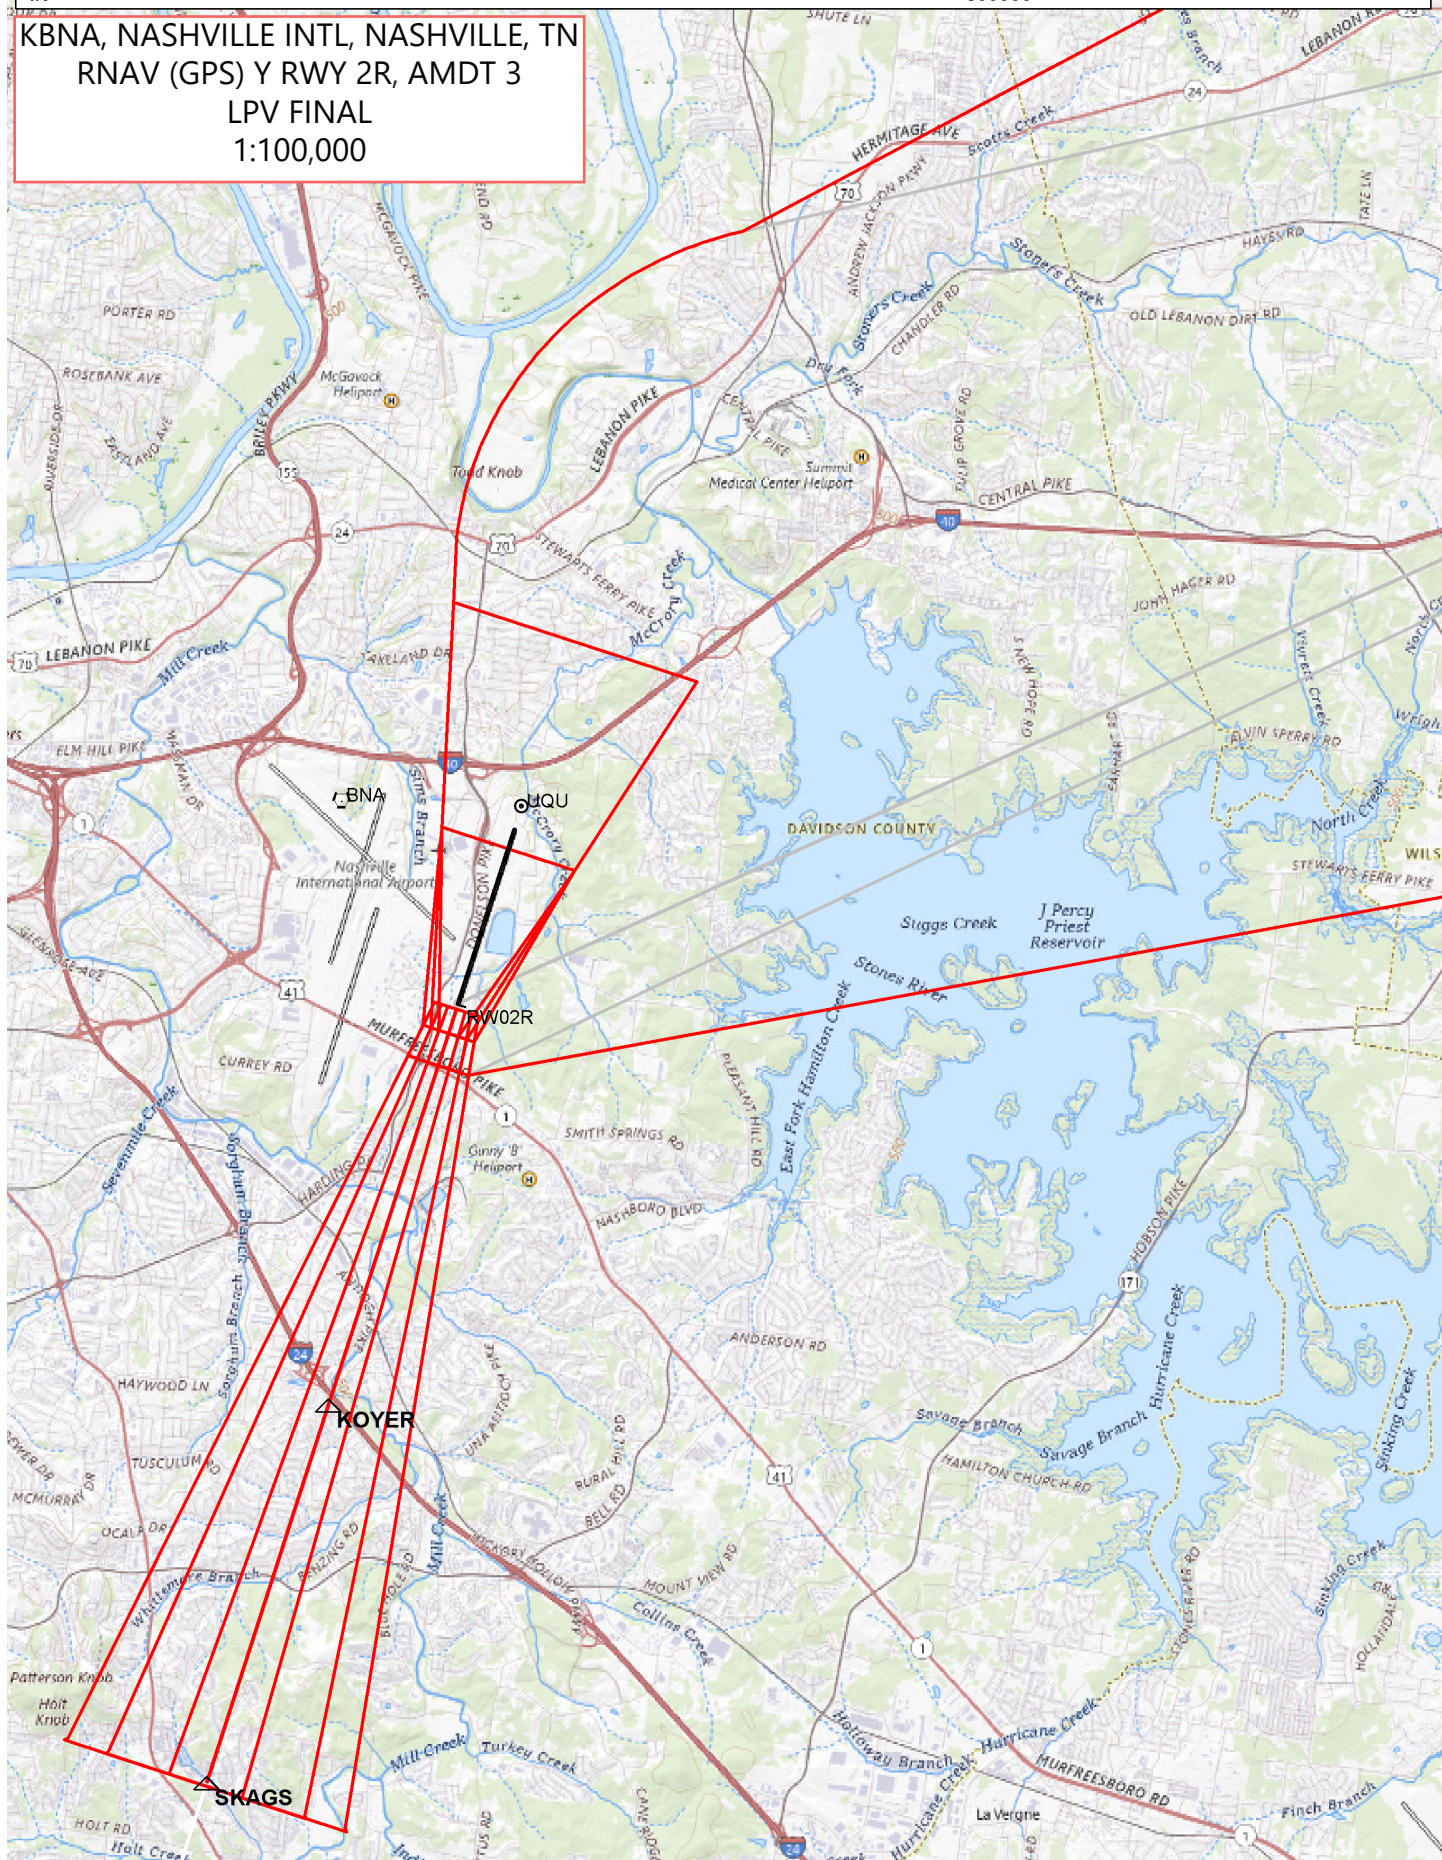


FT
IN

20000

40000

500000

KBNA, NASHVILLE INTL, NASHVILLE, TN
RNAV (GPS) Y RWY 2R, AMDT 3
LNAV/VNAV FINAL
1:100,000

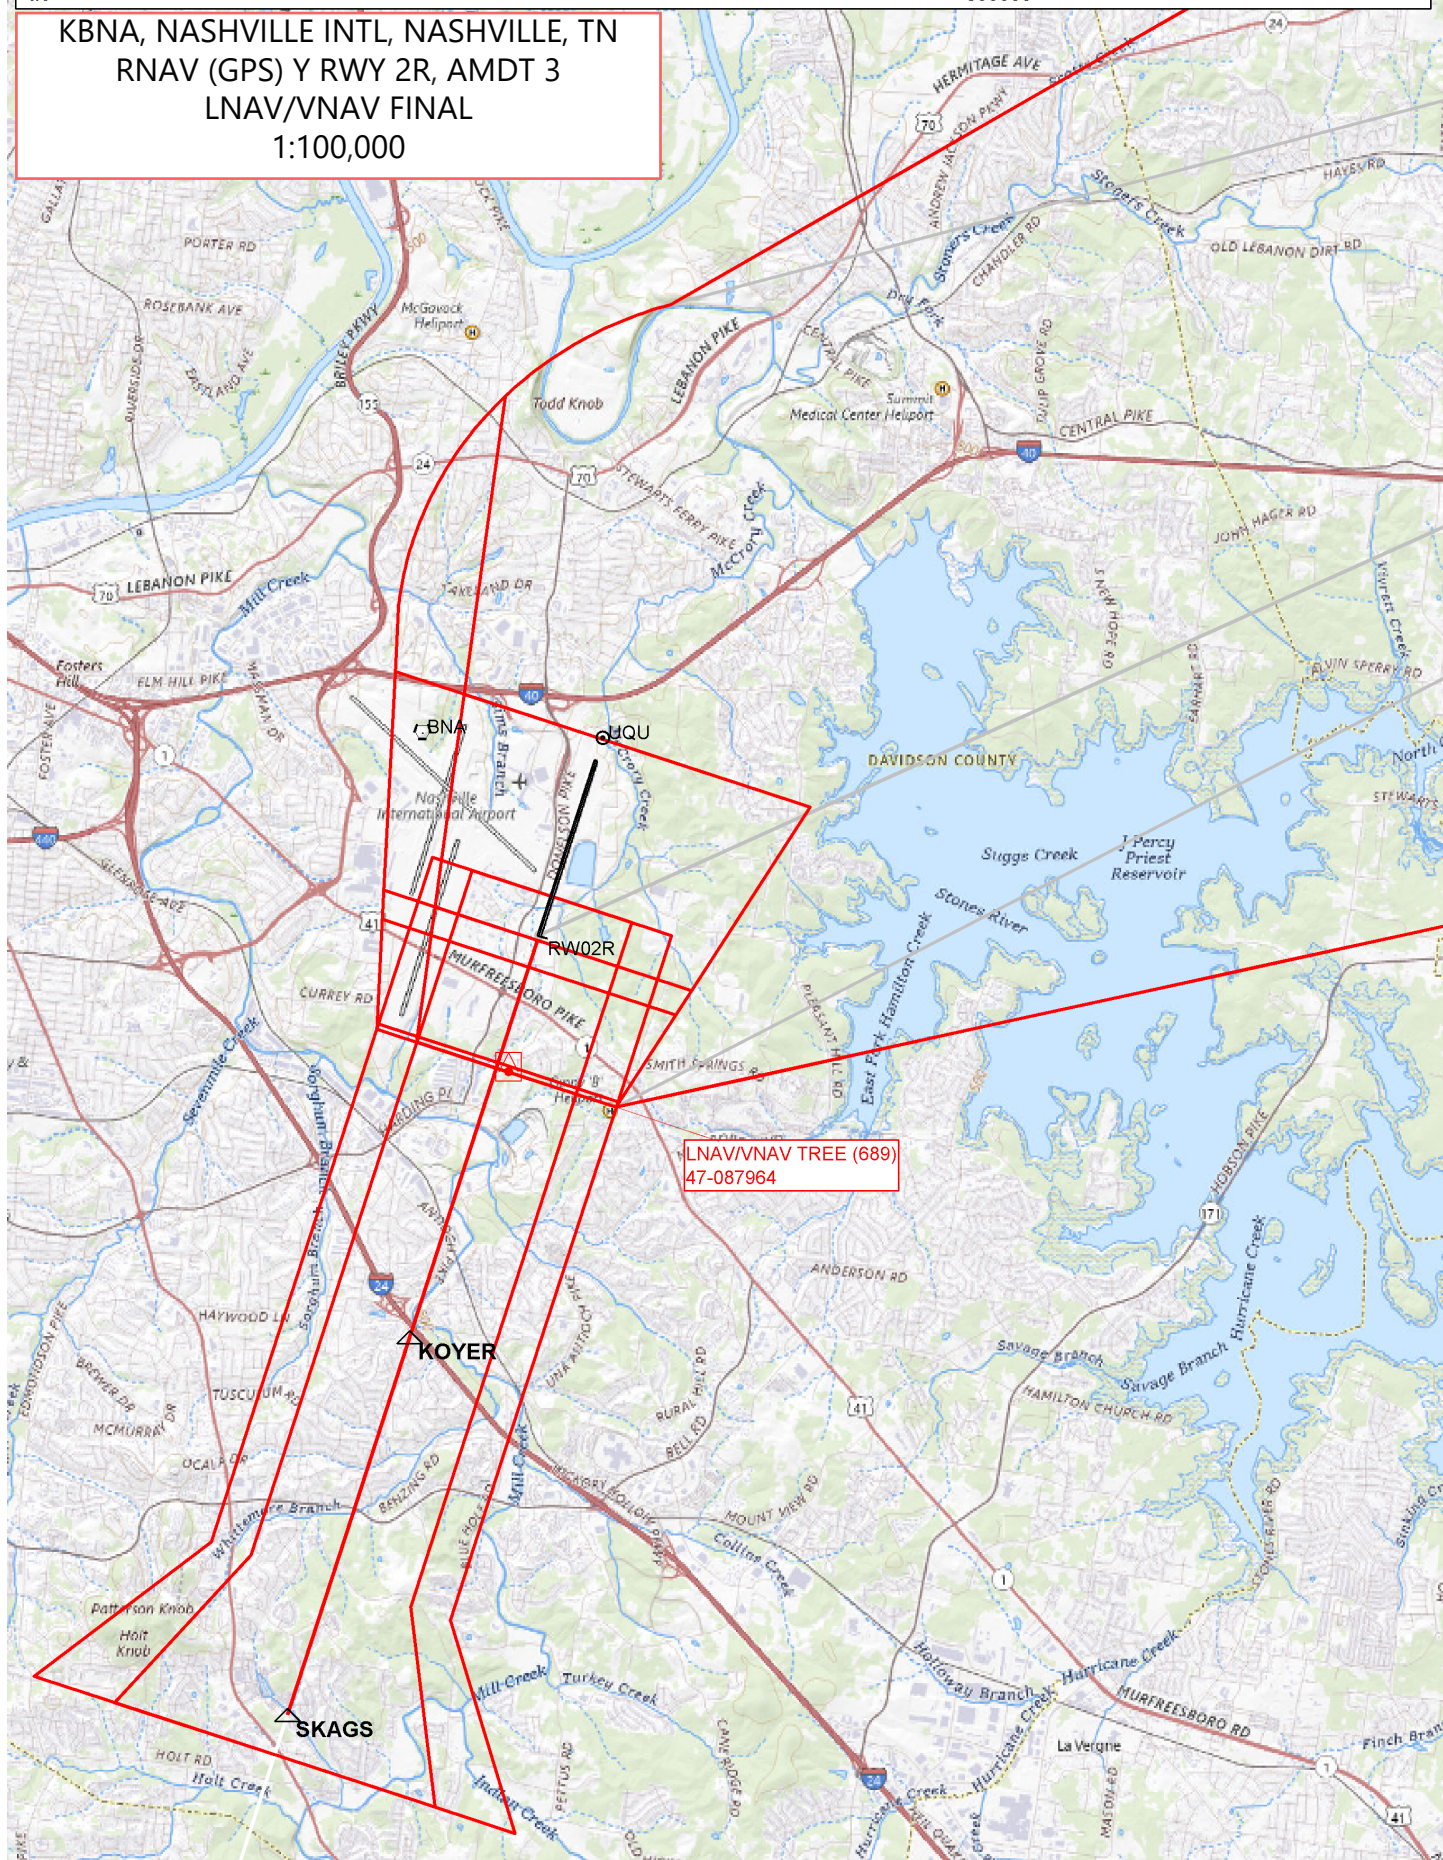

FT
IN

20000

40000

500000

KBNA, NASHVILLE INTL, NASHVILLE, TN
RNAV (GPS) Y RWY 2R, AMDT 3
LNAV FINAL
1:100,000

