

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 02/20/2025	APWS Task ID: DB784BE787B64EDC8BDFA1F2D69192BE	APWS Project ID: 36E4C7365EA64C398317DCCBE9EDBB8C
Procedure: RNAV (GPS) RWY 5 AMDT 1A		Enroute: NO	Specialist: Marsh, Andre		Agreement Number:
Airport ID: 210			Airport City: MADISONVILLE		State: KY
Facility ID:	Facility Type:	Flight Inspection Remark Type: Hold FC Slot			
Procedure Comments: REQUEST TABLETOP EVALUATION. DAVID DANNER, AJV-A420: 405-954-5077 QUALITY 9 CHECKED BEGUE QUALITY 18 CHECKED					



WAAS CH 82512 W05A	APP CRS 054°	Rwy Idg TDZE Apt Elev	6051 439 439
--------------------------	-----------------	-----------------------------	--------------------

RNAV (GPS) RWY 5


MADISONVILLE RGNL (2I0)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2600 direct LOREE and hold.
▼ ▲	Baro-VNAV and VP NA when using EVV altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensate Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use EVV altimeter setting and increase all LPV DA to 788 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 818 feet on all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.			
AWOS-3 126.475	EVANSVILLE APP CON ★ 124.025 290.9	CLNC DEL 120.1	UNICOM 122.7 (CTAF) 0	

PROTOTYPE-NOT FOR NAVIGATION

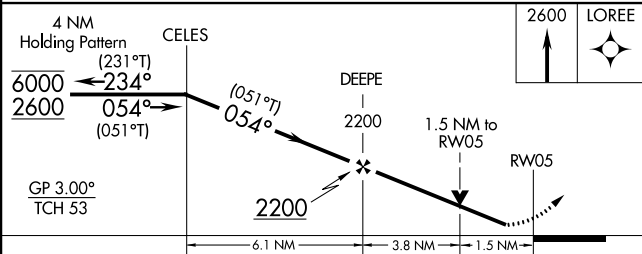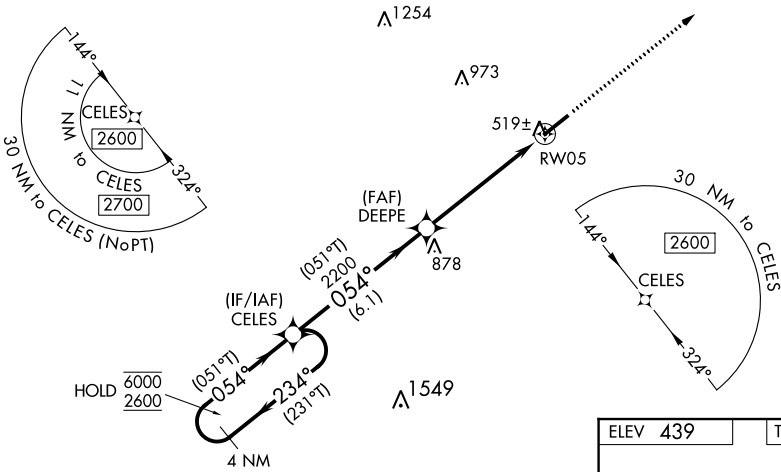

CATEGORY	A	B	C	D
LPV DA	689-¾		250 (300-¾)	
LNAV/VNAV DA	719-7/8		280 (300-7/8)	
LNAV MDA	980-1 541 (600-1)		980-1½ 541 (600-1½)	
CIRCLING	980-1 541 (600-1)		980-1½ 541 (600-1½) 1340-3 901 (1000-3)	

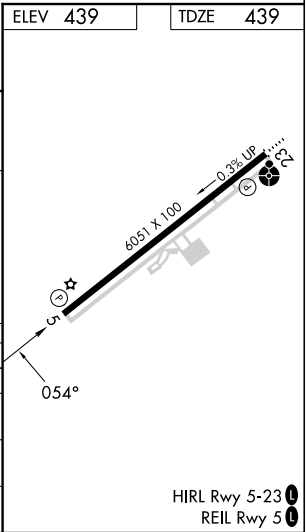

WAAS CH 82512 W05A	APP CRS 054°	Rwy Idg TDZE 439 Apt Elev 439	6051
--	------------------------	---	-------------


OLD

RNAV (GPS) RWY 5
MADISONVILLE RGNL (2I0)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Evansville altimeter setting. Rwy 05 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Evansville altimeter setting and increase LPV DA to 788 feet, LNAV/VNAV DA to 817 feet and all visibilities ¾ SM. Increase all MDA 100 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 2600 direct LOREE and hold.


AWOS-3 126.475	EVANSVILLE APP CON ★ 124.025 290.9	CLNC DEL 120.1	UNICOM 122.7 (CTAF) 0
--------------------------	--	--------------------------	---------------------------------

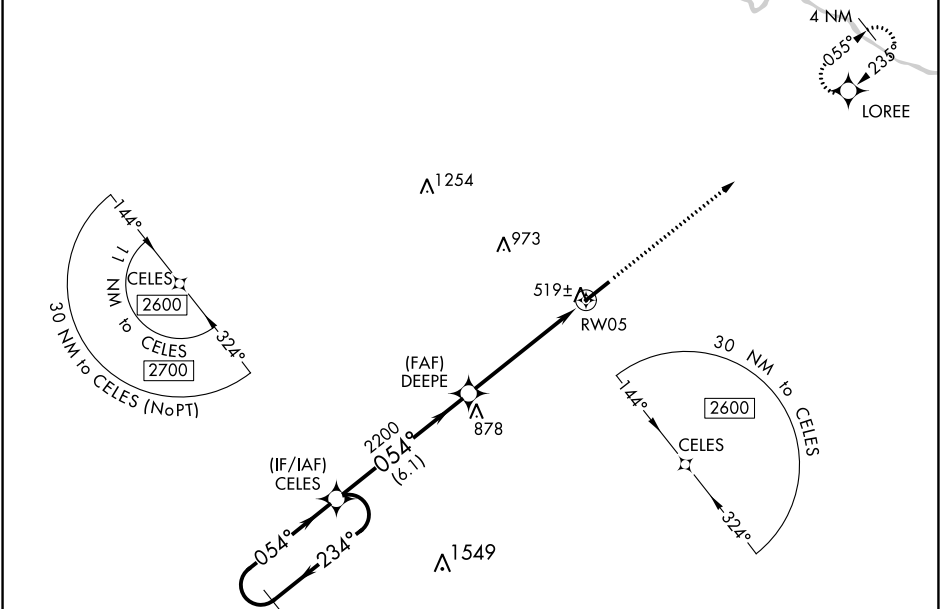

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).		2600 LOREE	
2600 ←234° 054°→		DEEPE 2200		*LNAV only.	
GP 3.00° TCH 53		*1.5 NM to RWY 05		RWY 05	
6.1 NM		3.9 NM		1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	689-¾		250 (300-¾)		
LNAV/VNAV DA	718-⅞		279 (300-⅞)		
LNAV MDA	960-1	521 (600-1)	960-1½	521 (600-1½)	
CIRCLING	960-1	521 (600-1)	960-1½ 521 (600-1½)	1340-3 901 (1000-3)	

SE-1, 08 AUG 2024 to 05 SEP 2024

SE-1, 08 AUG 2024 to 05 SEP 2024

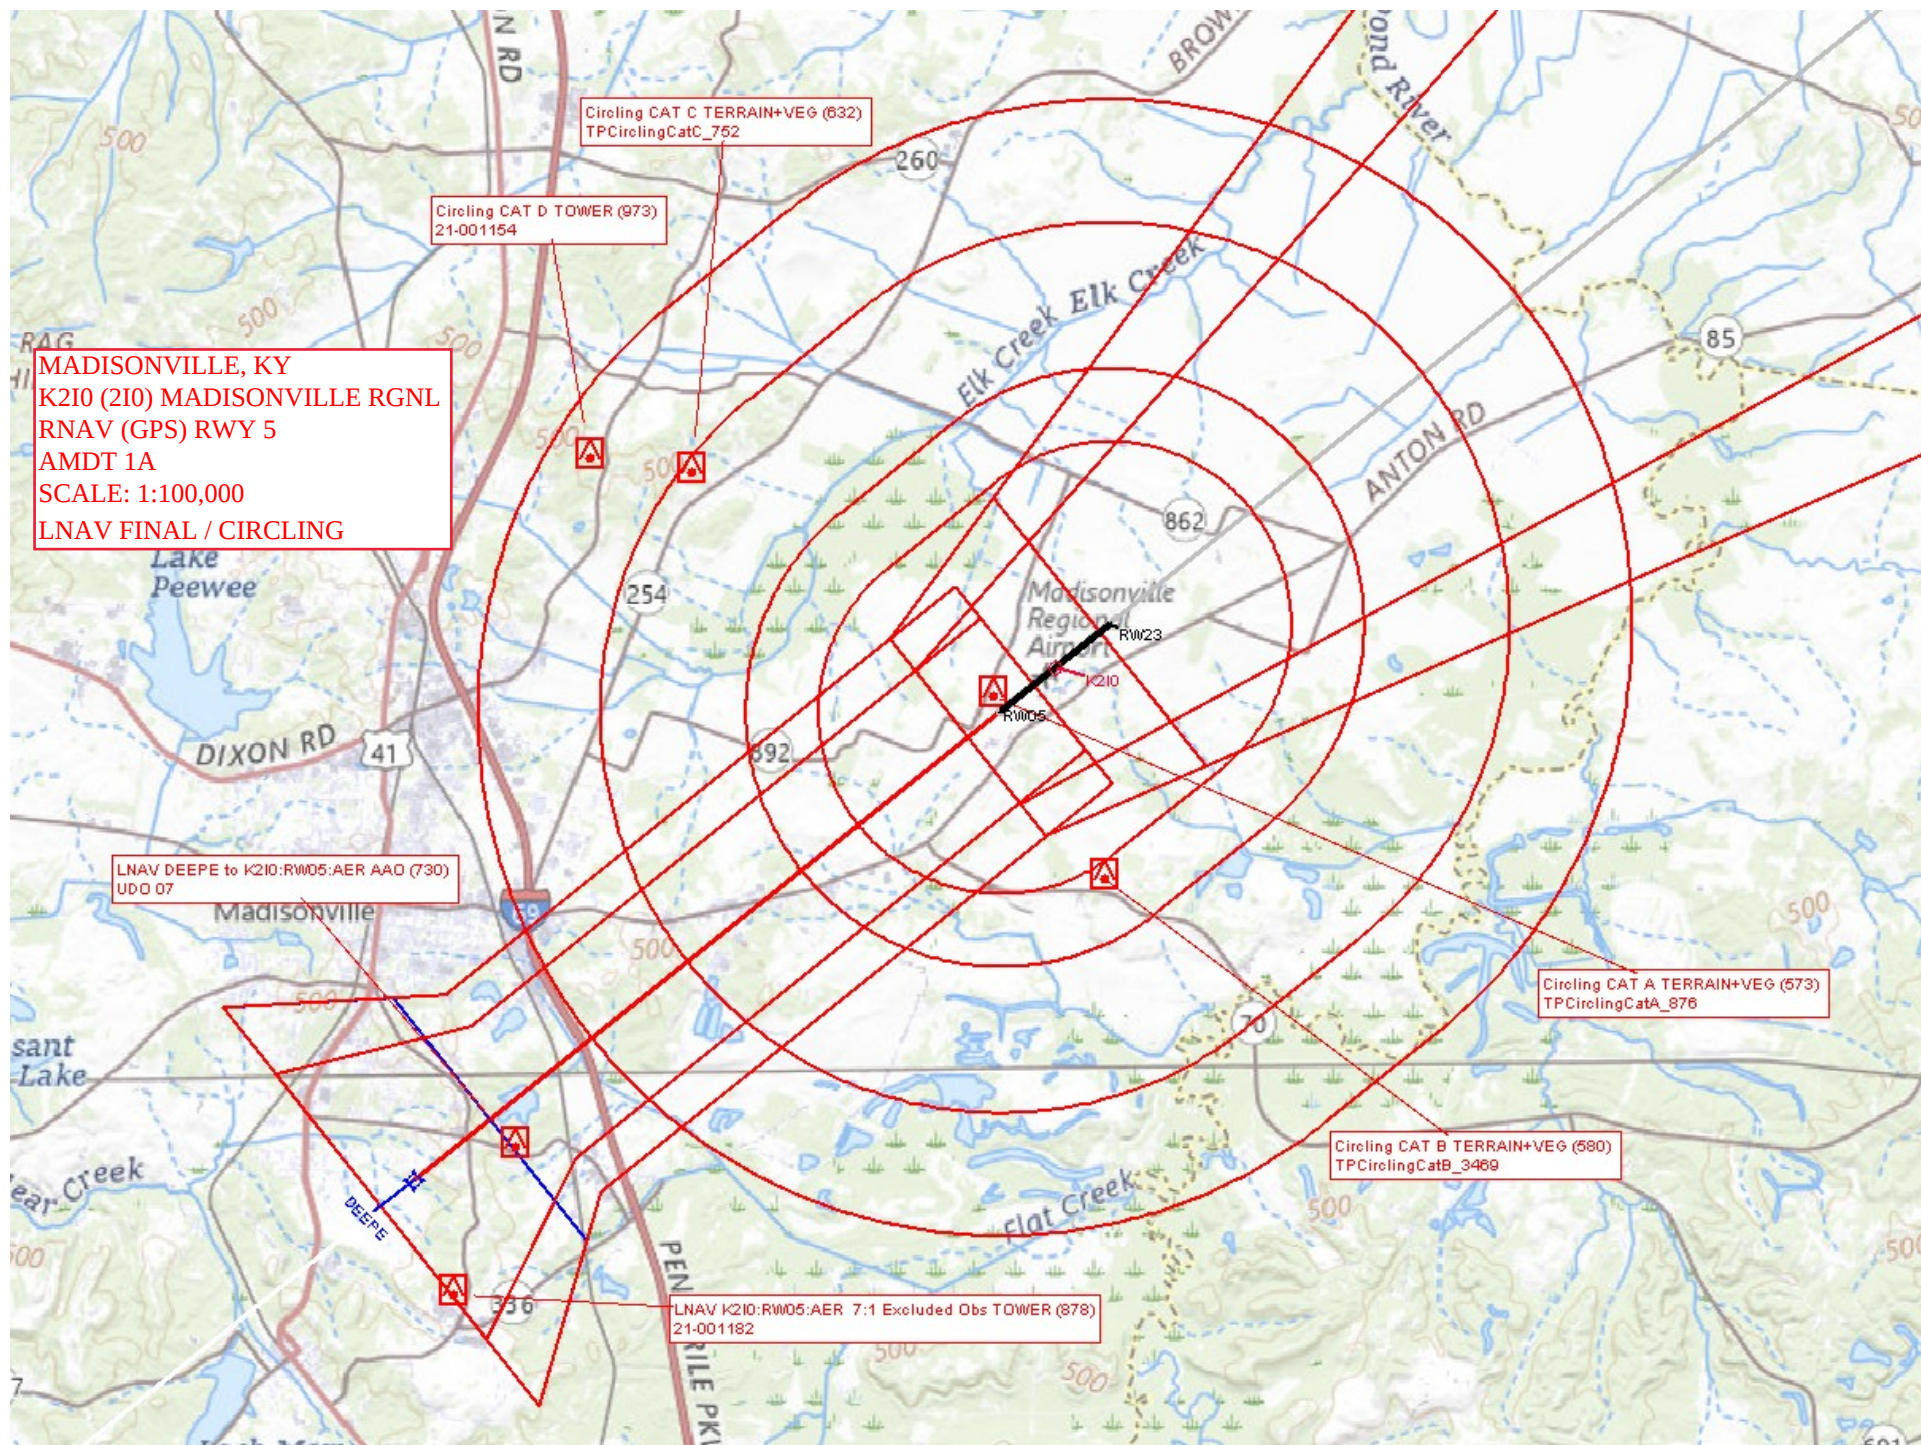

MADISONVILLE, KY
K210 (210) MADISONVILLE RGNL
RNAV (GPS) RWY 5
AMDT 1A
SCALE: 1:100,000
LNAV/VNAV FINAL AND MISSED

