

WAAS CH XXXX XXX	APP CRS 166°	Rwy Idg 5201 TDZE 3432 APT Elev 3459
------------------------	------------------------	---

RNAV (GPS) Z RWY 17

BEND MUNI (KBDN)


RNP APCH - GPS

FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -21° C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING RDM ALTIMETER SETTING. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE RDM ALTIMETER SETTING: INCREASE LPV DA TO 3763 FEET AND ALL VISIBILITIES 1/4 SM; INCREASE LNAV/VNAV DA TO 3821 FEET AND ALL VISIBILITIES 1/4 SM; INCREASE ALL MDAS 100 FEET AND LNAV VISIBILITY CATS C AND D 1/4 SM, AND CIRCLING VISIBILITY CAT C 1/2 SM.


MISSED APPROACH:

CLIMB TO 7400 DIRECT JOGON AND ON TRACK 087.33 TO REMTE AND HOLD, CONTINUE CLIMB-IN-HOLD TO 7400.

AWOS-3 134.425	SEATTLE CENTER 126.15 269.475	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

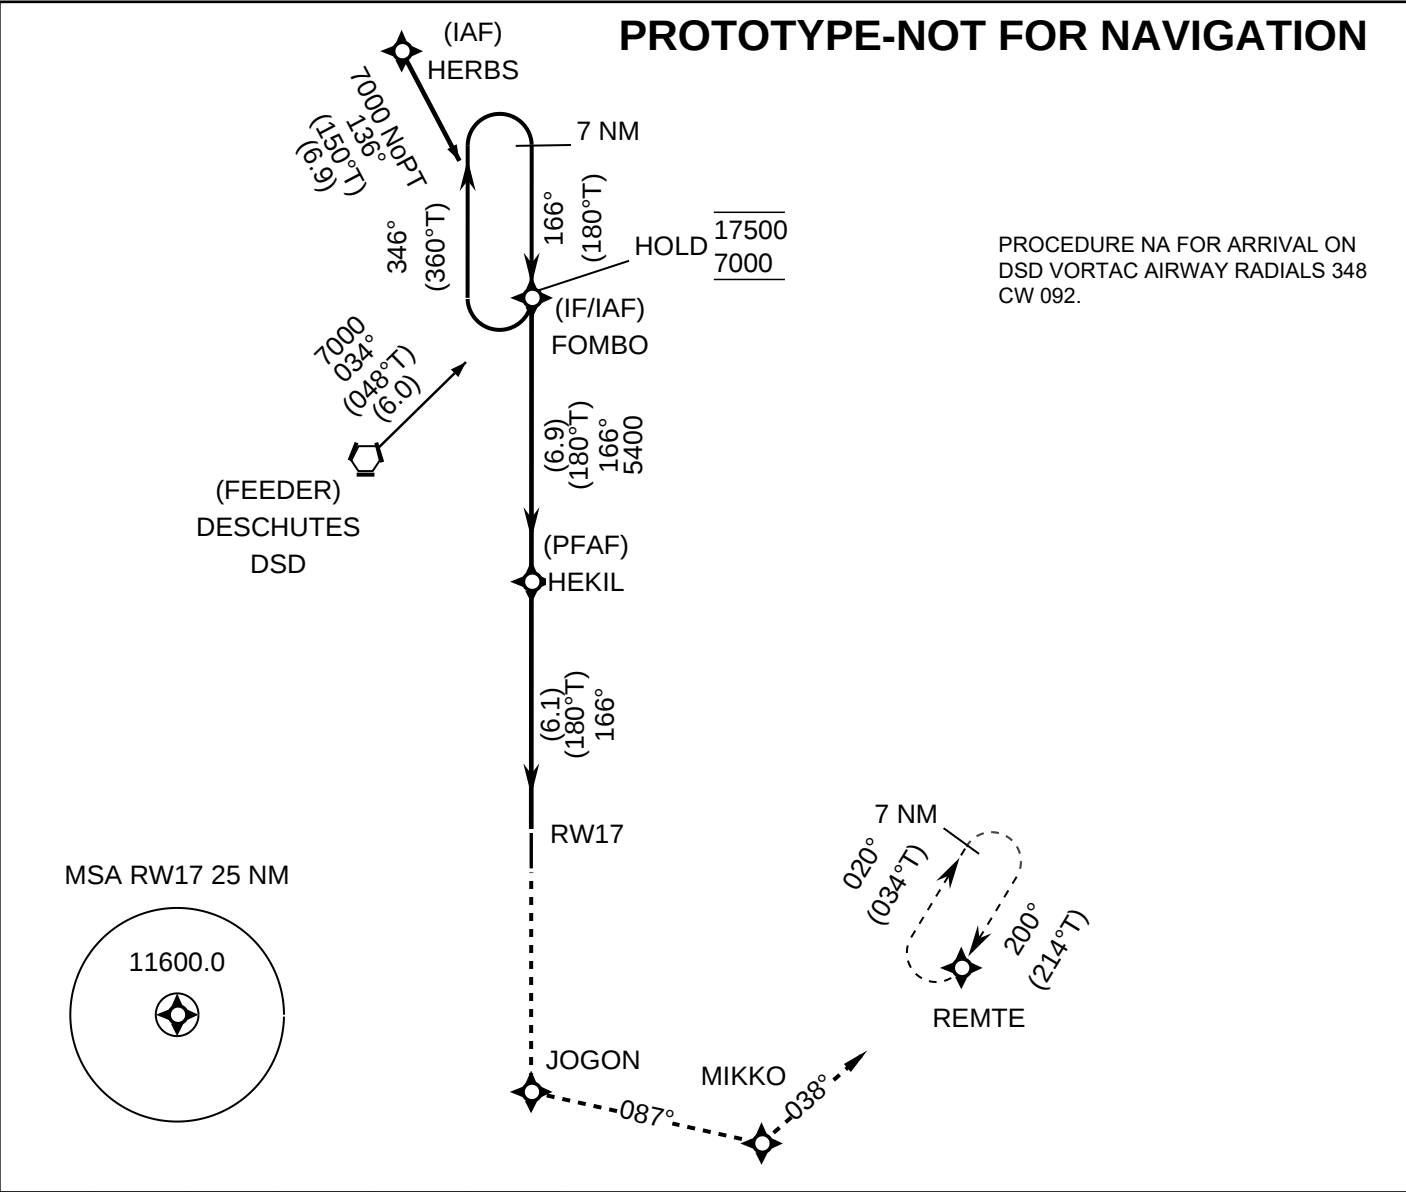

7400 ↑	JOGON ✧ tr 087°	MIKKO ✧ tr 038°	REMTE ✧	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 38).	7 NM FOMBO Holding Pattern
-----------	-----------------------	-----------------------	------------	--	-------------------------------

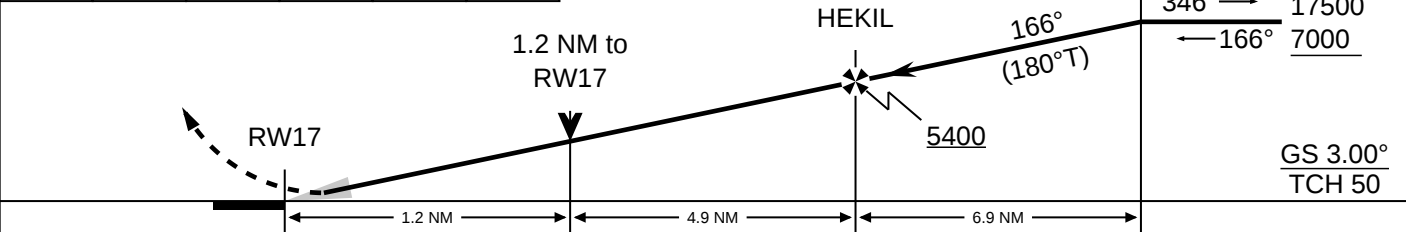

CATEGORY	A	B	C	D
LPV	3682-3/4 250			
LNAV/VNAV	3740-7/8 308			
LNAV	3820-1 388		3820-1 1/8 388	
CIRCLING	3960-1 501	3980-1 521	4120-1 3/4 661	4640-3 1181