


WAAS CH 65800 W35A	APP CRS 353°	Rwy Ldg TDZE 1300 Apt Elev 1302
--	------------------------	---

RNAV (GPS) RWY 35





ABERDEEN RGNL (ABR)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct FISPO and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -22°C or above 54°C.	

ASOS 125.875	MINNEAPOLIS CENTER 120.6 371.9	UNICOM 122.7 (CTAF) 1
------------------------	--	---------------------------------



PROTOTYPE-NOT FOR NAVIGATION

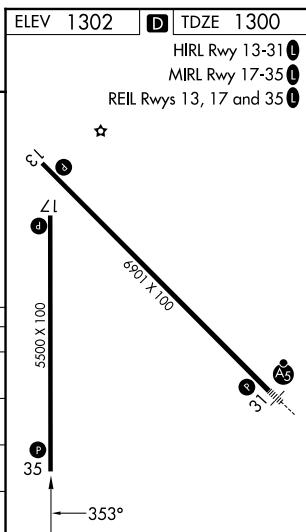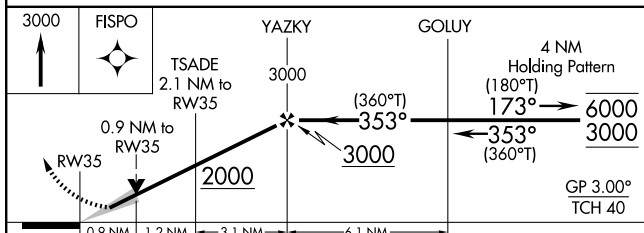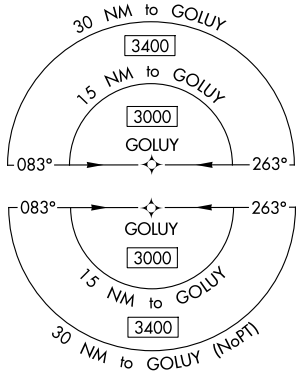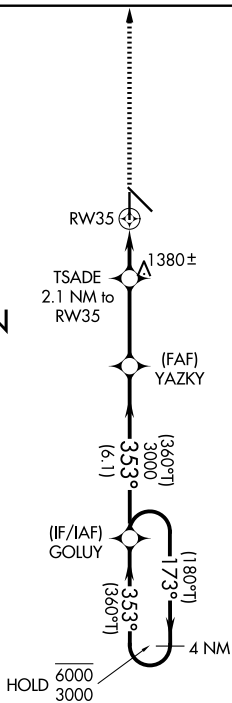

CATEGORY	A	B	C	D
LPV DA		1500-1	200 (200-1)	
LNAV/VNAV DA		1550-1	250 (300-1)	
LNAV MDA		1640-1	340 (400-1)	
CIRCLING	1760-1 458 (500-1)	1860-1 558 (600-1)	1980-2 678 (700-2)	2160-2 3/4 858 (900-2 3/4)