





# MYCAR FOUR DEPARTURE (RNAV)

BURKE LAKEFRONT (BKL)  
CLEVELAND, OHIO

ATIS  
125.25  
CLNC DEL  
339.8  
121.9 (when tower closed)  
GND CON  
121.9 339.8  
LAKEFRONT TOWER ★  
124.3 (CTAF) 339.8  
CLEVELAND DEP CON  
125.35 346.325

**TOP ALTITUDE:  
ASSIGNED BY ATC**

NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.

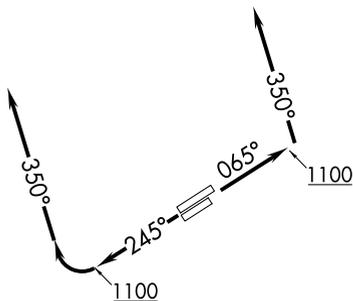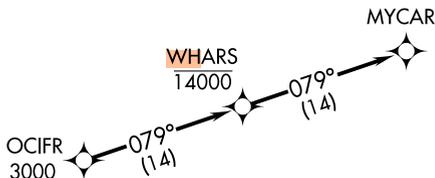

### TAKEOFF MINIMUMS:

Rwys 6L, 6R, 24R: Standard with minimum climb of 500' per NM to 1100.  
Rwy 24L: 400-1<sup>3</sup>/<sub>8</sub> or standard with minimum climb of 757' per NM to 1000.

NOTE: Chart not to scale.



### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6L/R: Climb on heading 065° to 1100, then on heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross OCIFR at or above 3000, thence....

TAKEOFF RUNWAYS 24L/R: Climb on heading 245° to 1100, then right turn on heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross OCIFR at or above 3000, thence....

....on track 079° to cross WHARS at or below 14000, then on track 079° to MYCAR. Maintain altitude assigned by ATC, expect filed altitude ten minutes after departure.