



WAAS CH 40041 W27A	APP CRS 269°	Rwy Idg 6400 TDZE 302 APT Elev 302
--------------------------	-----------------	--

RNAV (GPS) RWY 27

OGDENSBURG INTL (KOGS)

RNP APCH - GPS.	MALSF	MISSED APPROACH: CLIMB TO 800 THEN CLIMBING LEFT TURN TO 2000 DIRECT KOCET AND HOLD.
FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING MSS ALTIMETER SETTING. INOPERATIVE TABLE DOES NOT APPLY TO LPV AND LNAV CAT A AND B. FOR INOPERATIVE ALS INCREASE LNAV/VNAV ALL CATS TO 1 1/8 SM AND LNAV CATS C AND D TO 1 1/8 SM. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE MSS ALTIMETER SETTING AND INCREASE LPV DA TO 636 FEET; INCREASE LNAV/VNAV DA TO 801 FEET AND ALL VISIBILITIES 1/8 SM. INCREASE ALL MDAS 100 FEET AND LNAV VISIBILITY CAT C/D 1/8 SM, AND CIRCLING VISIBILITY CAT C/D 1/4 SM.		
	AWOS-3 118.525	BOSTON CENTER 135.25 377.1
		UNICOM 122.8 (CTAF) 

PROTOTYPE-NOT FOR NAVIGATION

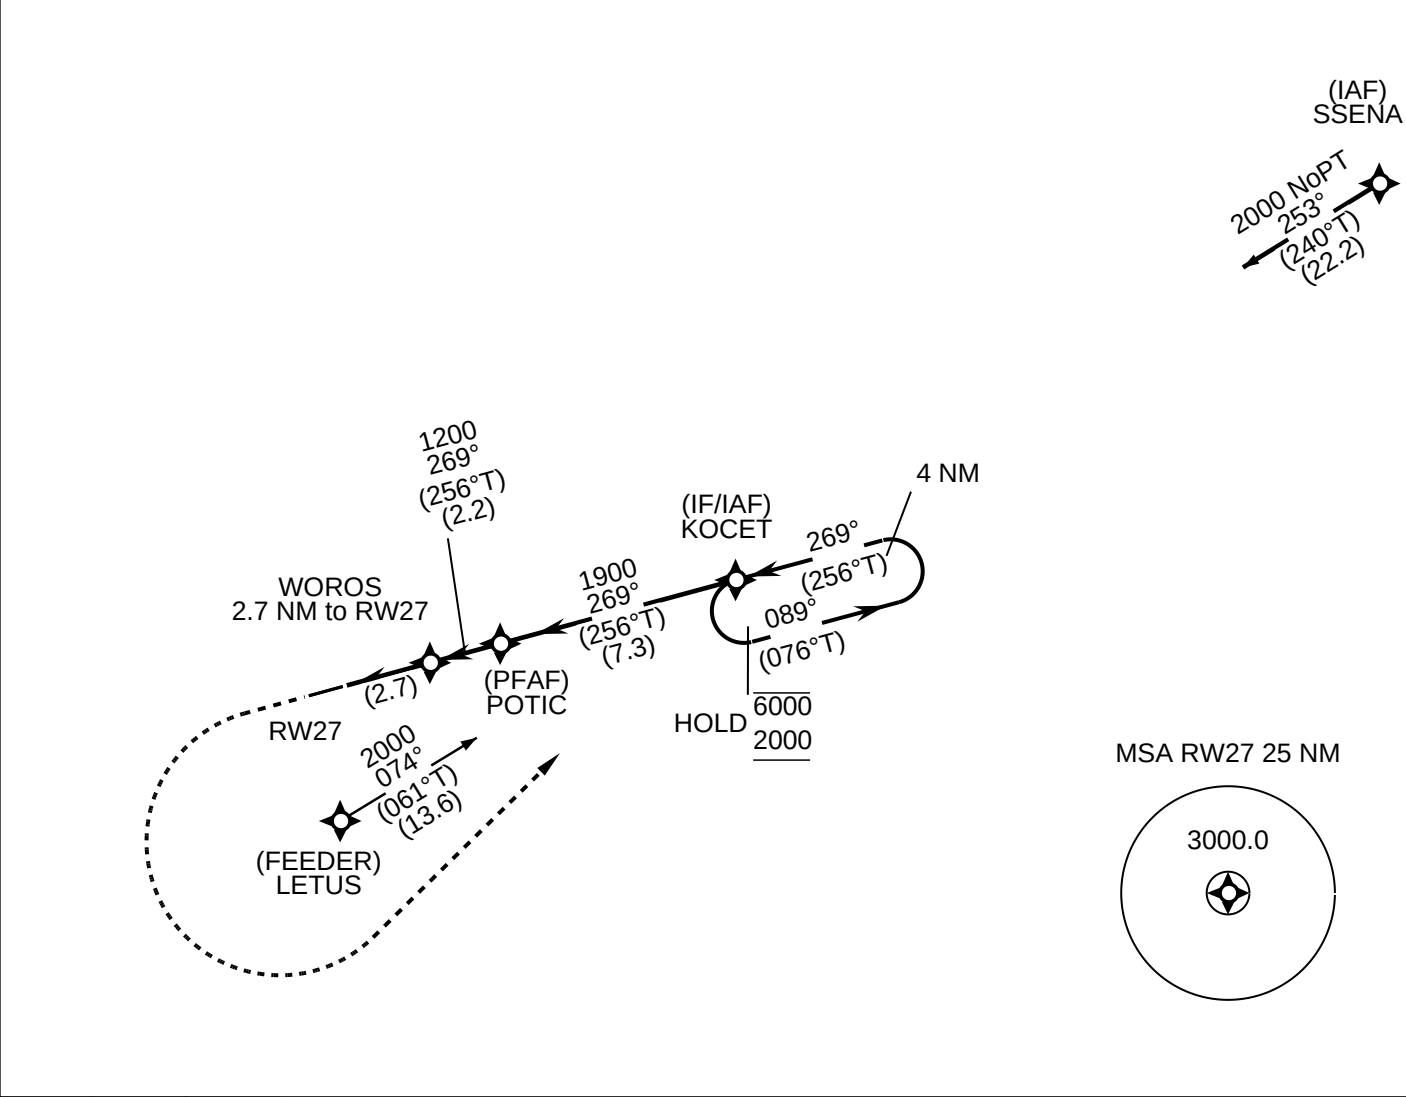

800

2000

KOCET

WOROS

2.7 NM to RW27

POTIC

269° (256°T)

089°

6000

2000

GS 3.00°

TCH 45

1.1 NM to RW27

1200

1900

1.1 NM

1.6 NM

2.2 NM

7.3 NM

CATEGORY	A				B		C		D	
LPV	552-1 250									
LNAV/VNAV	717-1 415									
LNAV	700-1 398									
CIRCLING	760-1 458		1000-1 698		1000-2 698		1000-2 1/4 698			