


WAAS CH 69424 W23A	APP CRS 231°	Rwy Idg TDZE Apt Elev	5545 16 17
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 23

PAGE FLD (FMY)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2000 direct CALOO LOM and hold, continue climb-in-hold.		
Rwy 23 helicopter visibility reduction below ¾ SM NA. When Circling to Rwy 31 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C.						
ATIS 123.725	FORT MYERS APP CON ★ 125.15 306.2 (Rwys 5, 13) 126.8 306.2 (Rwys 23, 31)		PAGE TOWER ★ 119.0 (CTAF) 0 306.95		GND CON 121.7	CLNC DEL 121.7

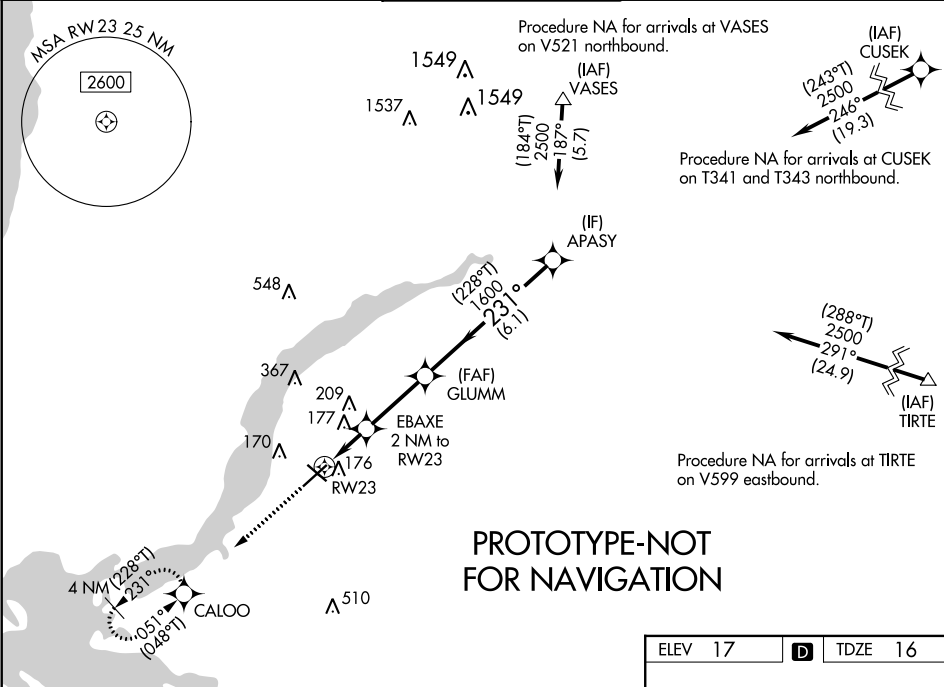

2000 ↑	CALOO 				
CATEGORY	A	B	C	D	
LPV DA	283-7/8 267 (300-7/8)				
LNAV/VNAV DA	392-1 376 (400-1)				
LNAV MDA	440-1	424 (500-1)	440-1 1/4	424 (500-1 1/4)	
CIRCLING	540-1	523 (600-1)	600-1 1/2 583 (600-1 1/2)	680-2 663 (700-2)	

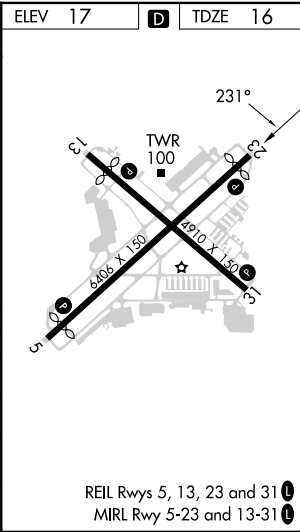

RNAV (GPS) RWY 23