


WAAS CH 73020 W17A	APP CRS 174°	Rwy Idg 8600 TDZE 470 APT Elev 470
--------------------------	-----------------	--



RNAV (GPS) RWY 17L

TSTC WACO (KCNW)

RNP APCH - GPS.	MALSR	MISSED APPROACH: CLIMB TO 2300 DIRECT OMOBE AND HOLD.
FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. PROCEDURE NA FOR ARRIVALS ON ACT VORTAC AIRWAY RADIALS		

305 CW 050.
PROCEDURE NA FOR ARRIVALS ON CQY VORTAC AIRWAY RADIALS 163 CW 263. FOR INOPERATIVE ALS, INCREASE LNAV/VNAV ALL CATS VISIBILITY TO 3/4 SM AND LNAV CATS C/D VISIBILITY TO 1 SM.

PROTOTYPE-NOT FOR NAVIGATION

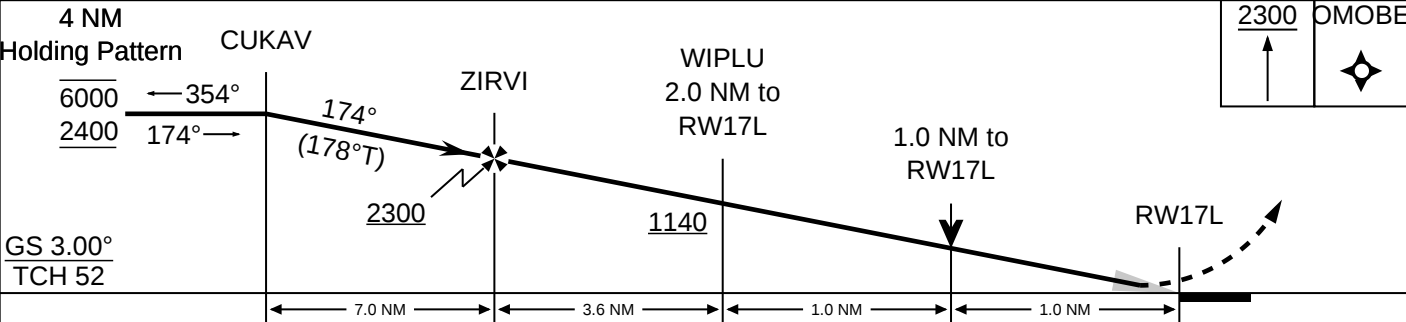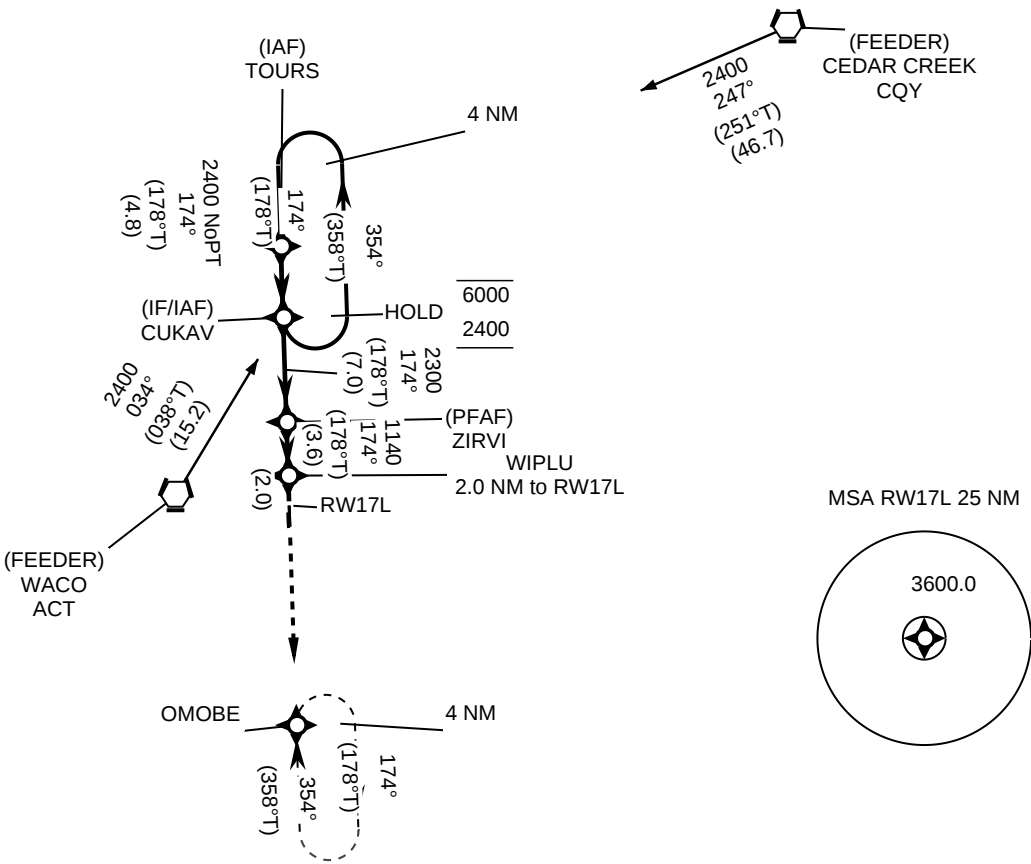

CATEGORY	A	B	C	D
LPV	670-1/2 200			
LNAV/VNAV	720-1/2 250			
LNAV	840-1/2 370		840-5/8 370	
CIRCLING	940-1 470	1040-1 570	1040-1 1/2 570	1120-2 650