

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: E319F97955594CA8B0847ABB283D7FF2	APWS Project ID: 8667C7CC13D740458FBAEC037CB4D71F
Procedure: RNAV (GPS) RWY 17L AMDT 2A		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KCNW			Airport City: WACO		State: TX
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE DATA USED. CLEARs T-NOTAM 5/6400. CONTACT: CASEY HILL (405) 954-0624. QUALITY 21 CHECKED QUALITY 29 CHECKED					

WACO, TEXAS

AL-579 (FAA)


25219

WAAS CH 73020 W17A	APP CRS 174°	Rwy Ldg TDZE Apt Elev	8600 470 470
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 17L
TSTC WACO (CNW)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM. ASR	MALSR AS	MISSED APPROACH: Climb to 2300 direct OMOBE and hold.
---	-------------	---

AWOS-3PT 134.225	WACO APP CON ★ 127.65 227.125	TSTC TOWER ★ 124.0 (CTAF) 255.7	GND CON 121.7 0	UNICOM 122.95
----------------------------	---	---	---------------------------	-------------------------

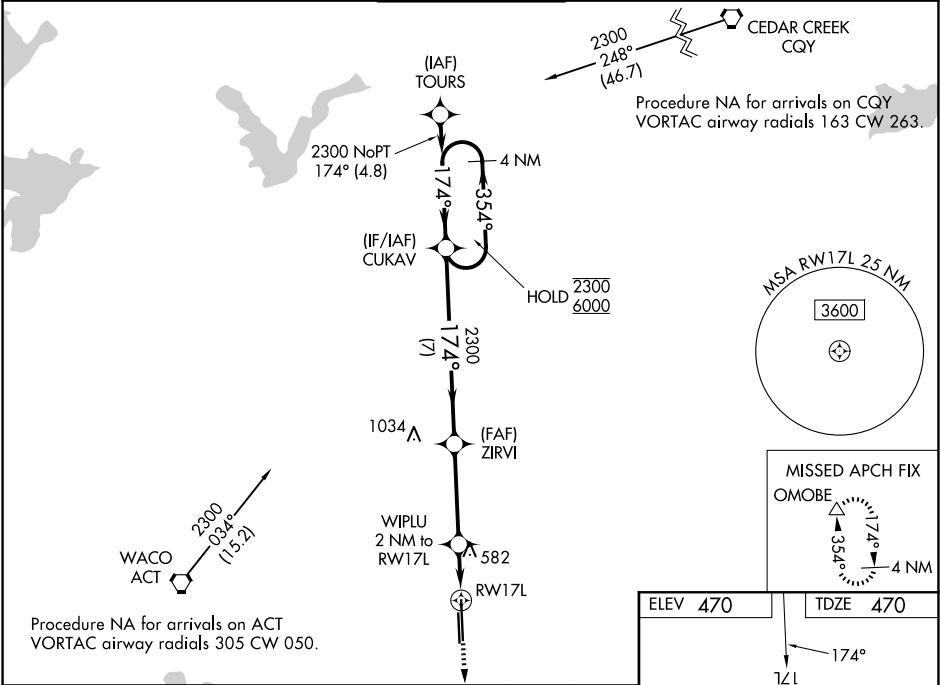

4 NM Holding Pattern		CIRCLING	
6000 ← 354° 2300 → 174°		1040-1 470 (500-1)	
GP 3.00° TCH 52		1040-1 570 (600-1)	
CIRCLING		1040-1½ 570 (600-1½)	
CIRCLING		1120-2 650 (700-2)	

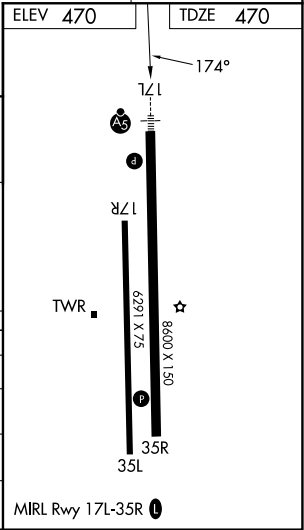

WACO, TEXAS

Amdt 2 05DEC19

31°38'N-97°04'W

TSTC WACO (CNW)
RNAV (GPS) RWY 17L

SC-3, 22 JAN 2026 to 19 FEB 2026

SC-3, 22 JAN 2026 to 19 FEB 2026


WAAS CH 73020 W17A	APP CRS 174°	Rwy Idg 8600 TDZE 470 APT Elev 470
--	------------------------	---

RNAV (GPS) RWY 17L

TSTC WACO (KCNW)

RNP APCH - GPS.	MALSRL	MISSED APPROACH: CLIMB TO 2300 DIRECT OMOBE AND HOLD.
FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. PROCEDURE NA FOR ARRIVALS ON ACT VORTAC AIRWAY RADIALS		
305 CW 050. PROCEDURE NA FOR ARRIVALS ON CQY VORTAC AIRWAY RADIALS 163 CW 263. FOR INOPERATIVE ALS, INCREASE LNAV/VNAV ALL CATS VISIBILITY TO 3/4 SM AND LNAV CATS C/D VISIBILITY TO 1 SM.		

PROTOTYPE-NOT FOR NAVIGATION

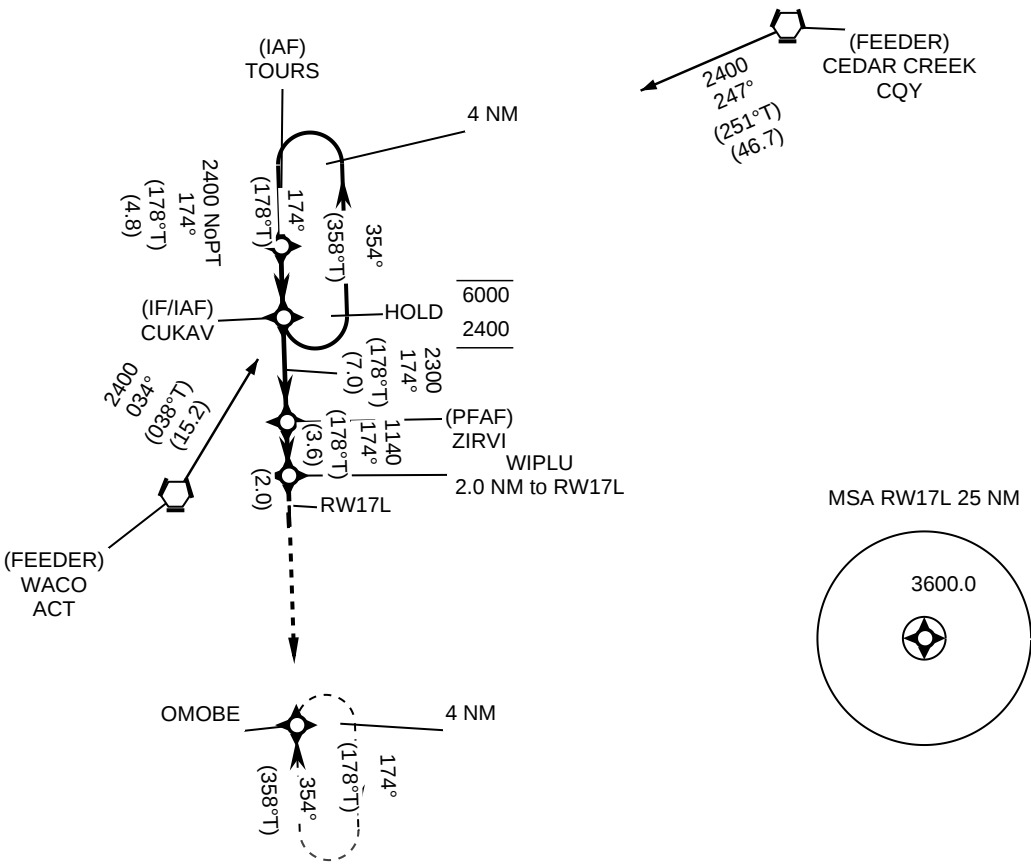

4 NM Holding Pattern CUKAV		WIPLU 2.0 NM to RW17L		2300	OMOBE
6000 ← 354°		174°		↑	
2400 174° →		(178°T)		✦	
GS 3.00°		2300			
TCH 52		1140			
		1.0 NM to RW17L			
		RW17L			
CATEGORY	A	B	C	D	
LPV	670-1/2 200				
LNAV/VNAV	720-1/2 250				
LNAV	840-1/2 370		840-5/8 370		
CIRCLING	940-1 470	1040-1 570	1040-1 1/2 570	1120-2 650	