

Flight Procedures Cover Page	Task Action: Abbreviated Amendment	Task Type: SID	Estimated Chart Date: 10/29/2026	APWS Task ID: E87D6C6215A74B1F81B81D5F4C30C722	APWS Project ID: E4CCE99CFBB540E98912F9DC298085A3
Procedure: ZAAPA SEVEN (RNAV) CLEVELAND, OH KBKL		Enroute: YES	Specialist: Keefer, John		Agreement Number:
Airport ID: KCLE			Airport City: CLEVELAND		State: OH
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: Procedure amended to remove BKL. BKL will receive a new SID. Active airport data used. PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021 GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. Contact April Sarmento 405-954-0337. QUALITY 23 CHECKED QUALITY 41 CHECKED					

EC-2, 16 APR 2026 to 14 MAY 2026

ACTIVE

CLE

DEPARTURE ROUTE	DESCRIPTION
TAKEOFF RUNWAY 6L:	Climb on heading 058° to intercept course 009° to cross EDMNN at or above 2000 and at or below 240K, then on track 318° to FTTZZ, then on track 250° to cross DINAA at or above 8000, then on track 235° to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 6R:	Climb on heading 058° to intercept course 005° to cross EDMNN at or above 2000 and at or below 240K, then on track 318° to FTTZZ, then on track 250° to cross DINAA at or above 8000, then on track 235° to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 10:	Climb on heading 101° to 3000, then as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 24L:	Climb on heading 238° to intercept course 255° to cross DWEZL at or below 6000, then on track 250° to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 24R:	Climb on heading 238° to intercept course 254° to cross DWEZL at or below 6000, then on track 250° to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 28:	Climb on heading 281° to 2200, then as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain 14000, expect filed altitude ten minutes after departure.	
PUUDL TRANSITION (ZAAPA6.PUUDL)	
SINKR TRANSITION (ZAAPA6.SINKR)	
SNNOH TRANSITION (ZAAPA6.SNNOH)	

EC-2, 16 APR 2026 to 14 MAY 2026

EC-2, 16 APR 2026 to 14 MAY 2026

(ZAAPA6.ZAAPA) 25331

AL-5370 (FAA) **BKL**
ACTIVE

BURKE LAKEFRONT (BKL)
CLEVELAND, OHIO

ZAAPA SIX DEPARTURE (RNAV)


TOP ALTITUDE:
ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

CLEVELAND DEP CON
125.35 346.325
ATIS
125.25
CINC DEL
339.8
121.9 (when twr closed)
GND CON
121.9 339.8
LAKEFRONT TOWER★
124.3 (CTAF) 339.8

TAKEOFF MINIMUMS:
Rwys 6L, 24R: Standard with minimum climb
of 500' per NM to 1100.
Rwys 6R: Standard with minimum climb of 500'
per NM to 1100. NA when control tower closed.
Rwy 24L: 400-1³/₄ or standard with minimum
climb of 757' per NM to 1000. NA when control tower closed.


NOTE: PUUDL TRANSITION: For aircraft at or
below FL220 only or as assigned by ATC.
NOTE: Rwy 6R/24L: Takeoff minimums NA when
control tower closed.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6L/R: Climb on heading 065° to 1100, then on heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 24L/R: Climb on heading 245° to 1100, then right turn heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....
....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA6.PUUDL)
SINKR TRANSITION (ZAAPA6.SINKR)
SNNOH TRANSITION (ZAAPA6.SNNOH)

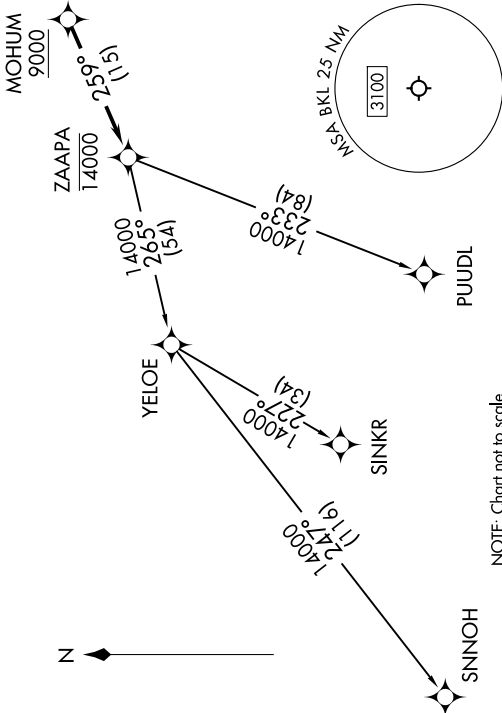

NOTE: Chart not to scale.

ZAAPA SIX DEPARTURE (RNAV)
(ZAAPA6.ZAAPA) 27NOV25

CLEVELAND, OHIO
BURKE LAKEFRONT (BKL)