


# WELLY FOUR DEPARTURE (RNAV)

**TOP ALTITUDE:  
RWYS 10L/28R: 4000  
RWYS 14/32: 1500**

RNAV 1-DME/DME/IRU or GPS.  
RADAR required.


PALM BEACH DEP CON  
127.35 343.6  
D-ATIS  
123.75  
CLNC DEL  
121.6 284.6  
CPDLC  
GND CON  
121.9 284.6  
PALM BEACH TOWER  
119.1 257.8

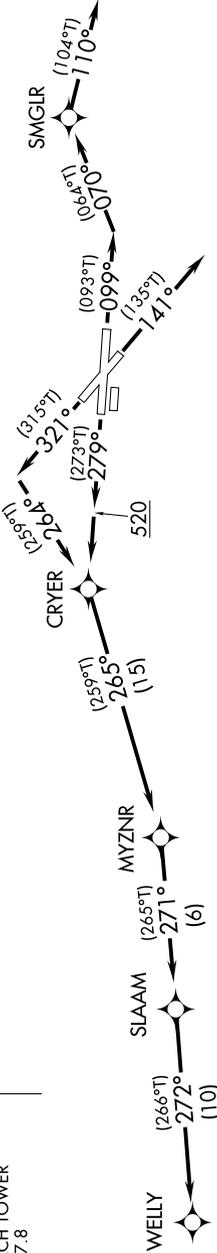

NOTE: Jet aircraft only.

TAKEOFF MINIMUMS  
Rwys 14, 28R: Standard.  
Rwys 10L, 32: Standard with minimum climb of 500' /NM to 520.

## PROTOTYPE-NOT FOR NAVIGATION



NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 10L:** Climb on heading 099° to intercept course 070° to SMGLR, then on track 110° for vectors to SLAAM, thence . . . .

**TAKEOFF RUNWAY 14:** Climb on heading 141° for vectors to SLAAM, thence . . . .

**TAKEOFF RUNWAY 28R:** Climb on heading 279° to 520, then direct CRYER, then on depicted route to SLAAM, thence . . . .

**TAKEOFF RUNWAY 32:** Climb on heading 321° to intercept course 264° to CRYER, then on depicted route to SLAAM, thence . . . .

. . . . on track 272° to WELLY. Rwys 10L/28R maintain 4000. Rwys 14/32 maintain 1500. Expect filed altitude 10 minutes after departure.