


WAAS CH 56400 W27A	APP CRS 273°	Rwy Idg 6000 TDZE 8 APT Elev 10
--	------------------------	--

RNAV (GPS) RWY 27L

MIAMI EXEC (KTMB)

RNP APCH - GPS.					MISSED APPROACH: CLIMB TO 2000 DIRECT HAXAM AND HOLD.
RWY 27L HELICOPTER VISIBILITY REDUCTION BELOW 3/4 SM NOT AUTHORIZED. CIRCLING RWY 13 NA AT NIGHT. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING MIA ALTIMETER SETTING. SIMULTANEOUS APPROACH AUTHORIZED. LNAV PROCEDURE NA DURING SIMULTANEOUS OPERATIONS. USE OF FD OR AP REQUIRED DURING SIMULTANEOUS OPERATIONS. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE MIA ALTIMETER SETTING AND INCREASE LPV DA TO 233 FEET; INCREASE LNAV/VNAV DA TO 366 FEET; INCREASE ALL MDAS 40 FEET AND LNAV VISIBILITY CATS C/D 1/4 SM.					
ATIS 124.0	MIAMI APP CON 125.5 354.1	MIAMI EXEC TOWER 118.9 (CTAF)	GND CON 121.7	CLNC DEL 133.0	

PROTOTYPE-NOT FOR NAVIGATION

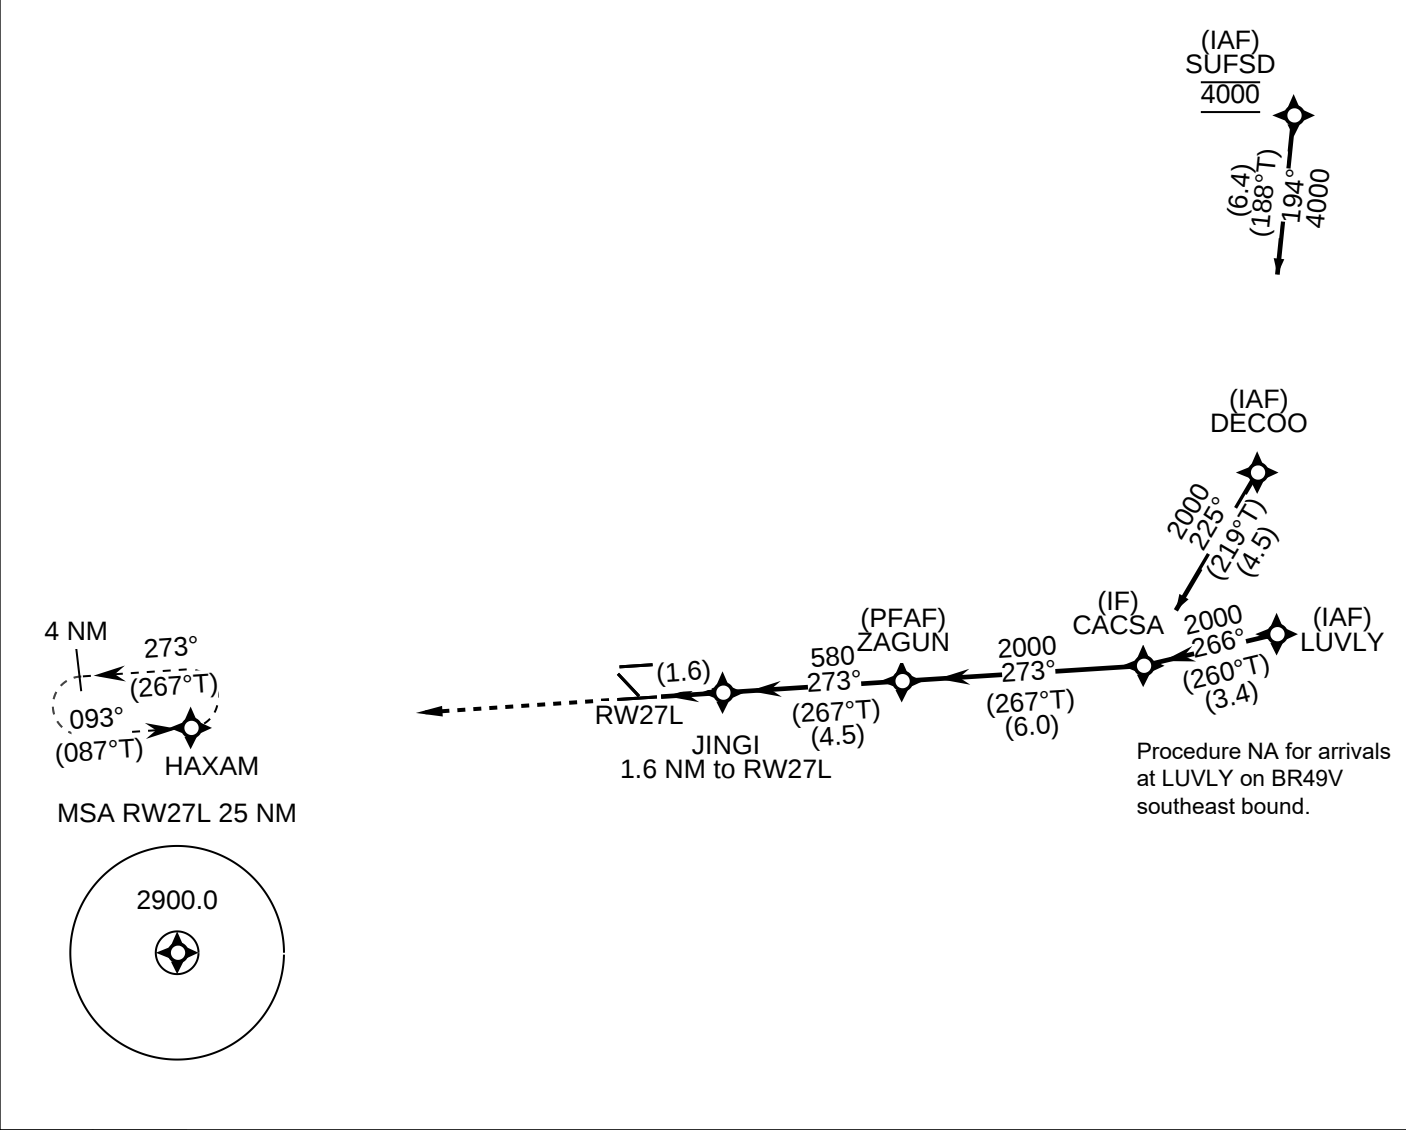

<u>2000</u>	HAXAM				
↑	✦				
		<u>2000</u>			