



Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 10/29/2026	APWS Task ID: EB3C7389FE3445A1B1C648CA559D7BBF	APWS Project ID: B4A46BE320844508847D64D8F00CFAD1
Procedure: LOC RWY 22 AMDT 7G		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KUUU			Airport City: NEWPORT		State: RI
Facility ID: OTI	Facility Type: LOC	Flight Inspection Remark Type:			
Procedure Comments: Visibility Initiative (Garmin) - Update IAP visibility minimums IAW Order 8260.3, Chapter 3, Section 3-3. Visibility Minimums. PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. CONTACT: CASEY HILL (405) 954-0624. QUALITY 6 CHECKED SN 4/21/26 QUALITY 9 CHECKED BEGUE					

LOC/DME	I-OTI	APP CRS	Rwy Ldg	2999
108.5		219°	TDZE	172
Chan 22			Apt Elev	172

LOC RWY 22
NEWPORT STATE (UUU)

NA	When local altimeter setting not received, use Providence altimeter setting and increase all MDA 60 feet. Straight-in Rwy 22 NA at night, Circling Rwy 4, 22, 34 NA at night.	MISSED APPROACH: Climbing left turn to 2100 via PVD VOR/DME R-165 to NICOD INT/21.5 DME and hold.
----	---	---

ASOS 132.075	PROVIDENCE APP CON* 128.7 269.525	CLNC DEL 127.25	UNICOM 123.05 (CTAF) 0
-----------------	--------------------------------------	--------------------	---------------------------

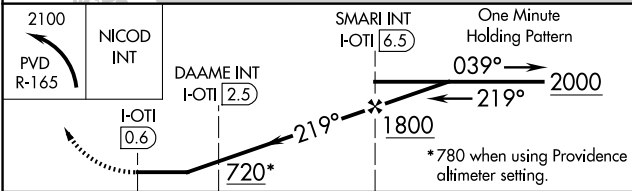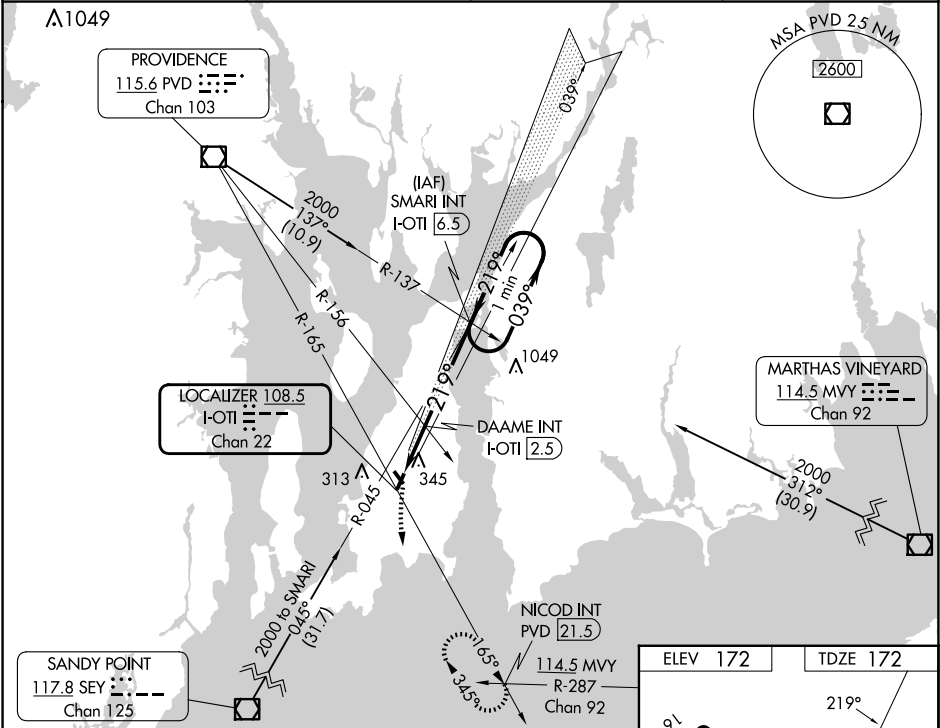

CATEGORY	A	B	C	D
S-22	720-1 548 (600-1)		720-1 ⁵ / ₈ 548 (600-1 ⁵ / ₈)	NA
CIRCLING	760-1 588 (600-1)		780-1 ³ / ₄ 608 (700-1 ³ / ₄)	NA
DAAME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-22	640-1 468 (500-1)		640-1 ¹ / ₄ 468 (500-1 ¹ / ₄)	NA
CIRCLING	760-1 588 (600-1)		780-1 ³ / ₄ 608 (700-1 ³ / ₄)	NA

