

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 06/12/2025	APWS Task ID: F3A2013840224C2182D5F9B6DB587DF5	APWS Project ID: 7C5477A028974EFE84898A4619799786
Procedure: HI - ILS Z OR LOC Z RWY 3 AMDT 10		Enroute: NO	Specialist: Wilkinson, Christopher		Agreement Number:
Airport ID: KFSD			Airport City: SIOUX FALLS		State: SD
Facility ID: FSD	Facility Type: ILS	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: UTILIZED ACTIVE DATA FOR KFSD AND RWYS. VOR MON: DELETED YKN VOR/DME AND FEEDER SEGMENT. CLEARs NOTAM FDC 4/0337. CLEARs NOTAM FDC 5/2805. CONTACT CASIMIR TABAKA, AJV-A430, 405-202-7857. QUALITY 34 CHECKED					

FIPC BASIC FORM							
PROCEDURE: HI - ILS Z OR LOC Z RWY 3 AMDT 10			AIRPORT NAME: JOE FOSS FLD		AIRPORT ID: KFSD	SPECIAL CONTROL NO: BP-03-281-25	
FAC ID: FSD		CITY: SIOUX FALLS			ST: SD	ORIG CHART DATE: 06/12/2025	
DFL TYPE: PROC/A	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:		PTS TASK ID: F3A2013840224C2182D5F9B6DB587DF5		
PREFLIGHT NOTES							
REVIEWER: scott wiebe					DATE: 06/05/2025		
COMMENTS:					CHECK ONE:		
					☒ FLT CK REQ ☐ NFCR ☐ REJECT		
							YES
					CPV COMPLETE?		X
PROCEDURE RESULTS							
INSPECTION DATE: 06/05/2025		CREW #: VN219	N #: N81	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☐ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: scott wiebe @ 06/05/2025 18:16			PRINTED NAME: WIEBE, GREGORY SCOTT				NOTAM INITIATED? ☐ YES ☒ NO
FLIGHT INSPECTOR REMARKS:							
IN-FLIGHT OBSTACLE REPORT							
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):		BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:

FIG

HI-ILS Z or LOC Z RWY 3
JOE FOSS FLD (FSD)

MISSED APPROACH: Climb to 3000 then climbing left turn to 5000 on heading 230° and on FSD VORTAC R-269 to FRYRE/FSD 1.5 DME and hold.

MISSED APCH FIX


FRYRE
FSD 15

(278°)
← R-269

089°
(098°)
← 269°
(278°)


115.0 FSD

Chan 97

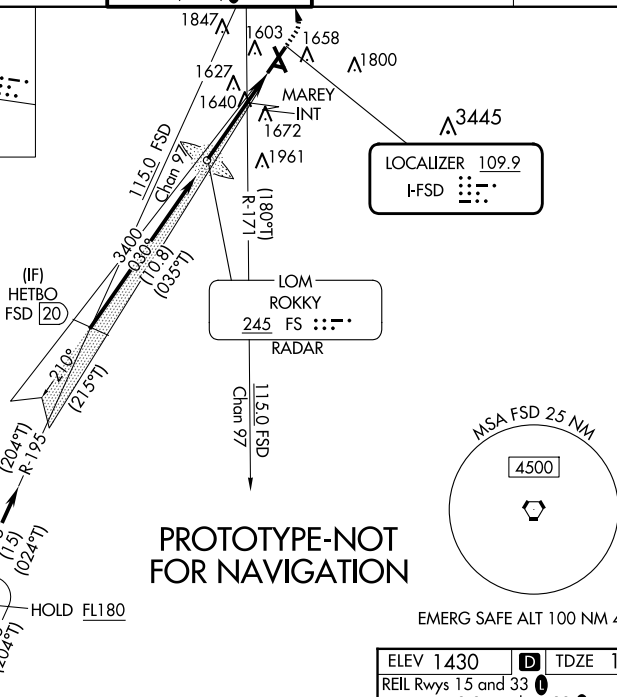


PROTOTYPE-NOT
FOR NAVIGATION

EMERG SAFE ALT 100 NM 4600

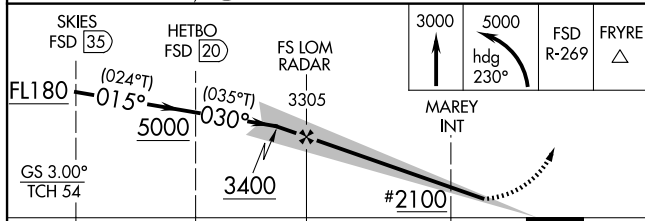

15 NM 10.8 NM 4.3 NM 1.4 NM					
CATEGORY	A	B	C	D	E
S-ILS 3*	NA		1674/24 250 (300-½)		
S-LOC 3#	NA		2100-1½ 676 (700-1½)		
 CIRCLING	NA		2100-1⅞ 670 (700-1⅞)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 3†	NA		1940/55 516 (600-1)		
 CIRCLING	NA		2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)

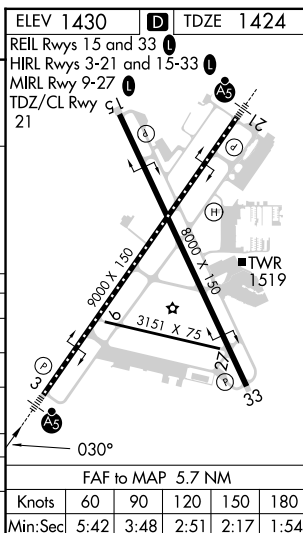

HI-ILS Z or LOC Z RWY 3

SIoux FALLS, SOUTH DAKOTA

LOC I-FSD 109.9	APCH CRS 030°	Rwy ldg 8999 TDZE 1424 Arprt Elev 1430
--------------------	------------------	--

OLD



AL-396 [USAF]

HI-ILS or LOC RWY 3

JOE FOSS FLD (KFSD)

DME required. * When ALS inop, increase CAT CDE RVR to 40, vis to ¾ mile. ** When ALS inop, increase CAT CDE vis to 1½ mile. *** When ALS inop, increase CAT CDE RVR to 55, vis to 1 mile.	MALSR A5	MISSED APPROACH: Climb to 3400, then climbing left turn to 5000 on heading 240° and FSD VORTAC R-269 to FRYRE (FSD 1.5 DME) and hold.
---	-------------	---

ATIS 126.6	SIoux FALLS APP CON 125.8 306.2	SIoux FALLS TOWER ★ 118.3(CTAF) 257.8	GND CON 121.9 348.6	ASR
---------------	------------------------------------	--	------------------------	-----

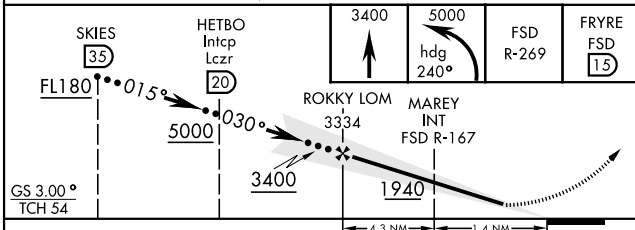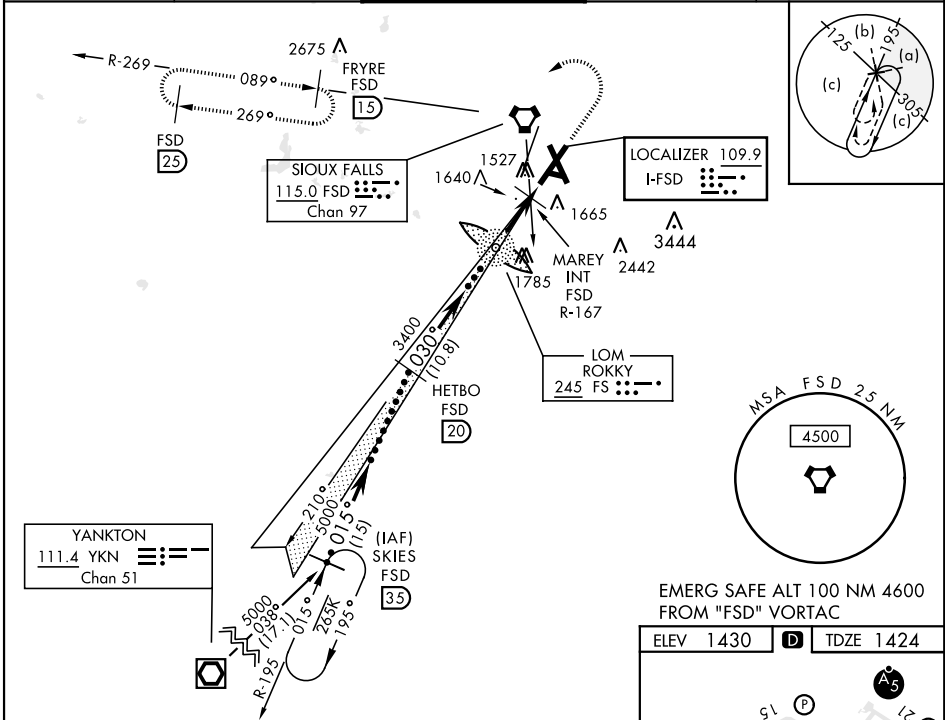

CATEGORY	C	D	E
S-ILS 3 *	1674/24	250	(300-½)
S-LOC 3 **	1940/55 516 (600-1)	1940/60 516 (600-1½)	
CIRCLING	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)
MAREY FIX MINIMA			
S-LOC 3 ***	1780/30 356 (400-¾)	1780/40 356 (400-¾)	
CIRCLING	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	2300-3 870 (900-3)

SIoux FALLS, SOUTH DAKOTA

43°35'N-96°45'W

JOE FOSS FLD (KFSD)

Amtd 9B 04NOV21

HI-ILS or LOC RWY 3

NC-1, 03 OCT 2024 to 31 OCT 2024

