

ESCALANTE, UTAH

AL-9498 (FAA)


FIG

APP CRS	Rwy Idg	5032
309°	TDZE	5723
	Apt Elev	5737

RNAV (GPS) RWY 31 ESCALANTE MUNI (1L7)

RNP APCH - GPS.		MISSED APPROACH: Climb to 7600 then climbing left turn to 9500 direct UVCEH and hold, continue climb-in-hold to 9500. *Missed approach requires minimum climb of 328 feet per NM to 8000. #Missed approach requires minimum climb of 306 feet per NM to 7900.
⚠ Baro-VNAV NA. Rwy 31 helicopter visibility reduction below ¾ SM NA. Circling NA northeast of Rwy 13-31. Procedure NA at night. Use PGA altimeter setting.		

PGA ASOS 120.625	SALT LAKE CENTER 133.6 269.25	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

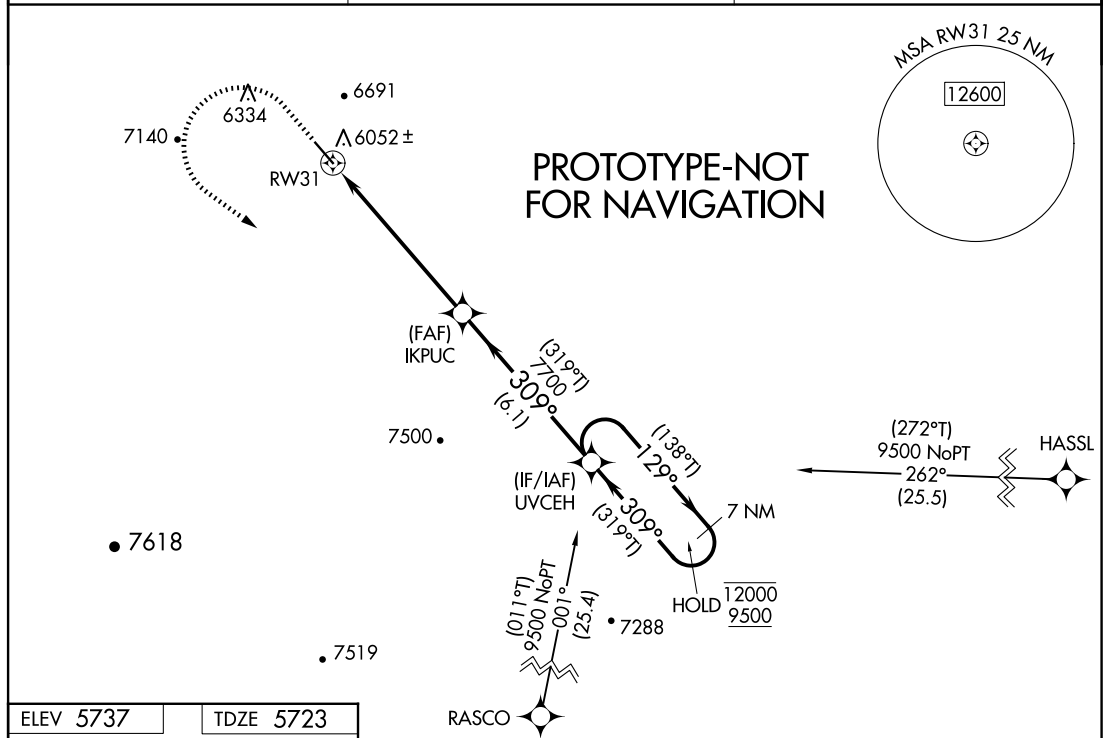

ELEV 5737	TDZE 5723
-----------	-----------

	7600	9500	UVCEH		
	IKPUC		7700	7700	UVCEH
	RW31		6.1 NM	6.1 NM	7 NM Holding Pattern (139°T) 129° 309° (319°T) 12000 9500
	CATEGORY	A	B	C	D
	LNAV/VNAV DA*	6534-2½	811 (800-2½)	NA	
	LNAV MDA#	6760-1¼ 1037 (1100-1¼)	6760-1½ 1037 (1100-1½)	NA	
	LNAV/VNAV DA	7169-6	1446 (1500-6)	NA	
MIRL Rwy 13-31 0 REIL Rwy 13 and 31	LNAV MDA	7280-1¼ 1557 (1600-1¼)	7280-1½ 1557 (1600-1½)	NA	
	CIRCLING	7280-1¼ 1543 (1600-1¼)	7280-1½ 1543 (1600-1½)	NA	

ESCALANTE, UTAH

Amdt 1 FIG

37°45'N-111°34'W

ESCALANTE MUNI (1L7) **RNAV (GPS) RWY 31**

AUTOMATED AL-9498 RNAV (GPS) RWY 31

SW-4
1-30-25
COMPILER: JUN
REVIEWER:
DBL CHKR:
EFF: FIG