

FIG

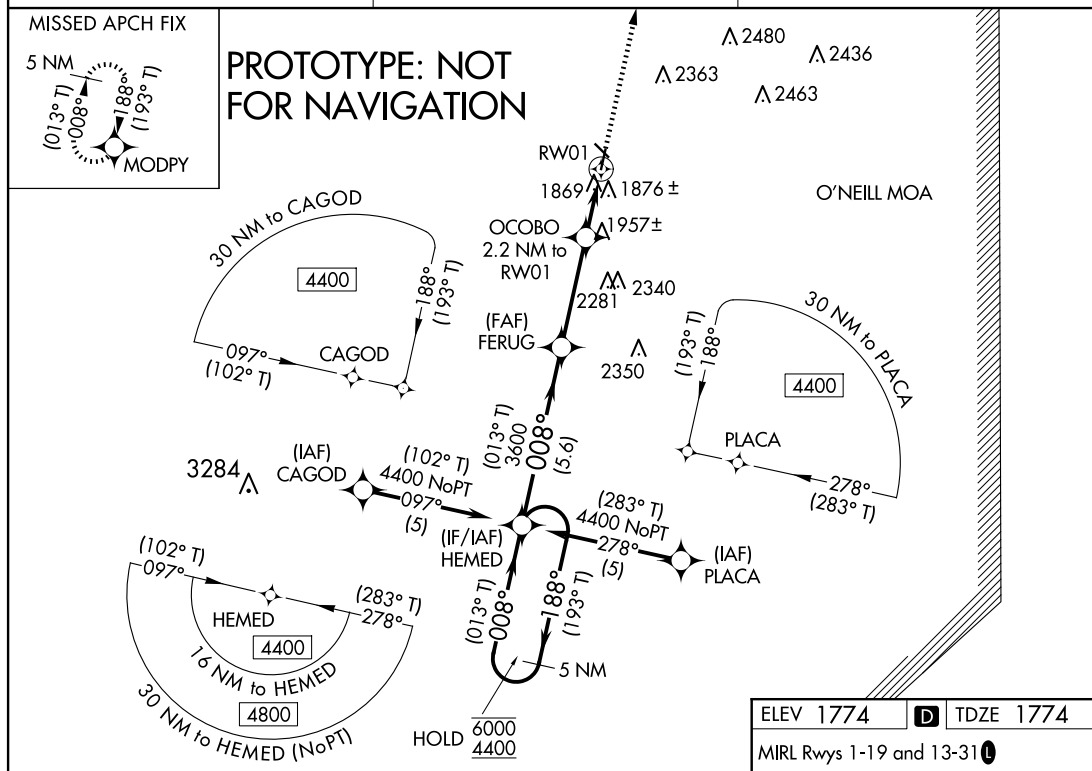
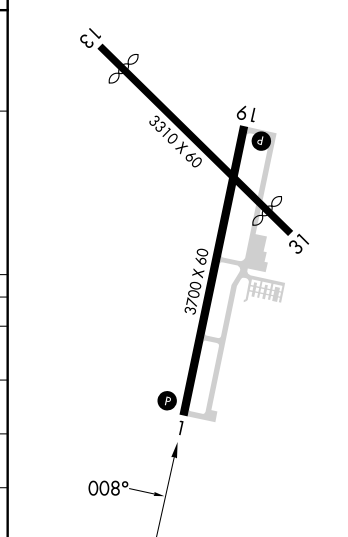
RNAV (GPS) RWY 1

ANTELOPE COUNTY (4V9)

A Baro-VNAV NA and VDP NA when using BVN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Circling to Rwy 13, 31 NA at night. When local altimeter setting not received, use BVN altimeter setting and increase all LPV DA to 2032 feet; increase LNAV/VNAV DA to 2227 feet and all visibilities ¼ SM. Increase all MDAs 60 feet.

MISSED APPROACH: Climb to 4400 direct MODPY and hold, continue climb-in-hold to 4400.

AWOS-3PT 119.275	MINNEAPOLIS CENTER 128.0 257.95	UNICOM 122.8 (CTAF) ①
----------------------------	---	---------------------------------

[illegible]

AUTOMATED AL-10382 RNAV (GPS) RWY 1

NC-2

7 APR 2025

COMPILER: CG

REVIEWER:

DBL CHKR:

EFF: FIG

ANTELOPE COUNTY (4V9)

RNAV (GPS) RWY 1