

WAAS CH 58312 W25A	APP CRS <b>251°</b>	Rwy Idg <b>5008</b> TDZE <b>7</b> APT Elev <b>7</b>
--------------------------	------------------------	---

# RNAV (GPS) RWY 25

THE FLORIDA KEYS MARATHON INTL (KMTH)


RNP APCH - GPS.

RWY 25 HELICOPTER VISIBILITY REDUCTION BELOW 1 SM NOT AUTHORIZED. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE EYW ALTIMETER SETTING: INCREASE LPV DA TO 408 AND ALL VISIBILITIES 1/8 SM, LNAV/VNAV DA TO 497 FEET AND ALL VISIBILITIES 1/4 SM, INCREASE ALL MDAS 100 FEET AND LNAV CAT C/D VISIBILITY 1/4 SM AND CIRCLING CAT C/D VISIBILITY 1/2 SM. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW 12°C OR ABOVE 54°C. BARO-VNAV NA WHEN USING EYW ALTIMETER SETTING. PROCEDURE NA AT NIGHT.


MISSED APPROACH: CLIMB TO 2800 DIRECT JANKA AND HOLD.

AWOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.975 (CTAF)
-----------------	-----------------------------	--------------------------

## PROTOTYPE-NOT FOR NAVIGATION

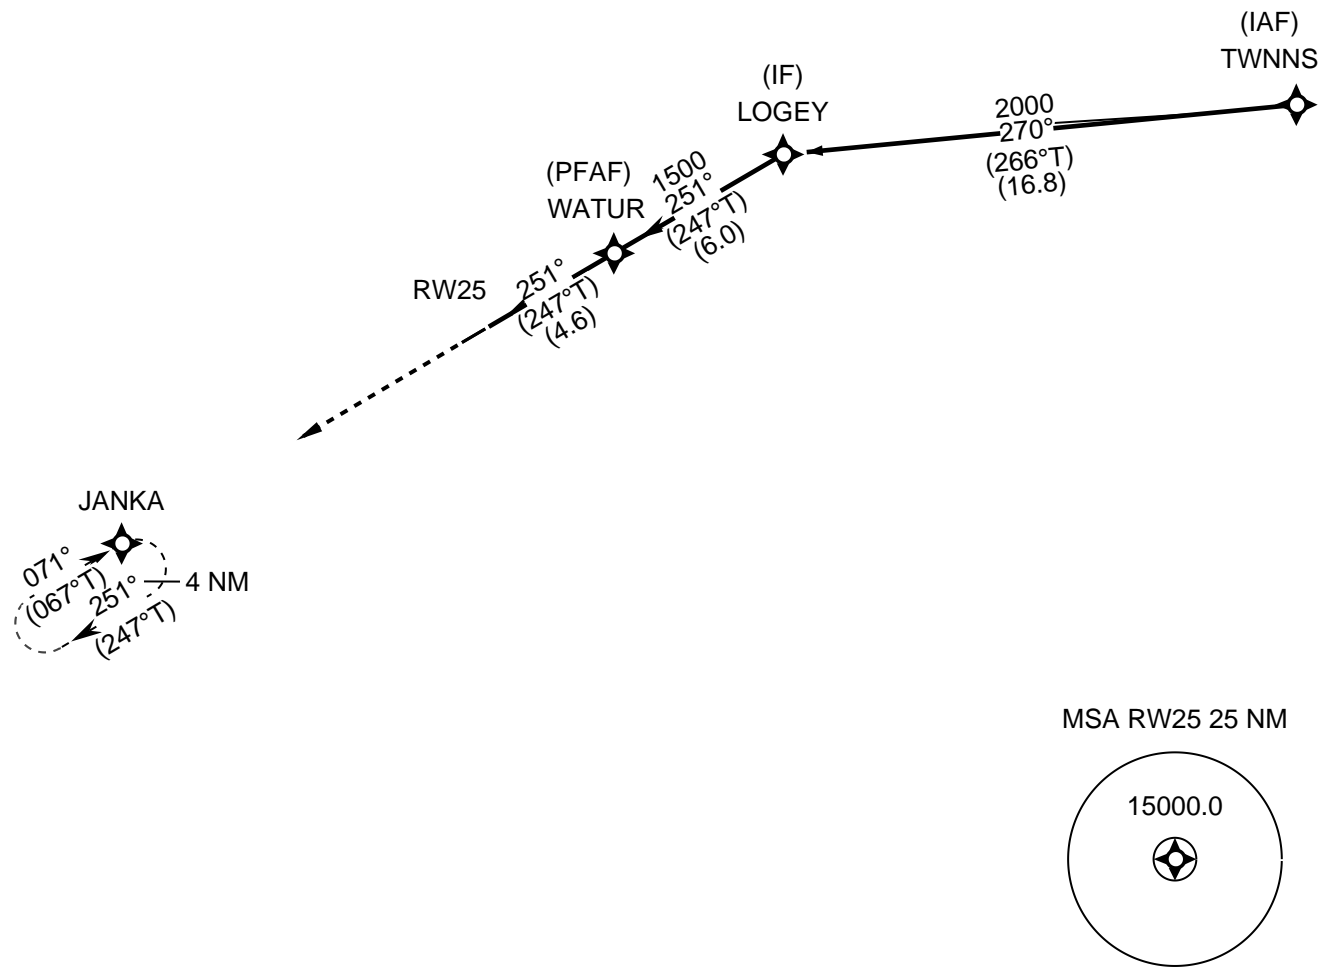

<u>2800</u>	JANKA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).	LOGEY
-------------	-------	--	-------

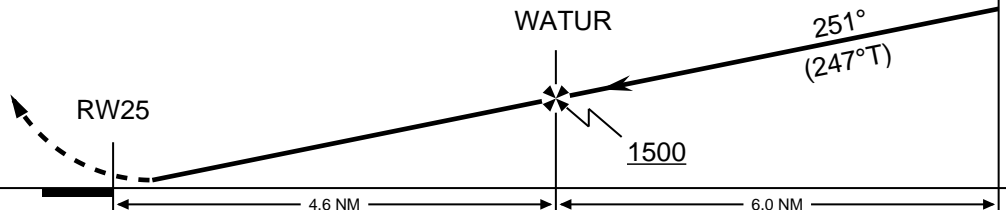

CATEGORY	A	B	C	D
LPV	315-1 308			
LNAV/VNAV	404-1 1/8 397			
LNAV	460-1 453		460-1 3/8 453	
CIRCLING	460-1 453	480-1 473	620-1 3/4 613	660-2 653