

REDFIELD, SOUTH DAKOTA

AL-11624 (FAA)

FIG


WAAS CH 90347 W17A	APP CRS 166°	Rwy ldg TDZE Apt Elev	3500 1309 1309
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17




REDFIELD MUNI (1D8)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3400 direct LAVDE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using ABR altimeter setting. When local altimeter not recieved, use ABR altimeter setting and increase LPV DA to 1643 feet; increase LNAV/VNAV DA to 1738 feet and all visibilities ¼ SM, increase all MDAs 100 feet.	

AWOS 118.525	MINNEAPOLIS CENTER XXX.X XXX.X	(CTAF) 122.80
------------------------	--	-------------------------

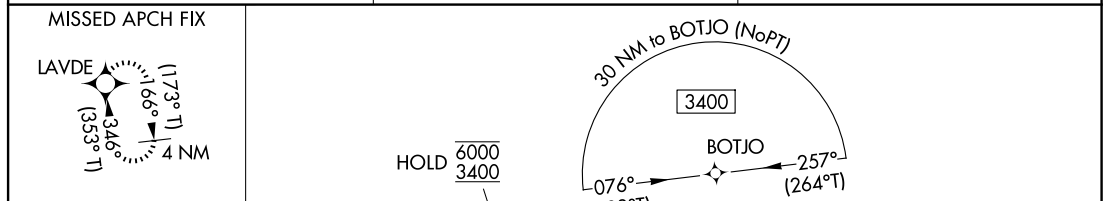

PROTOTYPE: NOT FOR NAVIGATION

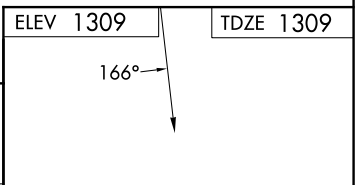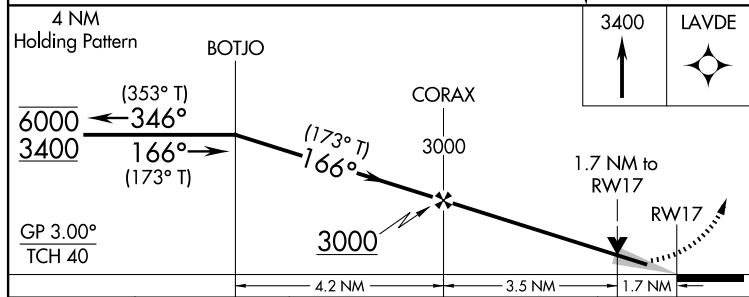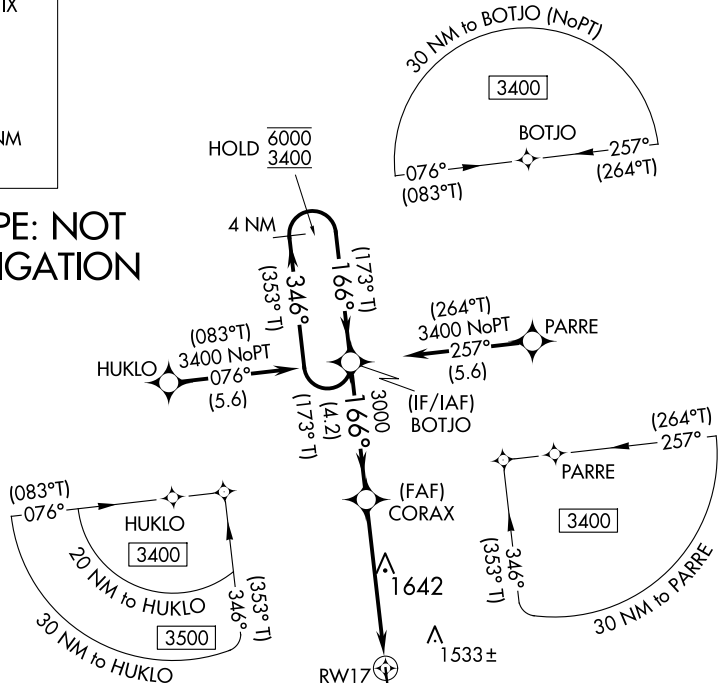

CATEGORY	A	B	C	D
LPV DA	1559-1	250 (300-1)	NA	NA
LNAV/VNAV DA	1645-1	345 (400-1)	NA	NA
LNAV MDA	1900-1	591 (600-1)	NA	NA
CIRCLING	1900-1	591 (600-1)	NA	NA

REDFIELD, SOUTH DAKOTA

Orig FIG

44°51'N-98°32'W

RNAV (GPS) RWY 17

AUTOMATED AL-11624 RNAV (GPS) RWY 17

NC-1

25 NOV 2024

COMPILER: CG

REVIEWER:

DBL CHKR:

EFF: FIG

MIRL Rwy 17-35