

WAAS CH <b>62905</b> <b>W04B</b>	APP CRS <b>042°</b>	Rwy Idg TDZE Apt Elev	<b>7500</b> <b>658</b> <b>672</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 4L

CHICAGO-O'HARE INTL (ORD)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 4R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct OBK VOR/DME and hold.




CHICAGO APP CON	O'HARE TOWERS			GND CON (TWR NORTH)	(TWR CENTER) 121.75 (OBND)	CLNC DEL
<b>119.0 393.1</b>	<b>128.15</b>	<b>348.0</b> (Rwy 9L/27R)	<b>133.0 348.0</b> (10R/28L)	<b>124.125</b>	<b>121.95</b> (IBND)	<b>121.6</b>
	<b>120.75</b>	<b>121.15</b>	<b>126.9 132.7 348.0</b> (CENTER)	<b>118.05</b> (TWR SOUTH)	<b>121.9</b>	
				<b>226.675</b> (ALL TWRs)	<b>134.15</b>	

D-ATIS  
**135.4**  
**282.225**

**RADAR REQUIRED**



CPDLC

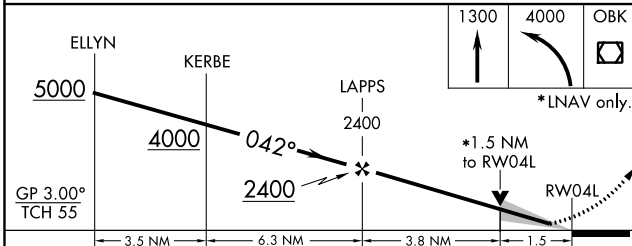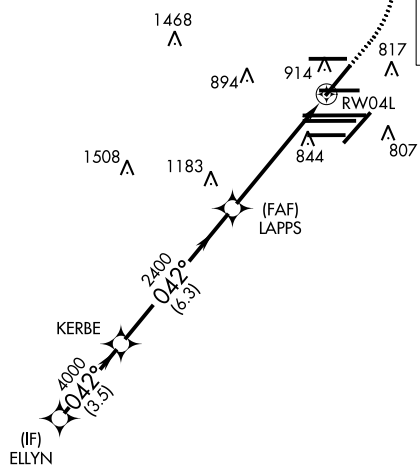

ELEV 672 **D** TDZE 658

042° to RWY04L  
HIRL all Rwy's  
TDZL Rwy 15  
TDZ/CL all Rwy's except 4L, 15 and 33

CATEGORY	A	B	C	D
LPV DA		858/40	200 (200-¾)	
LNAV/VNAV DA		1117-1½	459 (500-1½)	
LNAV MDA	1180/55	522 (600-1)	1180-1½	522 (600-1½)
CIRCLING	1220-1	548 (600-1)	1220-1½ 548 (600-1½)	1240-2 568 (600-2)

EC-3, 06 DEC 2018 to 03 JAN 2019

EC-3, 06 DEC 2018 to 03 JAN 2019