


RNAV (RNP) Z RWY 30


TRI-CITIES (PSC)

APP CRS 301°	Rwy Idg 7503
	TDZE 405
	Apt Elev 410



▼ For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). RF required. GPS required. For inoperative ODALS, increase RNP 0.11 visibility all Cats to 1¼ mile, and increase RNP 0.30 visibility all Cats to 1½ mile.

ODALS  MISSED APPROACH: Climb to 5200 on track 301° to WEDAV, left turn to YOCUY, and on track 254° to PAIDS and hold.

ATIS 125.65	CHINOOK APP CON* 128.75 377.2	TRI-CITIES TOWER* 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
-----------------------	---	--	-------------------------	--------------------------	-------------------------

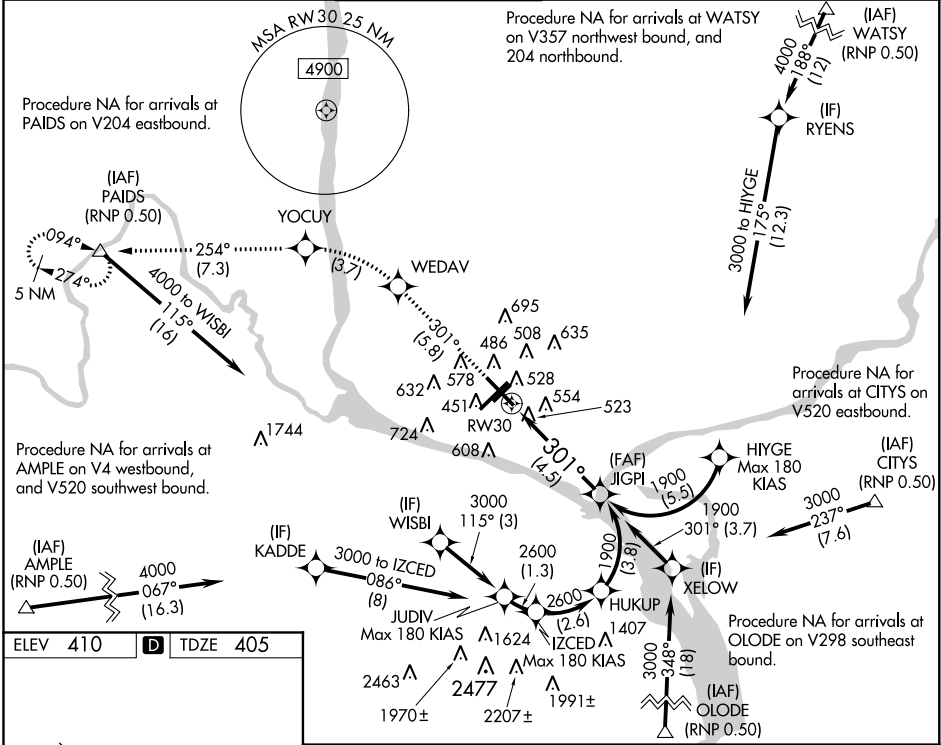

ELEV 410	D	TDZE 405
----------	----------	----------

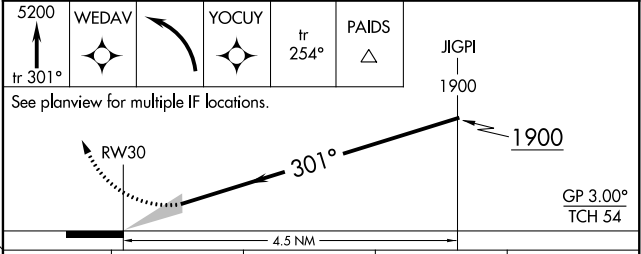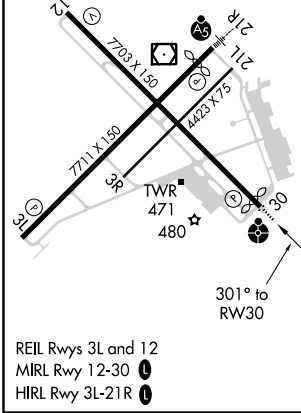

CATEGORY	A	B	C	D
RNP 0.11 DA		778-1⅞	373 (400-1⅞)	
RNP 0.30 DA		834-1¼	429 (500-1¼)	

AUTHORIZATION REQUIRED

NW-1, 06 DEC 2018 to 03 JAN 2019

NW-1, 06 DEC 2018 to 03 JAN 2019