


LOC/DME I-ABI 110.3 Chan 40	APP CRS 355°	Rwy Idg TDZE Apt Elev	7198 1776 1791
--	------------------------	-----------------------------	---

ILS or LOC RWY 35R

ABILENE RGNL (ABI)

ADF Required. For inop ALS, increase S-LOC 35R Cat C/D/E visibility to 1 3/8 SM. ASR **RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 3300 then climbing right turn to 4000 direct TOMHI LOM/INT/I-ABI 6.8 DME and hold.
--	-----------	--

ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

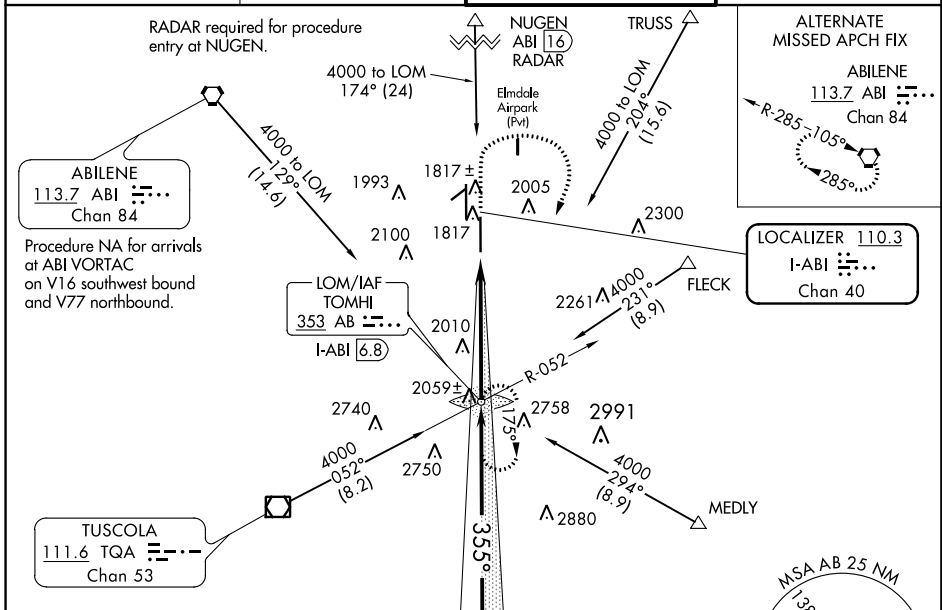

ELEV 1791	D	TDZE 1776
-----------	----------	-----------

REIL Rwy 35L
MIRL Rwy 4-22
HIRL Rwys 17L-35R and 17R-35L

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

3300 	4000 	TOMHI 	TOMHI LOM/INT I-ABI 6.8 Remain within 15 NM		
*LOC only.			3573 175° 355° 4000 3600 GS 3.00° TCH 58		
CATEGORY	A	B	C	D	E
S-ILS 35R	**1976/24		200 (200-1/2)		
S-LOC 35R	2260/24	484 (500-1/2)	2260/50	484 (500-1)	
C CIRCLING	2300-1 509 (600-1)	2320-1 529 (600-1)	2420-1 3/4 629 (700-1 3/4)	2460-2 669 (700-2)	2620-3 829 (900-3)