RNAV (RNP) Y RWY 27L

CHICAGO O'HARE INTL (ORD)

APP CRS	Rwy Idg	7782
273°	TDZE	654
	Apt Elev	680

For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 273° to WASCO and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWERS	GND CON	(TWR CENTER)
135.4	119.0 292.125	128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L)	124.125 (TWR NORTH)	121.75 (OBND)
282.225		120.75 121.15 126.9 132.7 348.0 (CENTER)	118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.9 (IBND)

CLNC DEL 121.6 | CPDLC

RADAR REQUIRED

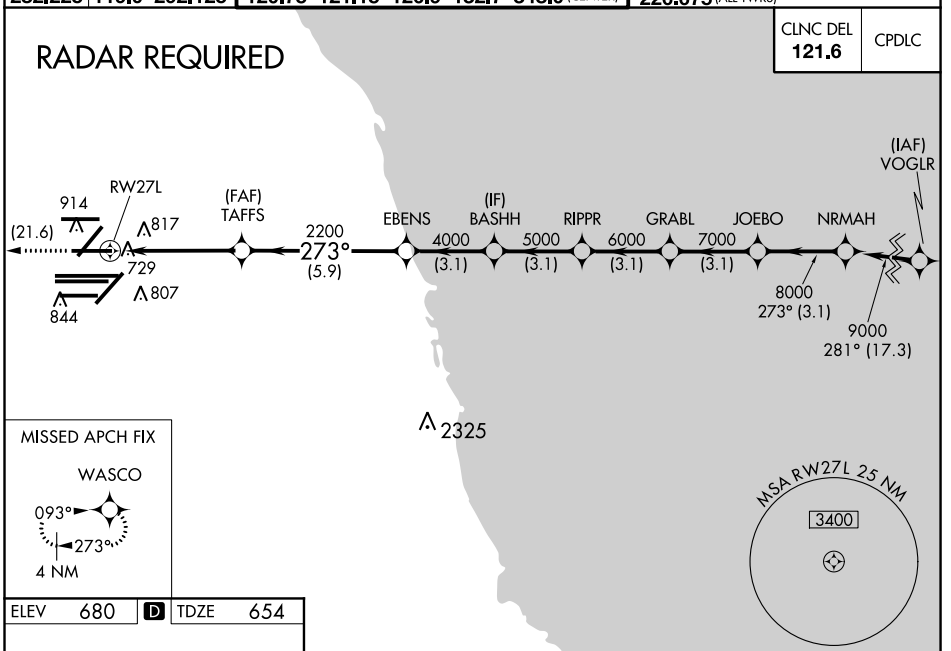

ELEV 680 | D | TDZE 654

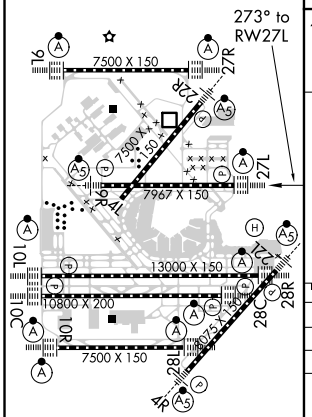

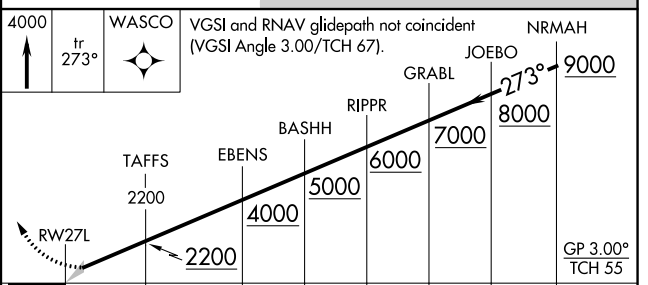

CATEGORY	A	B	C	D
RNP 0.15 DA	992/30	338 (400-⅝)		
RNP 0.30 DA	1162-1¼	508 (500-1¼)		

AUTHORIZATION REQUIRED

EC-3, 31 JAN 2019 to 28 FEB 2019
EC-3, 31 JAN 2019 to 28 FEB 2019