WAAS	APP CRS		
CH **97400**	**095°**	Rwy Idg	**9000**
W09B		TDZE	**1026**
		Apt Elev	**1026**

RNAV (GPS) RWY 9R

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 8L or 8R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct RATCH and on track 092° to CONNI and hold.

D-ATIS	ATLANTA	ATLANTA TOWER					ALL	GND CON			ALL
ARR **119.65**	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
DEP **125.55**	**127.9 379.9**	**119.1**	**125.325**	**123.85**	**119.3**	**119.5**	**254.4**	**121.9**	**121.75**	**121.65**	**254.4**

CLNC DEL **118.1** CPDLC

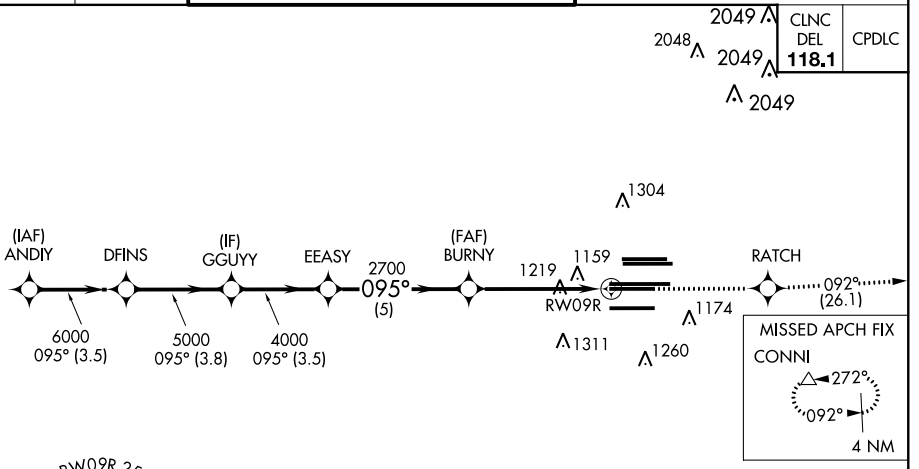



RADAR REQUIRED

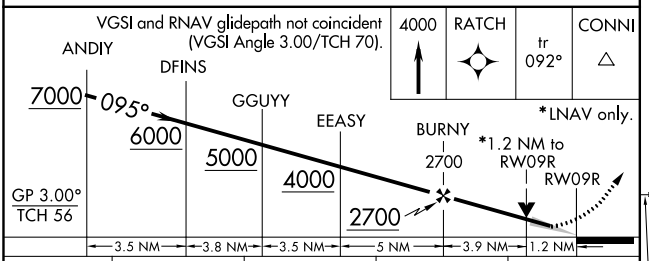

CATEGORY	A	B	C	D
LPV DA	1226/18	200 (200-½)		
LNAV/VNAV DA	1403/40	377 (500-¾)		
LNAV MDA	1480/24	454 (500-½)	1480/45	454 (500-⅞)

ELEV 1026 D TDZE 1026



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 15 AUG 2019 to 12 SEP 2019
SE-4, 15 AUG 2019 to 12 SEP 2019