

LOC I-CVN 108.9	APP CRS 037°	Rwy Idg 7200
		TDZE 4205
		Apt Elev 4216

ILS or LOC RWY 4



CLOVIS MUNI (CVN)

NA When local altimeter setting not received, use Cannon AFB altimeter setting and increase all DA and MDA 40 feet. For inop MALSR, increase S-LOC 4 Cat C/D visibility to 1 1/8 mile. For inop MALSR when using Cannon AFB, increase S-LOC 4 Cat C/D visibility to 1 1/8 mile.

MALSR

MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.

AWOS-3PT 135.375	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF)
----------------------------	--	--------------------------	-------------------------------

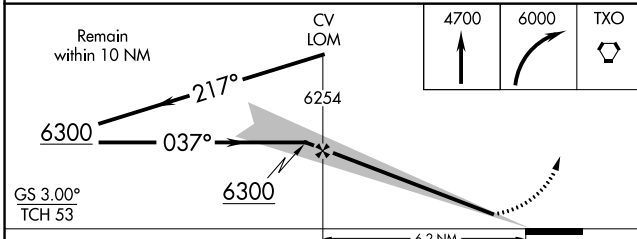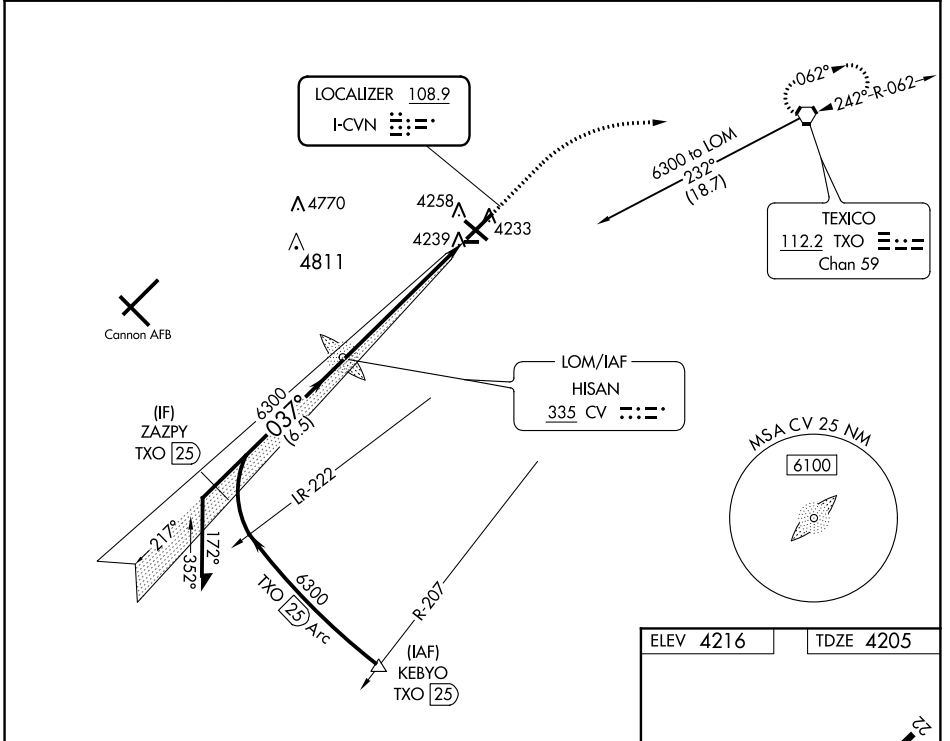

ELEV 4216	TDZE 4205
-----------	-----------

REIL Rwy 12 and 30
MIRL Rwy 4-22 and 12-30

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04

CATEGORY	A	B	C	D
S-ILS 4		4405-1/2	200 (200-1/2)	
S-LOC 4	4680-1/2	475 (500-1/2)	4680-1	475 (500-1)
C CIRCLING	4680-1	464 (500-1)	4700-1 1/2 484 (500-1 1/2)	4820-2 604 (700-2)

SW-1, 15 AUG 2019 to 12 SEP 2019

SW-1, 15 AUG 2019 to 12 SEP 2019