




WAAS CH 56302 W19A	APP CRS 191°	Rwy Idg TDZE Apt Elev	8500 280 285
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19

ALBANY INTL (ALB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). For inoperative MALSR, increase LNAV Cats C/D visibility to RVR 5500. Circling NA west of Rwy 1-19. DME/DME RNP-0.3 NA.	MALSR	MISSED APPROACH: Climb to 3000 direct FLEJG and on track 196° to GROUP and hold.

D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50
-------------------------	--	------------------------------------	-------------------------------	---------------------------

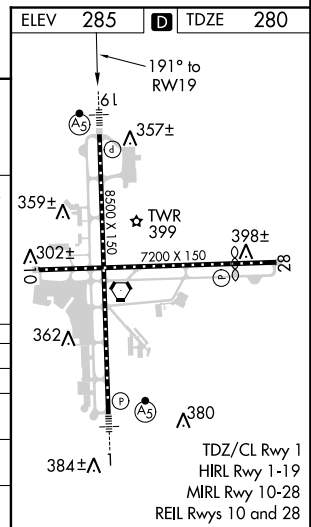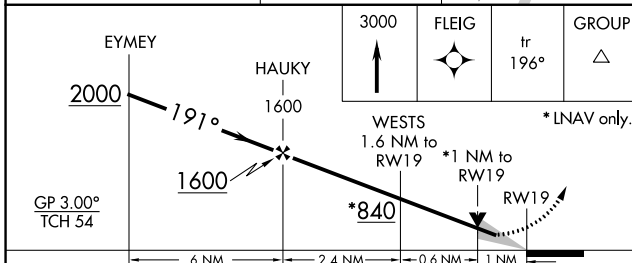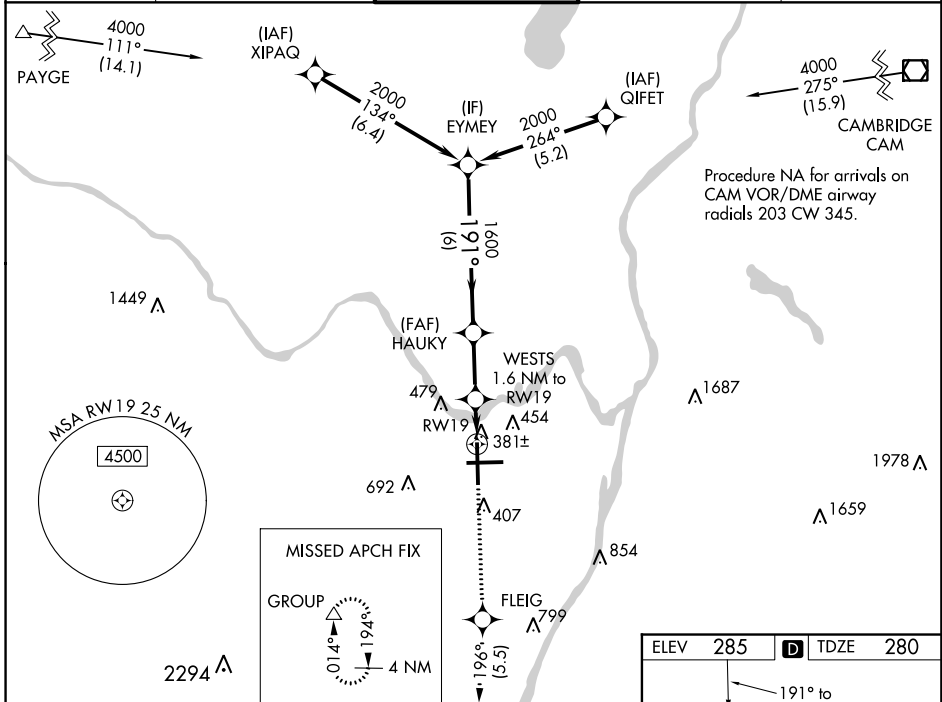

<table border="1"> <tr> <td>3000</td> <td>FLEJG</td> <td>tr 196°</td> <td>GROUP</td> </tr> </table>	3000	FLEJG	tr 196°	GROUP	* LNAV only.			
3000	FLEJG	tr 196°	GROUP					
<table border="1"> <tr> <td>6 NM</td> <td>2.4 NM</td> <td>0.6 NM</td> <td>1 NM</td> </tr> </table>	6 NM	2.4 NM	0.6 NM	1 NM				
6 NM	2.4 NM	0.6 NM	1 NM					
CATEGORY	A	B	C	D				
LPV DA	480/18 200 (200-½)							
LNAV/VNAV DA	590/24 310 (400-½)							
LNAV MDA	640/24	360 (400-½)	640/30	360 (400-⅝)				
CIRCLING	820-1	535 (600-1)	820-1½	960-2¼ 535 (600-1½) 675 (700-2¼)				