ILS or LOC RWY 27

COBB COUNTY INTL-McCOLLUM FIELD (RYY)

LOC I-RYY	APP CRS	Rwy ldg	5374
111.9	273°	TDZE	1011
		Apt Elev	1040

Circling to Rwy 9 NA at night. When local altimeter setting not received, use Hartsfield-Jackson Atlanta Intl altimeter setting and increase all DA/MDA 60 feet; increase S-ILS 27 all Cats and CUMAV fix minimums S-LOC 27 Cats C and D visibility ⅛ mile; increase S-LOC 27 Cat B, Circling Cat C, and CUMAV fix minimums Circling Cat C visibility ¼ mile; increase S-LOC 27 Cats C and D visibility ½ mile.

MALSF

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 050° and ATL VORTAC R-351 to FENTS INT/ RMG 26.2 DME and hold, continue climb-in-hold to 4000.

ATIS	ATLANTA APP CON	McCOLLUM TOWER ★	GND CON	CLNC DEL	UNICOM
128.125	121.0 268.7	125.9 (CTAF) L	119.0	119.0 268.7	122.7

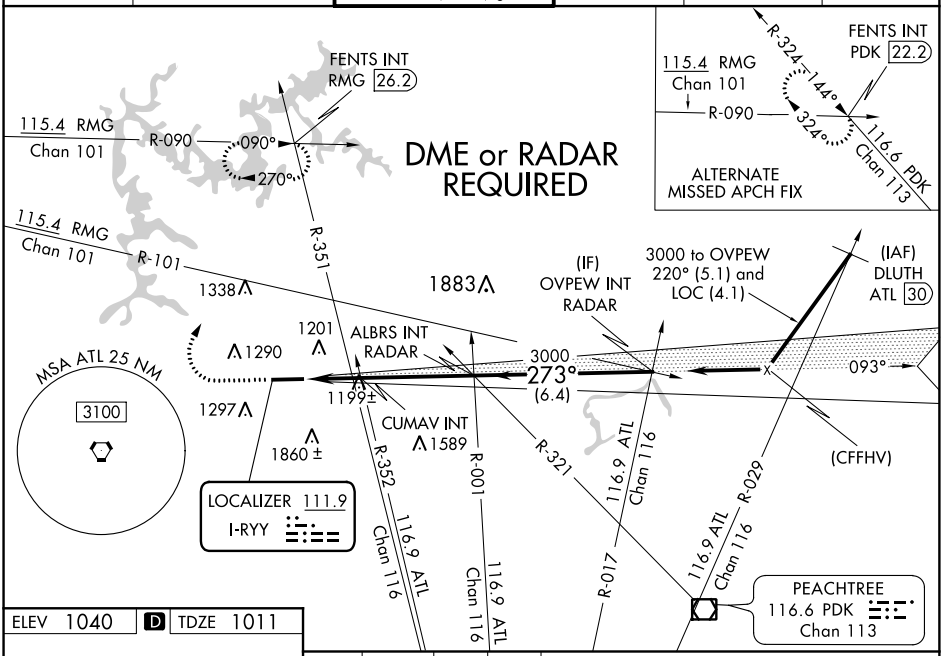

SE-4, 12 SEP 2019 to 10 OCT 2019

ELEV 1040 D TDZE 1011



HIRL Rwy 9-27 L

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

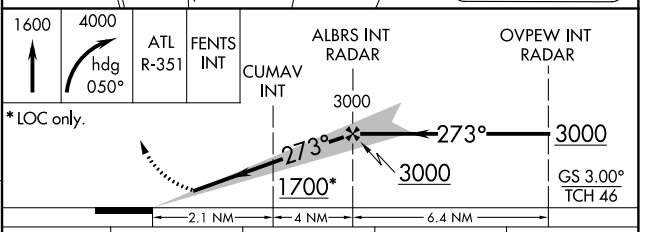

CATEGORY	A	B	C	D
S-ILS 27	1211-¾ 200 (200-¾)			
S-LOC 27	1700-1 689 (700-1)		1700-2 689 (700-2)	
CIRCLING	1780-1 740 (800-1)		1780-2 740 (800-2)	2220-3 1180 (1200-3)
CUMAV FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 27	1460-1 449 (500-1)		1460-1⅜ 449 (500-1⅜)	
CIRCLING	1780-1 740 (800-1)		1780-2 740 (800-2)	2220-3 1180 (1200-3)