

APP CRS	Rwy Idg	<b>9000</b>
<b>275°</b>	TDZE	<b>998</b>
	Apt Elev	<b>1026</b>

# RNAV (RNP) Z RWY 28


HARTSFIELD-JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.



MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER				ALL	GND CON	ALL
ARR <b>119.65</b>	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS (8L-26R,8R-26L)	(9L-27R,9R-27L) 10-28
DEP <b>125.55</b>	<b>127.9 379.9</b>	<b>119.1</b>	<b>125.325</b>	<b>123.85</b>	<b>119.3</b>	<b>119.5</b>	<b>254.4</b>	<b>121.9</b> <b>121.75</b> <b>121.65</b> <b>254.4</b>

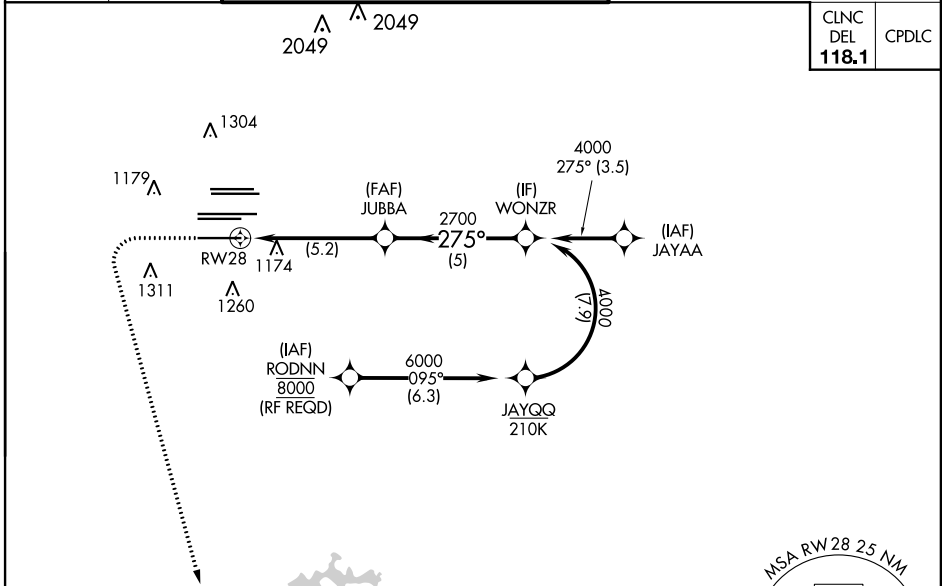




CLNC DEL	CPDLC
<b>118.1</b>	

SE-4, 10 OCT 2019 to 07 NOV 2019

SE-4, 10 OCT 2019 to 07 NOV 2019

ELEV 1026   **D**   TDZE 998

HIRL all Rwys  
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

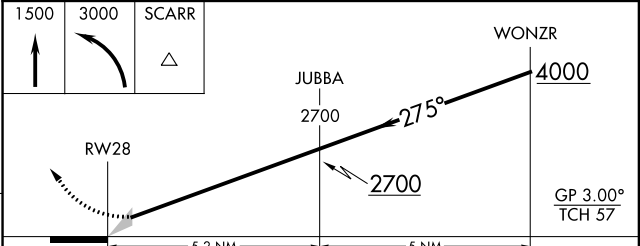

CATEGORY	A	B	C	D
RNP 0.11 DA		1248/24	250 (300-1/2)	
RNP 0.30 DA		1295/24	297 (300-1/2)	

**AUTHORIZATION REQUIRED**