RNAV (GPS) Y RWY 28

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

WAAS	APP CRS	Rwy Idg	9000
CH 61299	275°	TDZE	998
W28A		Apt Elev	1026

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						GND CON			
	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
ARR 119.65											
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1 | CPDLC

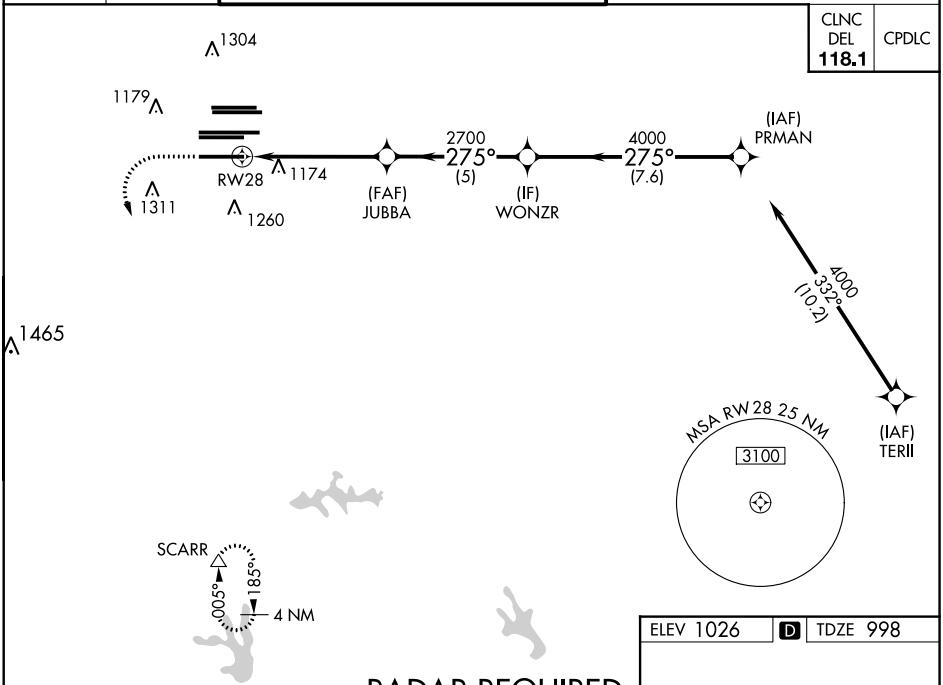

RADAR REQUIRED

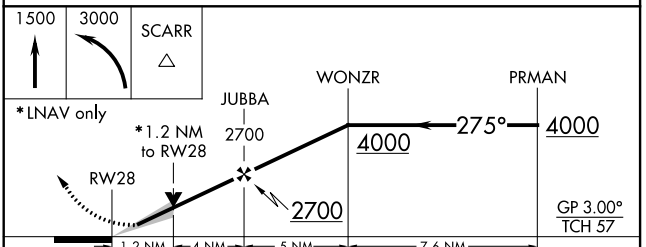

CATEGORY	A	B	C	D
LPV DA	1198/18 200 (200-½)			
LNAV/VNAV DA	1250/24 252 (300-½)			
LNAV MDA	1440/24 442 (500-½)		1440/45 442 (500-⅞)	

ELEV 1026 | D | TDZE 998



275° to RW28

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 10 OCT 2019 to 07 NOV 2019
SE-4, 10 OCT 2019 to 07 NOV 2019