RNAV (GPS) RWY 27R

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Idg	7500
CH 69508	273°	TDZE	664
W27B		Apt Elev	680

RNP APCH.
RADAR required for procedure entry.
For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct UMUZI and hold.

D-ATIS	CHICAGO	O'HARE TOWERS	GND CON (TWR CENTER)
135.4	APP CON	128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L)	124.125 (TWR NORTH) 121.75 (OBND)
282.225	119.0 292.125	120.75 121.15 126.9 132.7 348.0 (CENTER)	118.05 (TWR SOUTH) 121.9 (IBND)
			226.675 (ALL TWRS)

CLNC DEL 121.6 | CPDLC

MISSED APCH FIX

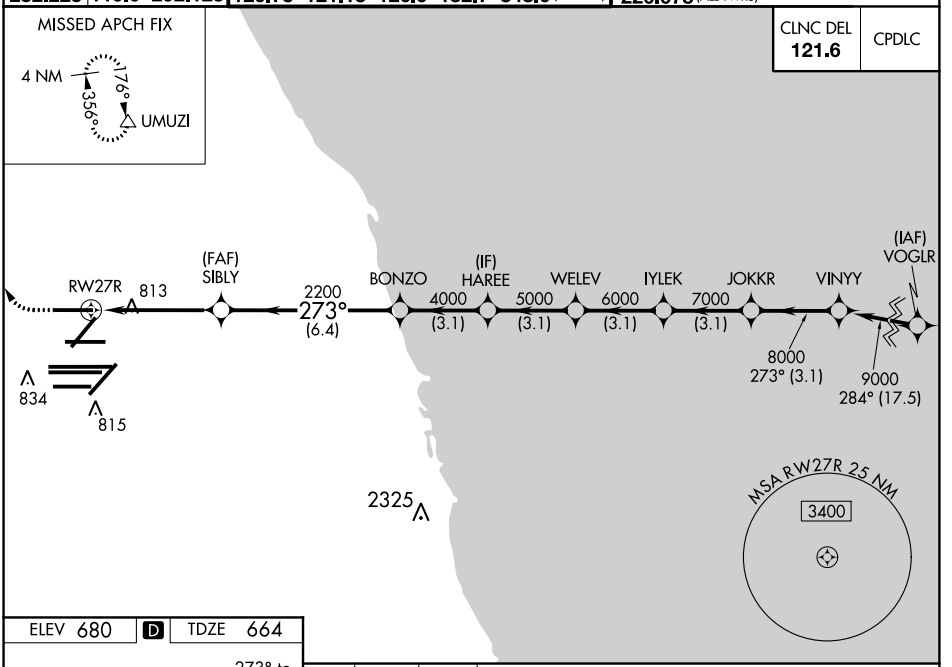

ELEV 680 | D | TDZE 664

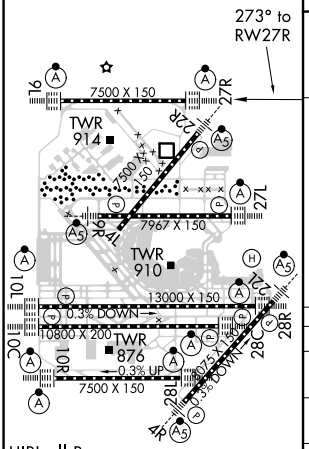

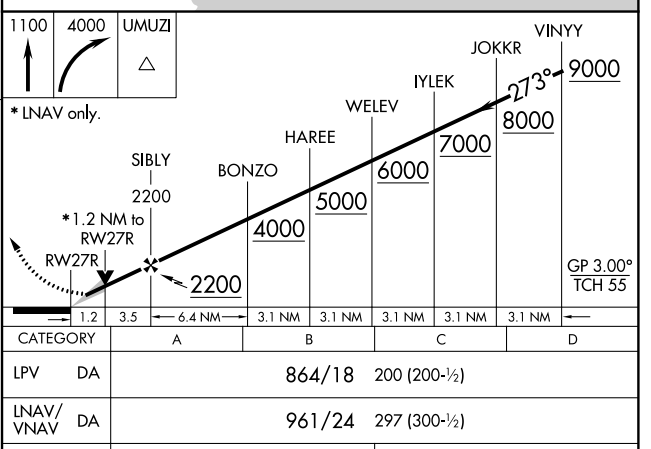

CATEGORY	A	B	C	D
LPV DA	864/18 200 (200-½)			
LNAV/VNAV DA	961/24 297 (300-½)			
LNAV MDA	1120/24 456 (500-½)		1120/45 456 (500-⅞)	

EC-3, 10 OCT 2019 to 07 NOV 2019
EC-3, 10 OCT 2019 to 07 NOV 2019