

WAAS CH 62905 W04B	APP CRS 042°	Rwy Idg TDZE Apt Elev	7500 658 672
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4L

CHICAGO O'HARE INTL (ORD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 4R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct OBK VOR/DME and hold.



CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6
---	--	---	---	--------------------------

D-ATIS 135.4 282.225
--


RADAR REQUIRED



CPDLC

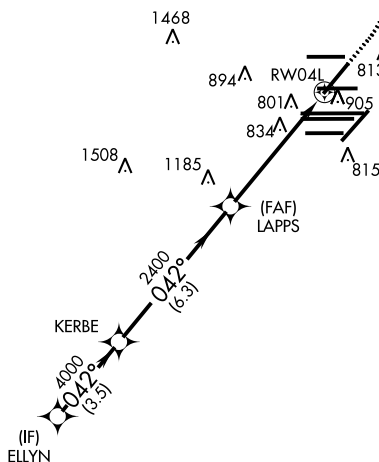

2325 A

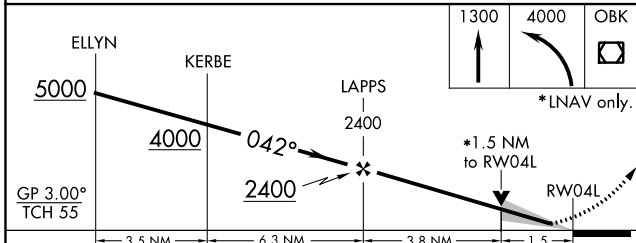

ELEV 672	D	TDZE 658
----------	----------	----------

0.3% DOWN
0.3% UP

0.42° to RWY04L

HIRL all Rwys
TDZ/CL all Rwys except 4L

CATEGORY	A	B	C	D
LPV DA		858/40	200 (200-¾)	
LNAV/VNAV DA		1117-1½	459 (500-1½)	
LNAV MDA	1180/55	522 (600-1)	1180-1½	522 (600-1½)
CIRCLING	1220-1	548 (600-1)	1220-1½ 548 (600-1½)	1240-2 568 (600-2)