

WAAS CH 93839 W28E	APP CRS 275°	Rwy ldg TDZE Apt Elev	7500 667 680
--	------------------------	-----------------------------	---



RNAV (GPS) Y RWY 28L

CHICAGO-O'HARE INTL (ORD)


RNP APCH:
 Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.

ALSF-2
 MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)		GND CON (TWR CENTER) 124.125 (TWR NORTH) 121.75 (OBND) 118.05 (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRs)
--	---	--	--	---

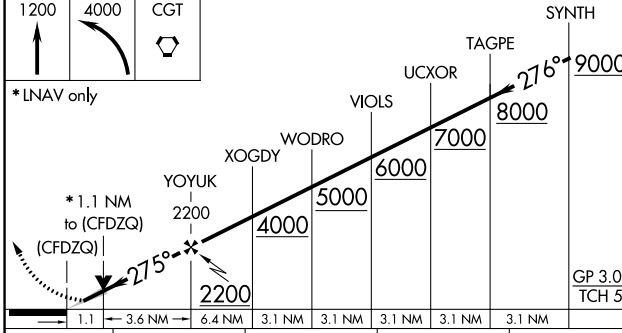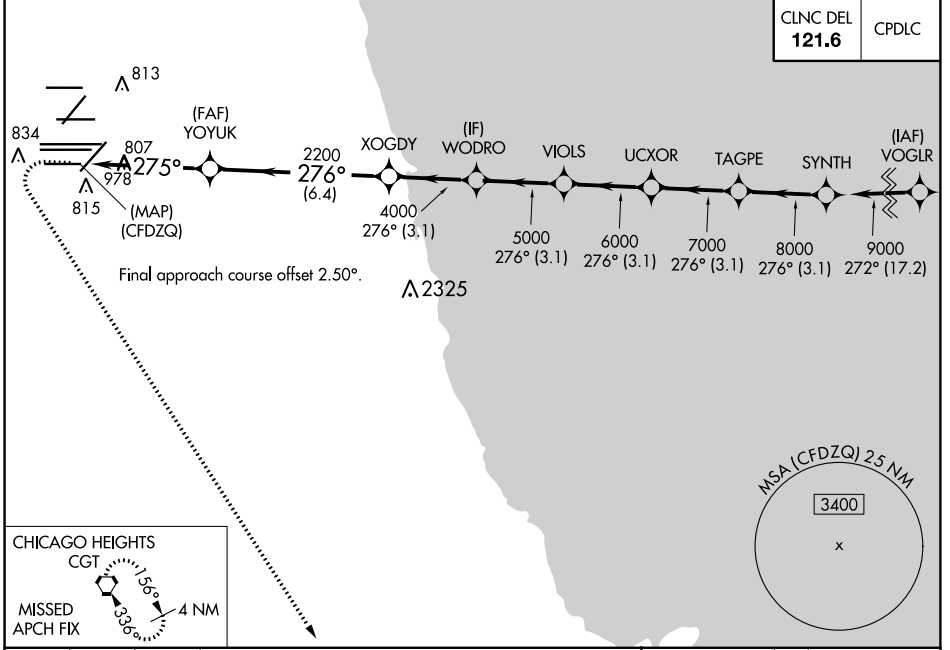

CATEGORY	A	B	C	D
LPV DA	917/24		250 (300-1/2)	
LNAV/VNAV DA	1090/40		423 (500-3/4)	
LNAV MDA	1060/24 393 (400-1/2)		1060/35 393 (400-5/8)	

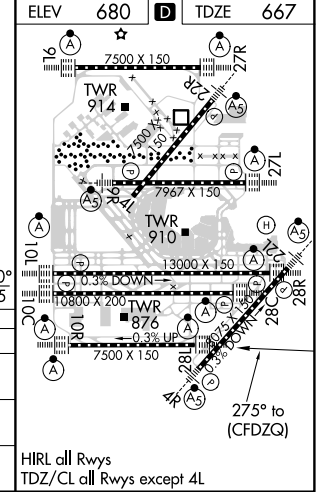

EC-3, 10 OCT 2019 to 07 NOV 2019

EC-3, 10 OCT 2019 to 07 NOV 2019