




WAAS CH <b>70316</b> <b>W17A</b>	APP CRS <b>175°</b>	Rwy Idg TDZE <b>25</b> Apt Elev <b>25</b>	<b>7000</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 17

TEXAS GULF COAST RGNL (L.B.X)

<p><b>▽</b> DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F). If local altimeter setting not received, use William P Hobby altimeter setting and increase all DAs/MDAs 100 feet. Baro-VNAV and VDP NA when using William P Hobby altimeter setting. Circling NA east of Rwy 17-35. For inop MALSR, increase LPV visibility to 1 mile all Cats, LNAV Cat D visibility to 1¼ mile.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 2000 direct ACKLE and hold.</p>
	<p>2000</p>	

ASOS <b>119.925</b>	HOUSTON APP CON <b>134.45 284.0</b>	CLNC DEL <b>125.2</b>	UNICOM <b>123.0 (CTAF)</b> <b>U</b>
------------------------	--	--------------------------	--

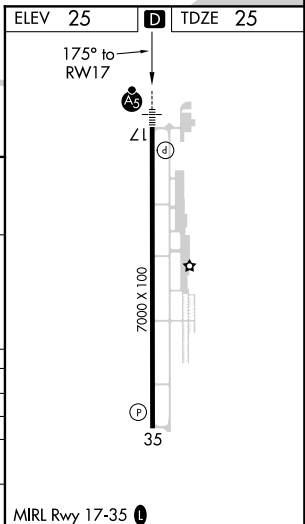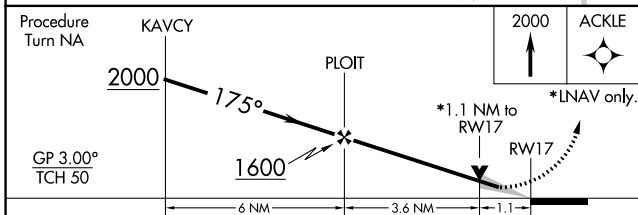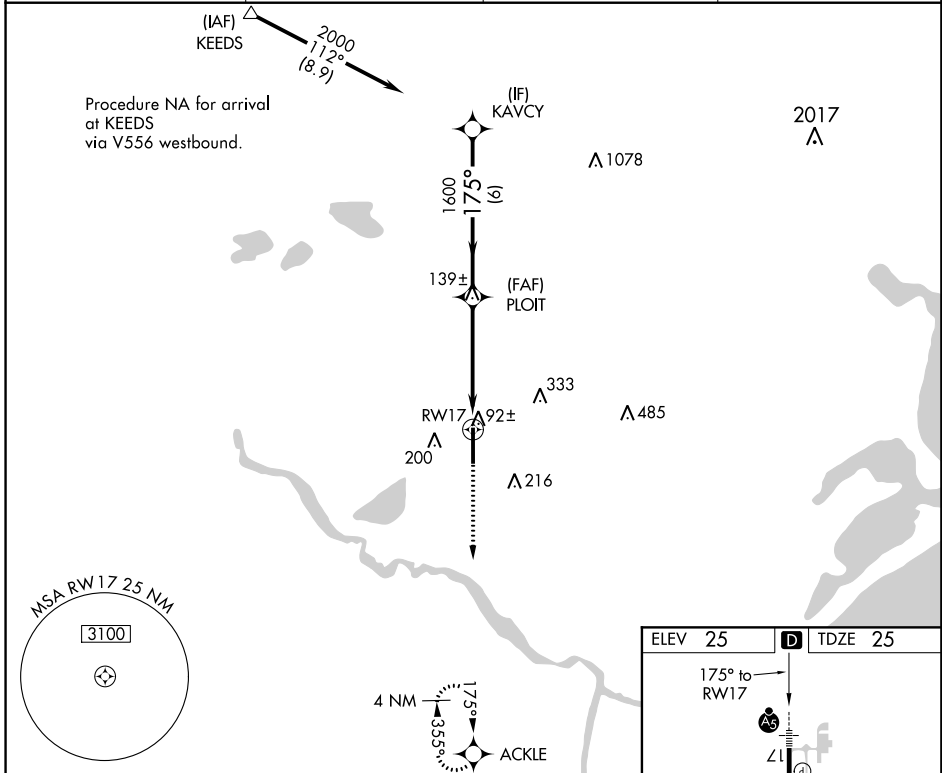

CATEGORY	A	B	C	D
LPV DA		282-1/2	257 (300-1/2)	
LNAV/VNAV DA		360-3/4	335 (400-3/4)	
LNAV MDA		420-1/2	395 (400-1/2)	420-1 395 (400-1)
CIRCLING	480-1 1/4 455 (500-1 1/4)	500-1 1/4 475 (500-1 1/4)	500-1 1/2 475 (500-1 1/2)	580-2 555 (600-2)